

AT MICROFICHE
REFERENCE
LIBRARY

A project of Volunteers in Asia

Standard Trail Suspended and Suspension Bridges
Volumes A and B

Published by:

Ministry of Works and Transport, Roads Dept.
Swiss Association for Technical Assistance
P.O. Box 113
Kathmandu
Nepal


This publication is out of print in 1983.

Reproduced by permission of the Roads Department,
Ministry of Works and Transport, Kingdom of Nepal
and the Swiss Association for Technical
Assistance.

Reproduction of this microfiche document in any
form is subject to the same restrictions as those
of the original document.

H.M.G. OF NEPAL MINISTRY OF WORKS AND TRANSPORT, ROADS DEPARTMENT
SATA, SWISS ASSOCIATION FOR TECHNICAL ASSISTANCE

PART A

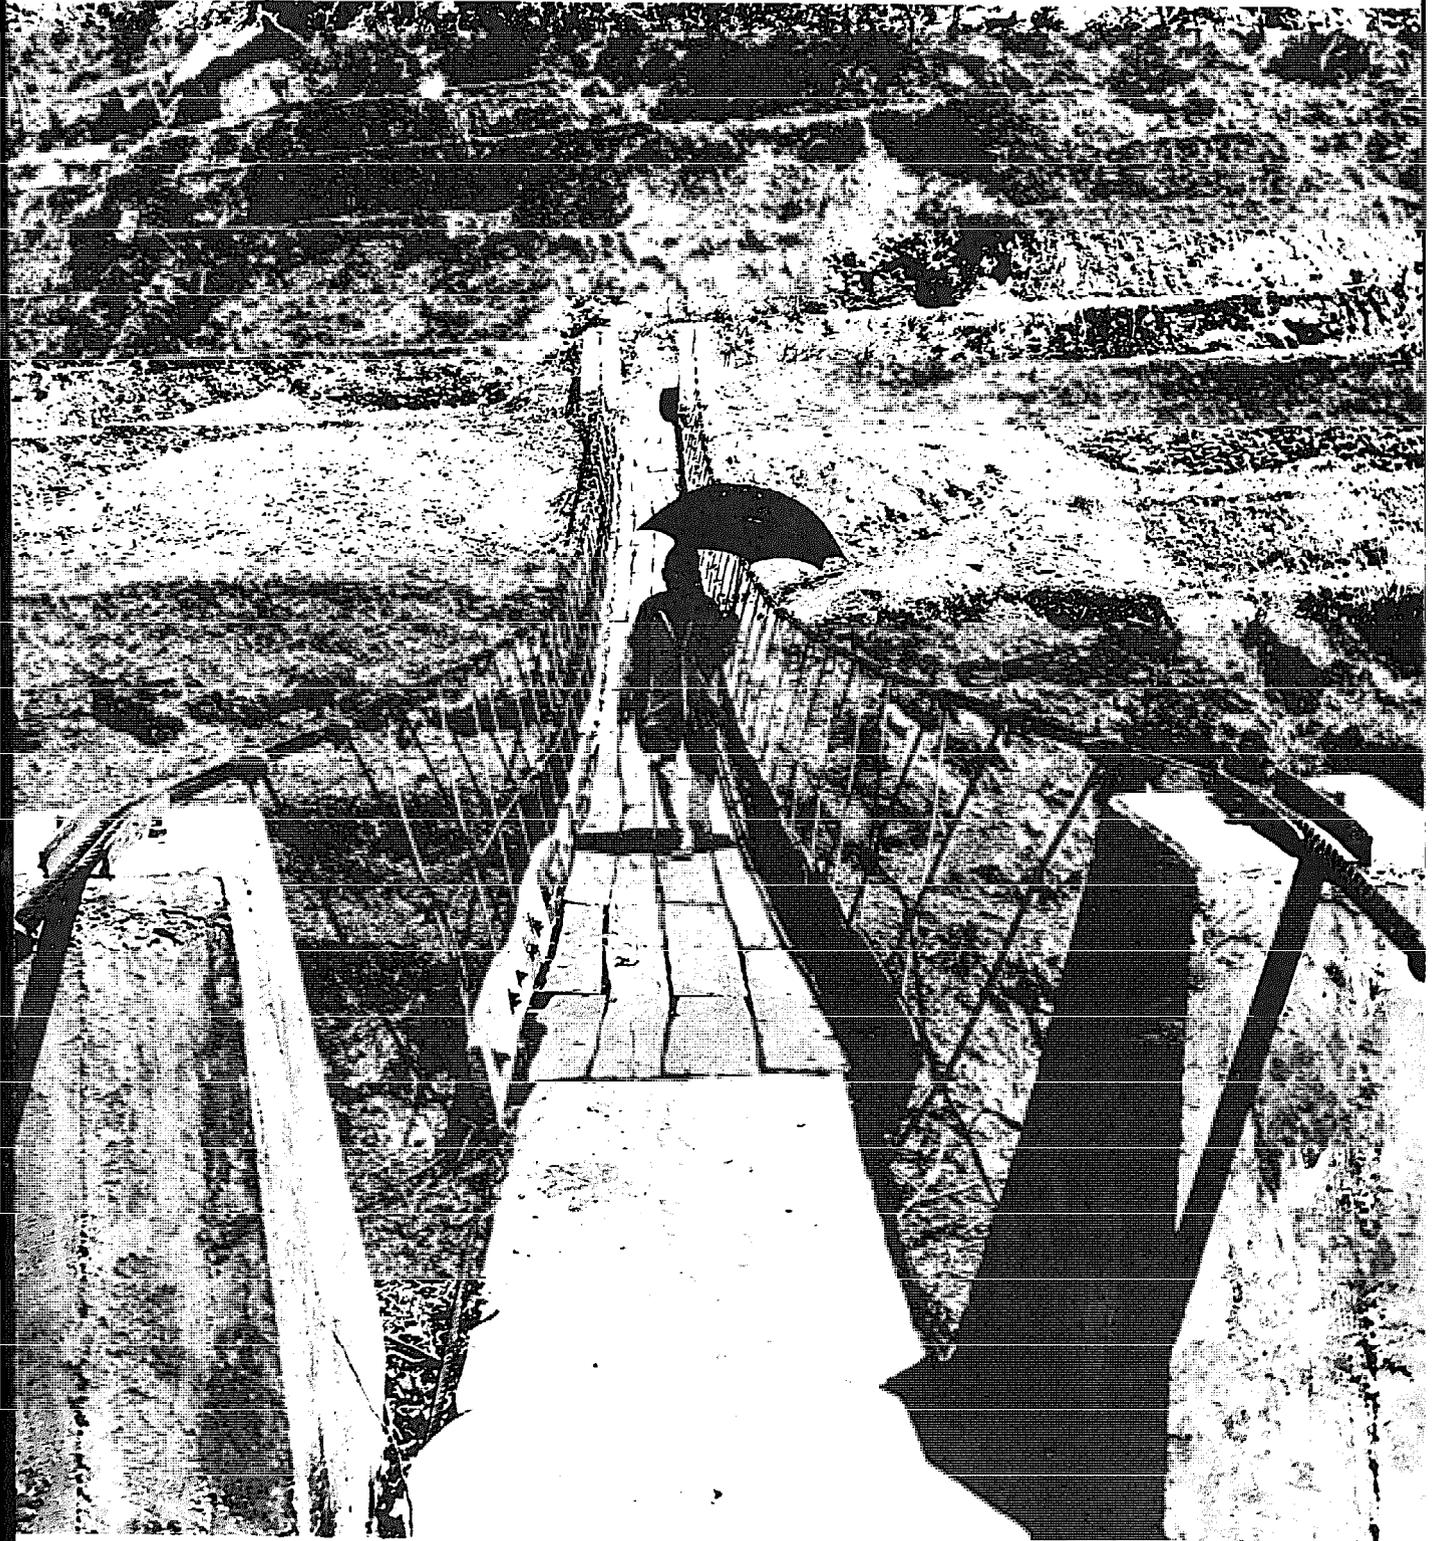

PLANNING, DESIGN AND SURVEY OF
STANDARD TRAIL SUSPENDED
AND SUSPENSION BRIDGES

Part A: Planning design and survey

1. Types of trail suspension or suspended bridges
2. Bridge design
3. Structural analysis
4. Survey of bridge sites
5. Construction work
6. Machines and tools

330 Steel drawings for the standard suspended and suspension bridges are available from the Suspension Bridge Division of HMG Roads Department

Part B: Execution and maintenance

7. Cost estimate
8. Lay out
9. Construction
10. Bridge erection
11. Trail improvement
12. Maintenance
13. Photos of standard steel parts

330 Steel drawings for the standard suspended and suspension bridge are available from the Suspension Bridge Division of HMG Roads Department

PREFACE to the second enlarged edition

The manual for construction of suspension bridges will be quite helpful to the engineers who will construct suspension bridges in Nepal. It contains the details of methods of surveying, calculations and design procedures. Previously we did not have any such manual having so much in detail. I have no doubt that this manual will help all the engineers who will construct suspended and suspension bridges, especially those who will be newcomers and work for construction of trail suspension bridges.

At the same time I must appreciate the commendable work done by Mr. H. Pfaffen, civil engineer with SATA.

C. B. Pradhanang

Superintending Engineer

Kathmandu, March 1977

The manual for Trail Suspension Bridges which first appeared in autumn 1975 has now been reedited for this second enlarged edition. The contents were increased at the wish of many for an extensive treatment of the deliberation and analysis necessary to plan, design, estimate and construct standardized bridges.

The suspended bridge (bridge without pylons) was completely accepted as an equally valid solution to the suspension bridge, its standardized design has also been taken into full consideration.

We have not attempted to cover the entire field of the bridge construction work, but rather to select some of the most important sections for unstiffened suspension bridges and their foundation constructions with a special reference to a practical and economical engineering work. It has been assumed that our readers already have a basic knowledge of engineering work and we hope that they will find this book both instructive and covering the matters for execution of trail bridges.

For further assistance we recommend the standardized designs of steelwork for suspended and suspension bridges of HMG's Roads Department compiled with SATA, Swiss Association for Technical Assistance. The quantity of work has, however, been such, that the 330 plans for the unit - construction bridge systems could not be included in this manual. These drawings have been worked out and are available from the Suspension Bridge Division.

This edition was financed by SATA. At the same time I would like to thank all at the Suspension Bridge Division for their helpful comments, especially the SATA engineers Leo Condrau and Robert Groeli for their unvaluable help to complete this manual.

Hans Pfaffen

SATA

Kathmandu, March 1977

PREFACE to the first edition

The descriptions given in this book will be quite helpful specially to those who will be working for suspension bridge projects for the first time. The tables and formulas given will enable the surveyors to work out the calculations on site itself. The instructions to be followed during the construction period will help all the bridge builders to avoid the mistakes that may even lead to the failure of bridges.

C. B. Pradhanang
Superintending Engineer
Suspension Bridge
Division

Kathmandu, September 1975

The Suspension Bridge Division should construct more than 50 foot - trail suspension bridges throughout the country during the 5th Plan (1975 - 1980) period. Past experience has shown that little technical training was provided for newcomers in the field of suspension bridge design and construction work. The Manual as presented now, is in a preliminary phase and should serve as a basis for future technical training. In advance I would like to thank those who will give critical suggestions, and help for adding new pages.

H. Aschmann
SATA

Kathmandu, September 1975

PART A

- 1. TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES**
- 2 BRIDGE DESIGN**
- 3 STRUCTURAL ANALYSIS**
- 4 SURVEY OF BRIDGE SITES**
- 5 CONSTRUCTION WORK**
- 6 MACHINES AND TOOLS**

PART B

- 7 COST ESTIMATE**
- 8 LAY OUT**
- 9 CONSTRUCTION WORK**
- 10 BRIDGE ERECTION**
- 11 TRAIL IMPROVEMENT**
- 12 MAINTENANCE**
- 13 PHOTOS OF STANDARD STEEL PARTS**

PART A

PLANNING, DESIGN AND SURVEY

EXECUTION AND MAINTENANCE REFER TO PART B

CONTENTS

I. TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

- 1.1 General Design, Dhaunebagar, Chacklighat, Kothe Bridge, Maurasain, Jauljibi, Mangmaya Khola, Sekhathum, Purchudi Hat, Nibu Khola, Chilimay Khola, Golgung Khola, Sukhadik, Lodey Chat, Pikuwa Khola, Khoranga Khola
- 1.2 Photos of Suspension and Suspended Bridges
- 1.3 Completed Pedestrian Bridges by HMG' Roads Department Planning by HMG' Suspension Bridge Division of the RD

2. BRIDGE DESIGN

- 2.1 Nomenclature for Suspended and Suspension Bridges
- 2.2 Parabolas, Graphical Method, Factor Method, Suspender Length, Analytical Method
- 2.3 Design Specification for Standard Suspension Bridges, Technical Data, Reaction on the Pylon Base, Stabilizing and Spanning Cables, Available Standard Drawings
- 2.4 Design Specification for Standard Suspended Bridges, Technical Data, Available Standard Drawings
- 2.5 Wind - Bracings for Suspended and Suspended Bridges
- 2.6 Single Cable under uniformly distributed Load, Stiffness, Single Cable under uniformly distributed Load, inclined Span
- 2.7 Single Cable under concentrated single Load (e.g. Cable car) with one Example
- 2.8 Calculation Example for a Suspension Bridge, Analysis for the Cable Forces on a three Span Suspension Bridge
- 2.9 Calculation Example for a Suspended Bridge

3. STRUCTURAL ANALYSES

- 3.1 Soils and Soil Investigation, Bearing Capacity of Soils
- 3.2 Excavation for Foundation, Inclination of Slope, Trench Timbering
- 3.3 Placing of Foundation, the Swedish Circle Methods

- 3.4 Drainage and Backfilling
- 3.5 Retaining Walls and Foundation Structures for Suspended and Suspension Bridges, Active Earth Pressure, Structure Stability of Anchor Blocks, Walls etc., Types of Walls, Drystone Retaining Wall, Breast Wall, Pitching, Calculation Example for a Retaining Wall, Design of Gravity Wall, Semigravity and Cantilever Wall
- 3.6 Anchor Blocks for Suspension and Suspended Bridges, Gravity Block Typ No. 1, Gravity/Earth Block Typ No. 2, Gravity/Rock Block Typ No. 3, Rock Anchor Typ No. 4
- 3.7 Design of Gravity Anchor Block, Calculation Example for a Main Anchor Block for a Suspended Bridge (without taking any Earth Pressure into Account), Calculation Example for a Wind Guy Anchor Block, Calculation Example for a Gravity/Rock Block for a Suspended Bridge, Example for a Rock Anchorage, Factor of Friction for Inclined Foundation Bottom
- 3.8 Passive Earth Pressure on an Anchor Wall, Calculation Example for an Anchor Wall (Deadman used as Main Cable Anchorage), Calculation Example of a Deadman as wind guy Anchorage, Calculation Example of an Anchorage Block for a Suspended Bridge utilizing the Passive Earth Pressure
- 3.9 Double Eccentric Loading, Coefficient for Calculation the max. Soil Bearing of Bi-Axial and Eccentric compressed Foundations, Calculation Example for a Pylon Foundation, Calculation Example for an Anchor Block used as Wind Guy and Side Stay Cable Anchorage, Dimensioning in Reinforced Concrete Construction taking the Axial Compression Force into Account, Bending Moments, Shearing Forces and Deflection, Trigonometry, General Conversion Tables, Mensuration of Areas and Volumes, Colour Indication of Temperature of Steel, Calculation of Anchor Rods and Hooks

4. SURVEY OF BRIDGES SITES

- 4.1 Site Selection and Technical Report
- 4.2 Site Survey after site Selection, Survey Methods, Tacheometric Survey, Distances Across the River, Levelling of Bench Marks, "Step-method" for profile and measurement, Measurement of Horizontal Distances on Slopes, Survey Instruments, Levelling and Theodolite

- 4.3 Soil Investigation, Field Tests, Laboratory Tests, Classification
- 4.4 Evaluation of the Survey

5. CONSTRUCTION MATERIAL

- 5.1 Steel Cables, Damage during Transportation and Unreeling, Unreeling the Cables, Cables from India, Cables from Japan, Used Rope Way Cables, Wires P.W.C. (parallel wire cluster)
- 5.2 Cable Fittings, Thimbles, Cable End fixed with Bulldog Grips and Thimbles, Fixed by Drum and Cable End Clamp, Joint Sealer, Application of the Joint Sealer
- 5.3 Steel, Equal Angles, Channels, Rounds, Rods, Bars, Flats, Plates, Rivet and Bolt, Ribbed Torsteel for Reinforced Concrete
- 5.4 Concrete, Recommended Mixes
- 5.5 Timber, Wood, Permissible Stresses, Round Column, Planks, Buckling Numbers (DIN 1052)

6. MACHINES AND TOOLS

- 6.1 Rock Drilling, General Description, Operation and Maintenance, Toolbag, 7/8 inch integral Drill Steel, Grinding of Drill Bits
- 6.2 Pulley System (Hoist Block), Different Combination, Load Calculation by using of Pulley
- 6.3 Pulling Machines, Tirfor, Habegger, Accessories
- 6.4 Different Tools

7. COST ESTIMATE

- 7.1 Planning and Execution Chart for Construction Work on Suspended and Suspension Bridges
- 7.2 Cost Estimate (Rate Analysis) for Suspension Bridges, Photos of Execution Work, Cost Estimate for Suspended Bridges (Rate Analysis), green printed

- 7.3 Quotation Form for a Standard Suspension Bridge's Steelconstruction etc.
- 7.4 Quotation Form for a Standard Suspended Bridge's Steelconstruction etc.
- 7.5 "Terms of Steelwork" for Suspension and Suspended Bridges as an integral Part of the Quotation Forms
- 7.6 Network of Roads in Nepal, Distances and Conditions of the Roads, Planning of the Road Construction until 1984

8. LAYOUT

- 8.1 Fixing of the Bridge Position, Lay Out of the Blocks, Main Anchorage, Pylon Foundation, Lay Out along a Parallel to the Bridge Centre Line, Wind-Guy Anchorage
- 8.2 Suspended Bridge, Main Anchor Block

9. CONSTRUCTION WORK

- 9.1 General, Collection of Materials
- 9.2 Excavation, Normal Excavation, Trench Excavation, Rock Excavation, Drilling, Blasting, Rock Anchor
- 9.3 Concrete and Masonary Work, Main Anchor Block of a Suspension Bridge, Pylon - and Walk Way Anchorage, Main Anchor Block of a Suspended Bridge, Wind Guy Anchorage, Concrete and Masonary Work, Lay Out of a Suspension Bridge, Photos of Anchorage Parts for a Suspended Bridge, Lay Out of a Suspended Bridge, Fitting of a Main Anchor Block, Fitting of a Main Anchorage
- 9.4 River Bank and Soil Protection

10. BRIDGE ERECTION

- 10.1 Suspension Bridge, Pylon, Pylon Assembling Standard Drawing 90/52, Suspension Bridge, Pylon
- 10.2 Suspension Bridge, Hoisting

- 10.3 Suspension Bridge, Suspenders and Walkway
- 10.4 Suspension Bridge, Wind Guy and Windtie
- 10.5 Finishing Off
- 10.6 Suspended Bridge, Fitting of Anchor Parts, Walk - Way Assembling
- 10.7 Single Wire (parallel wire cluster), Erection, P.W.C. Cable Anchorage, Details
- 10.8 Final Check - Up, Curvature of the Suspension Bridge, Pre-Stress in Cable, Check of all Nuts, Tightening of Bulldog Grips and Turn Buckles, Arrangements for Cable Ends, Fitting of Wire Mesh Netting

11. TRAIL IMPROVEMENT

- 11.1 Maintenance Report of Local Bridges with many Photos

12. MAINTENANCE


- 12.1 Maintenance, General
- 12.2 Maintenance Report of the Adamghat Bridge
- 12.3 Maintenance Report of the Jairamghat Bridge

13. PHOTOS OF STANDARD STEELPARTS

- 13.1 Standardized Steelparts for Suspension Bridges
- 13.2 Standardized Steelparts for Suspended Bridges

INDEX

At the End of the Manual

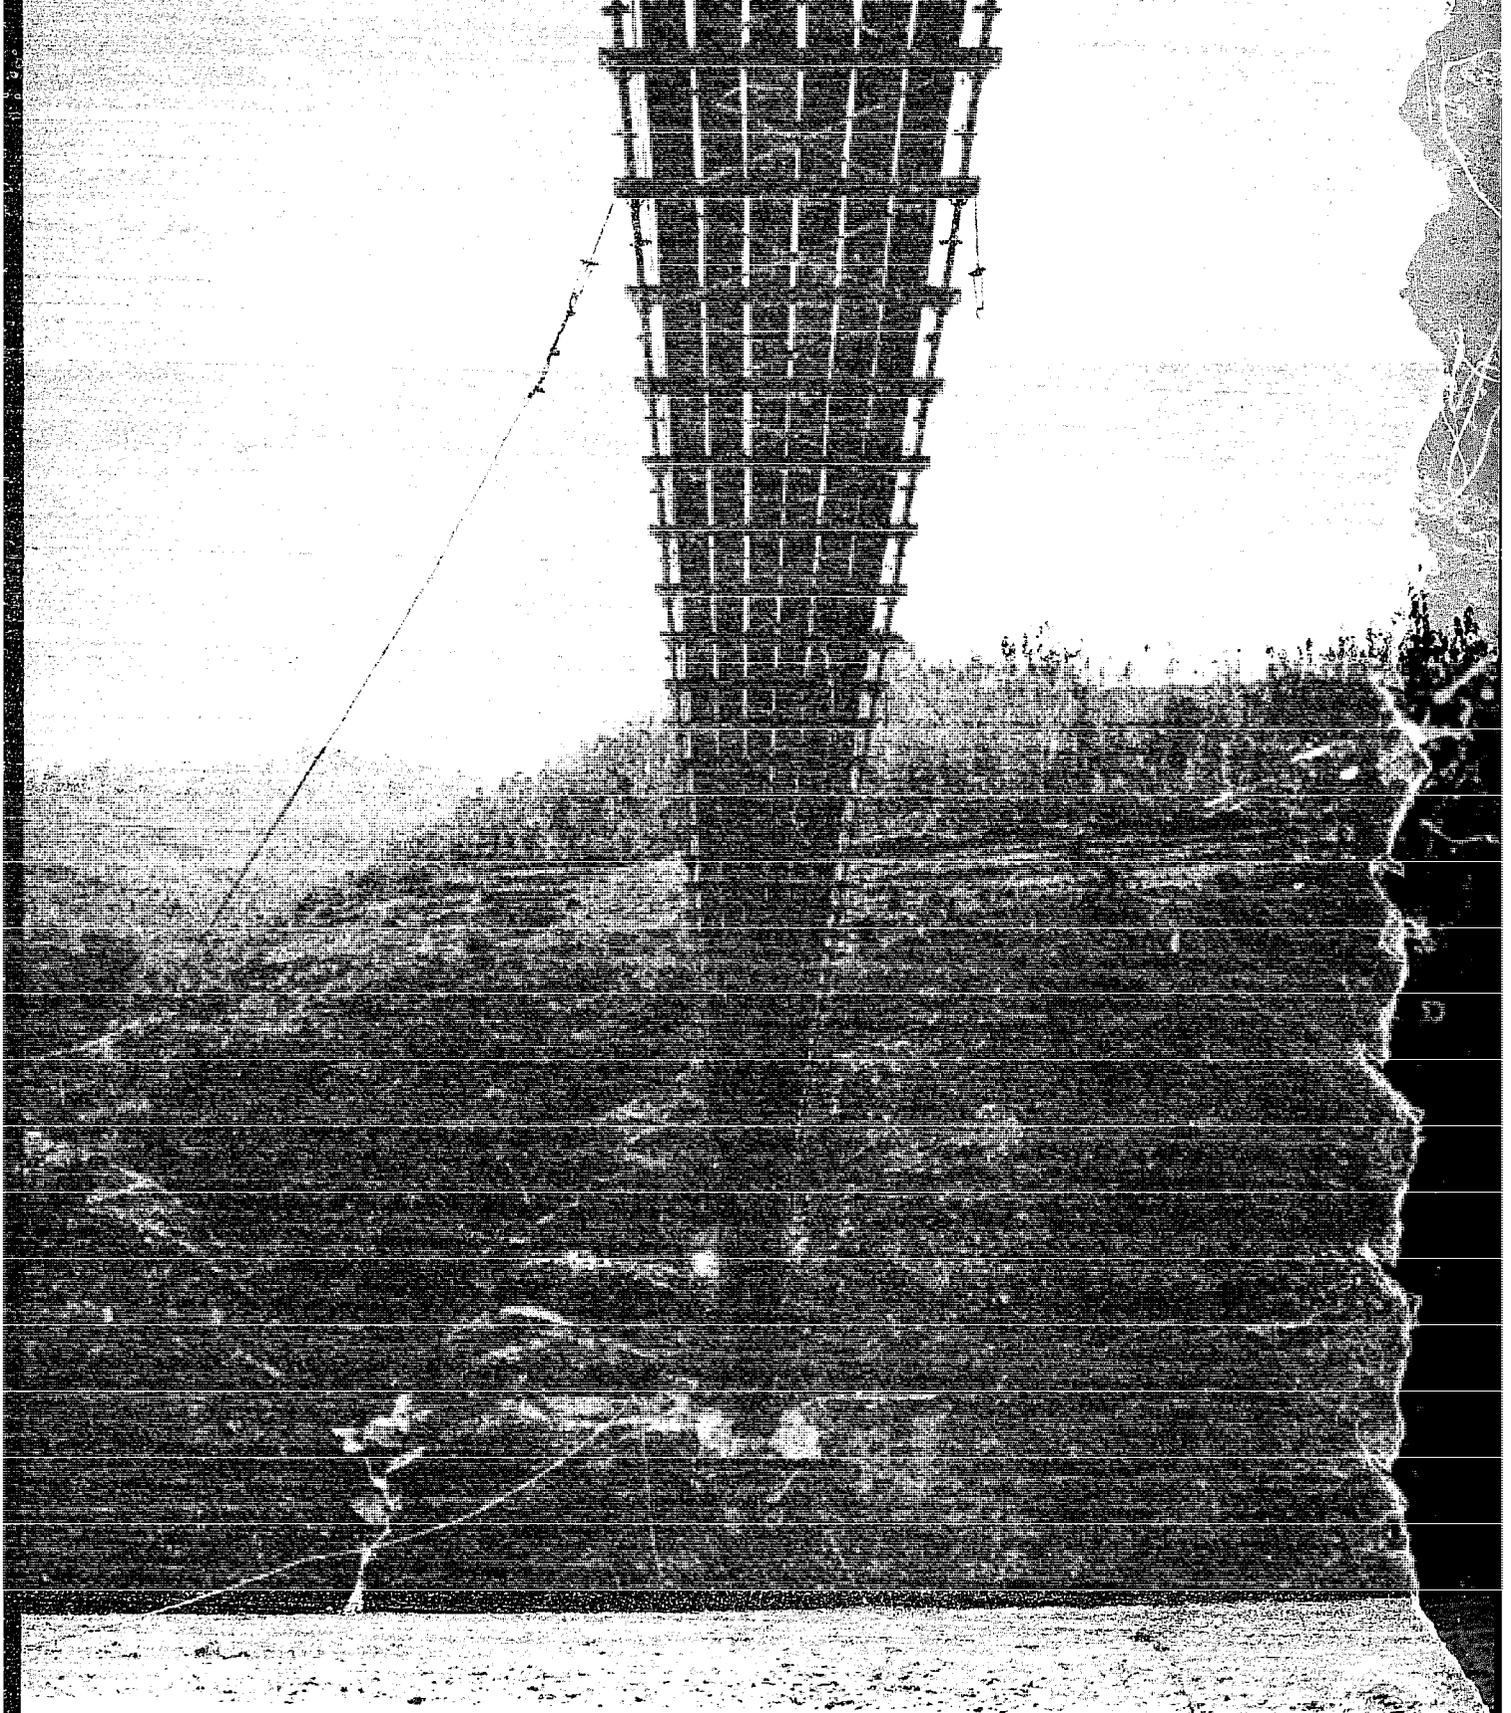

I. TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES






No. 1.101

GENERAL DESIGN. Variations depending on cross section and soil

Date: 30th Dec 76

Sig: *for Hob*

For further information and references please refer to the chapter 2. Bridge Design

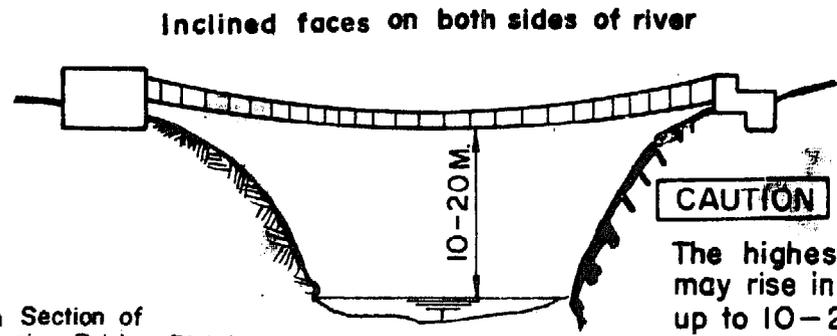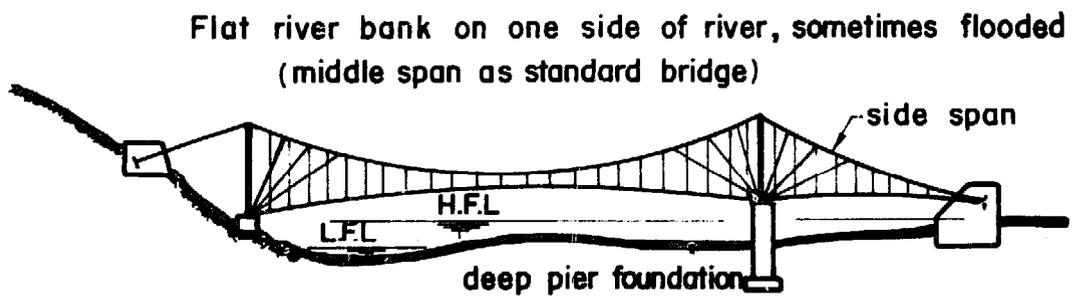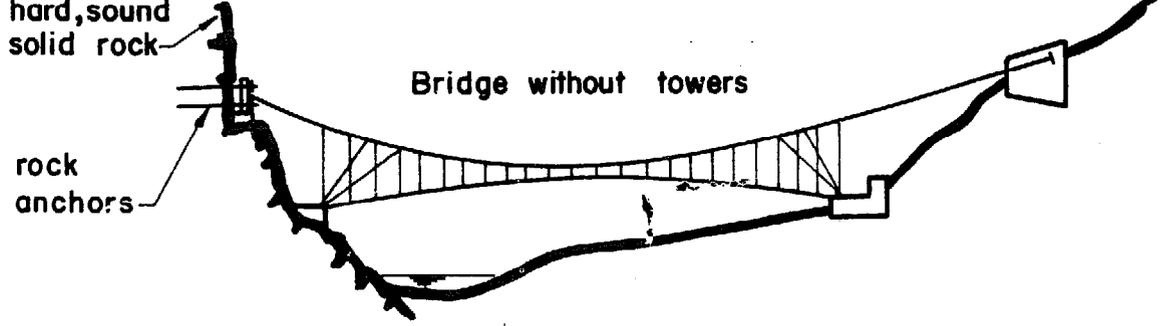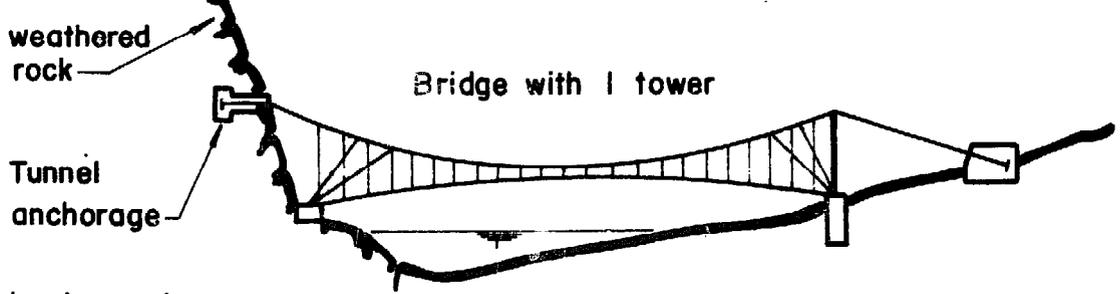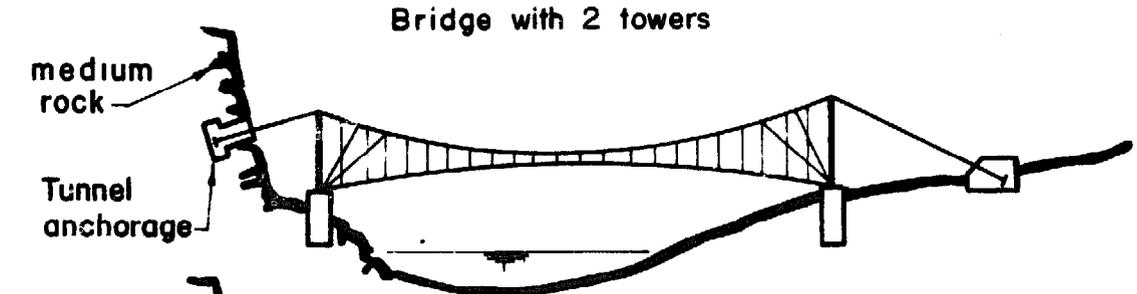

CAUTION
The highest water level may rise in a gorge up to 10-20M.

SOURCES: Design Section of Suspension Bridge Division.

SATA, Swiss Association for Technical Assistance

TYPES OF SUSPENSION OR SUSPENDED BRIDGES

General Design


(e.g. 512 Dhaunebagar Suspended Bridge of 87 m span)

No. : 1.102

Date : 13th Dec. 76

Sig : *[Signature]*

Noteworthy : The main anchor blocks are placed at different levels. This system is known as a inclined span. For the type of a suspension bridge with two pylons either a huge excavation or a high foundation would have been necessary on one river bank. This solution would be much costlier than the choice of a suspended Bridge without pylons.

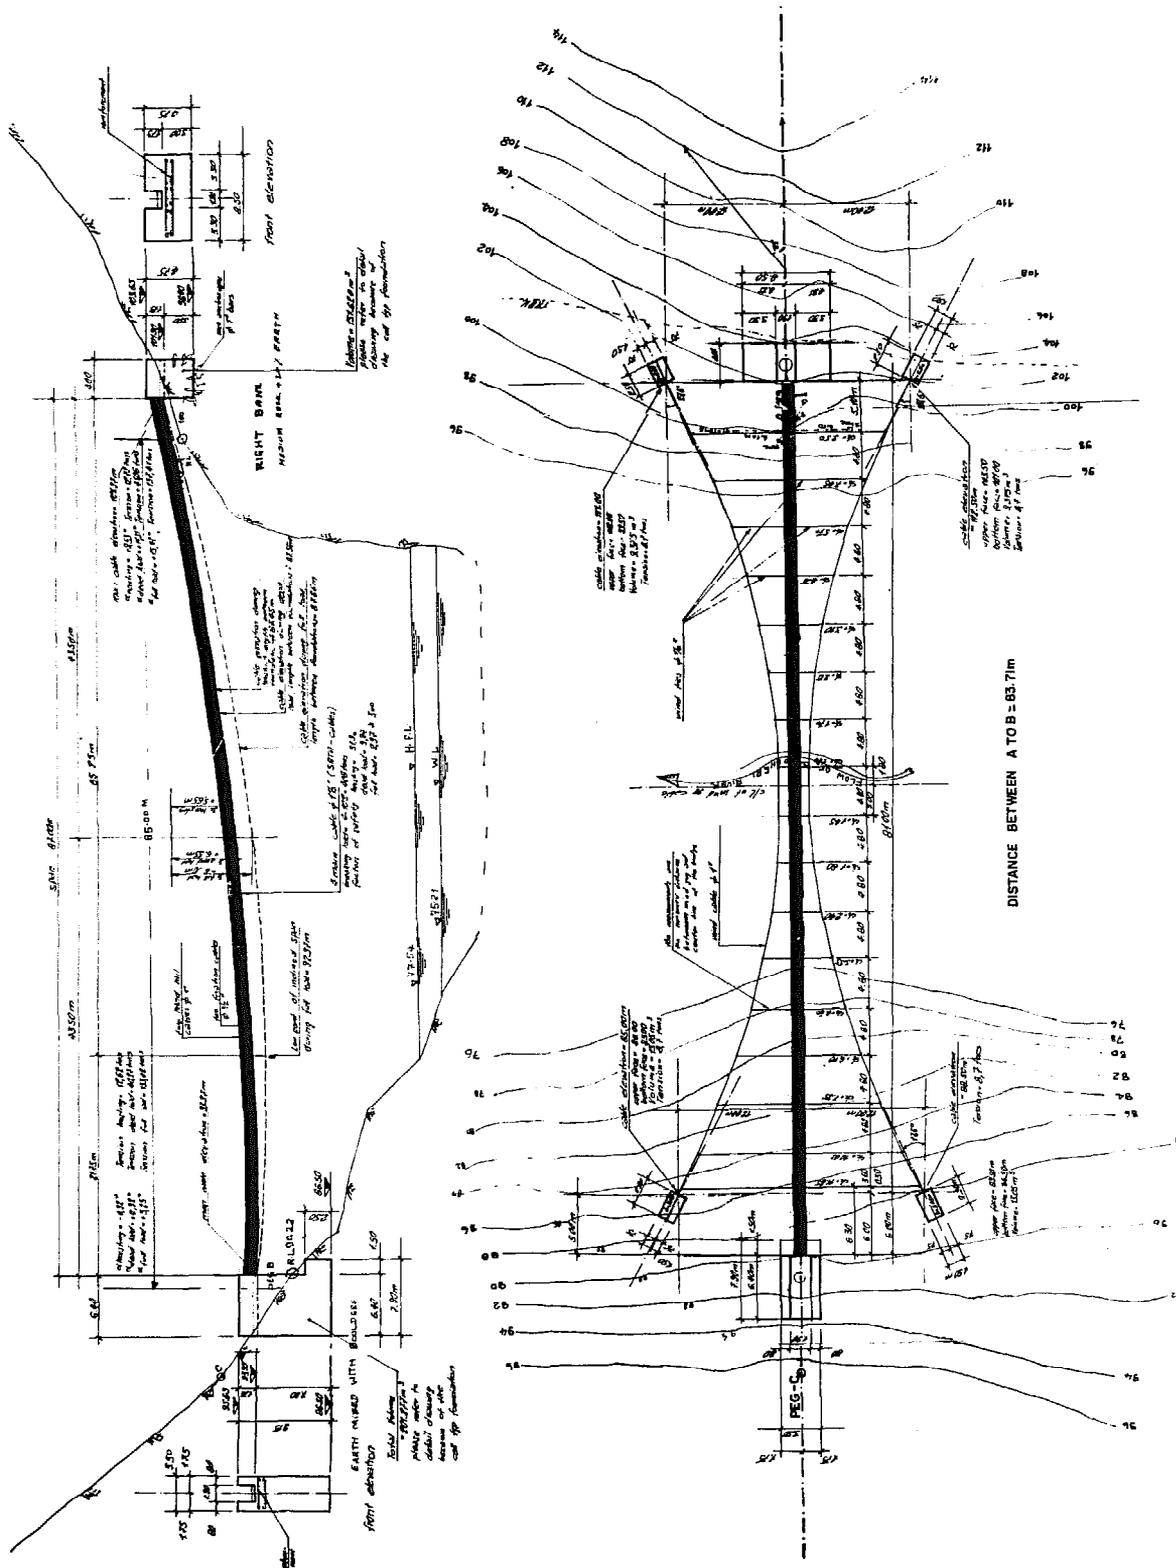

TYPES OF SUSPENSION OR SUSPENDED BRIDGES

General Design


(e.g. 512 Dhaunebagar Suspended Bridge of 87 m span)

No. : 1.102

Date : 13th Dec. 76

Sig : *[Signature]*

Noteworth : The main anchor blocks are placed at different levels. This system is known as a inclined span. For the type of a suspension bridge with two pylons either a huge excavation or a high foundation would have been necessary on one river bank. This solution would be much costlier than the choice of a suspended Bridge without pylons.

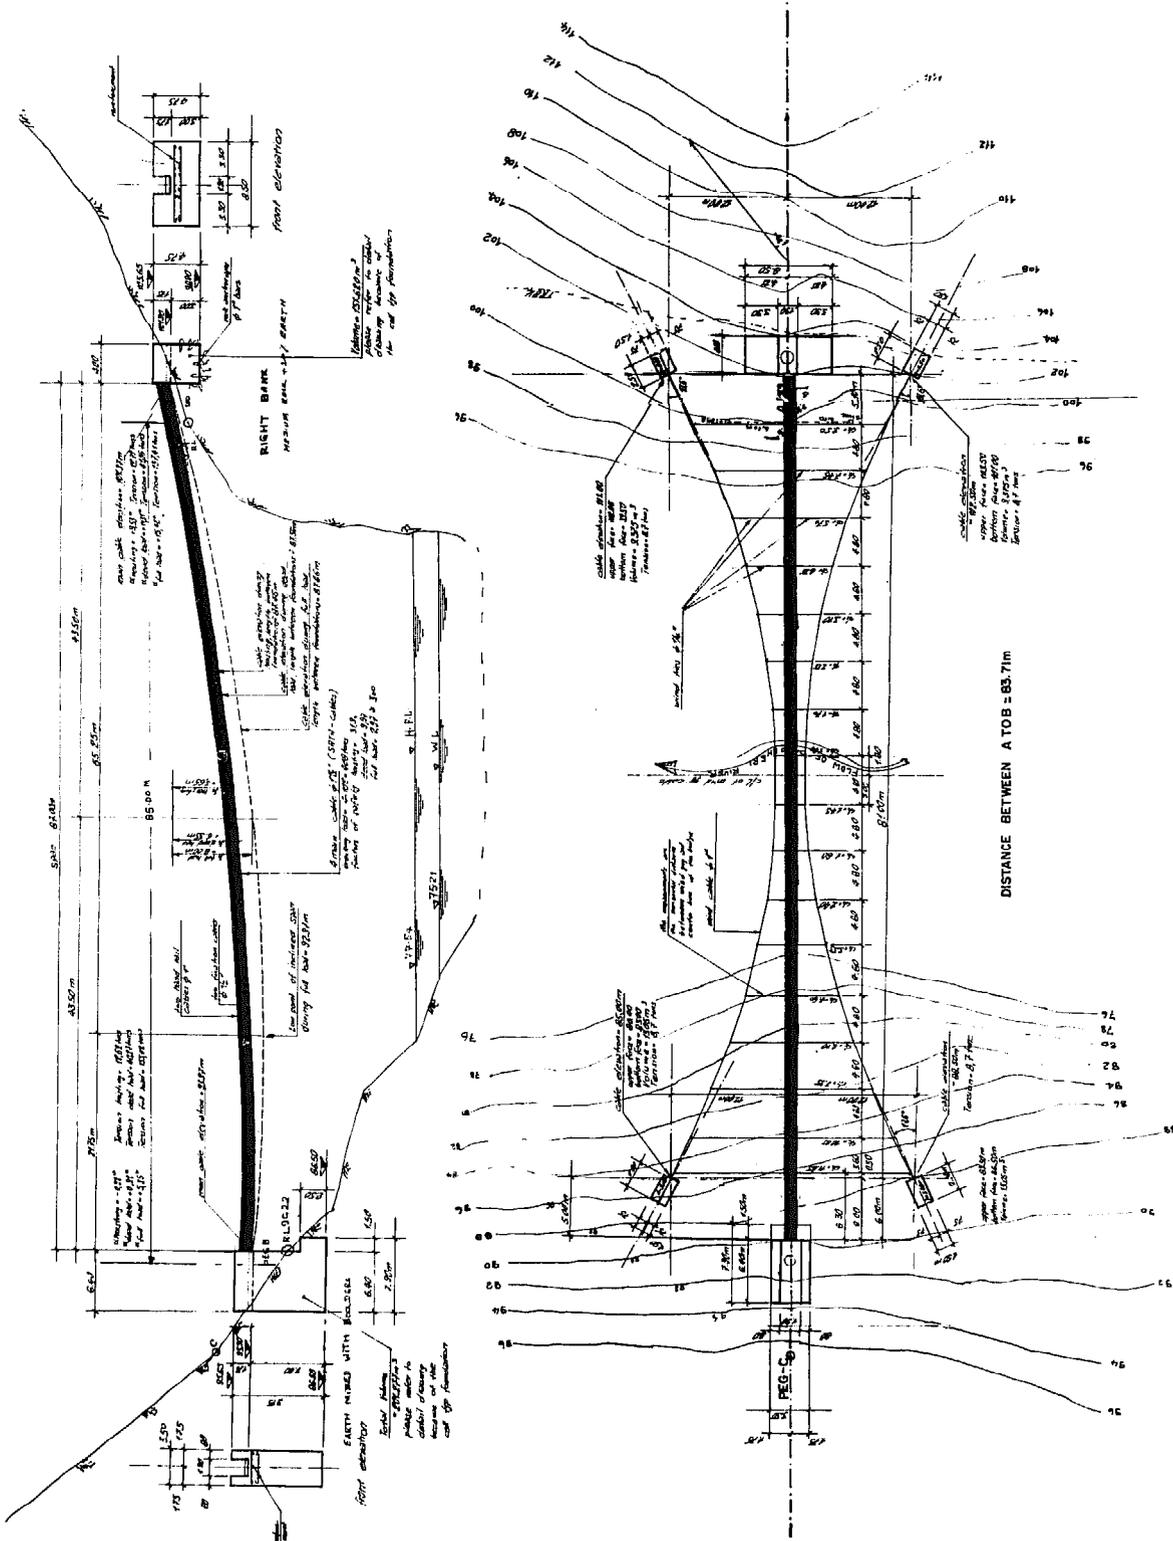

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

No. : 1.103

General Design


Date : 13th Dec. 76

(e.g. 507 Chacklight Bridge of 70 m Span with one Pylon)


Sig : *[Signature]*

Noteworth : It has been proved that this is only economical for short spans, as the pylons get to high, or a relatively high tensile force has to be anchored. It should and must be mentioned, that this type might only be chosen if the costs can be expected lower than the normal solution with two pylons.

PLAN

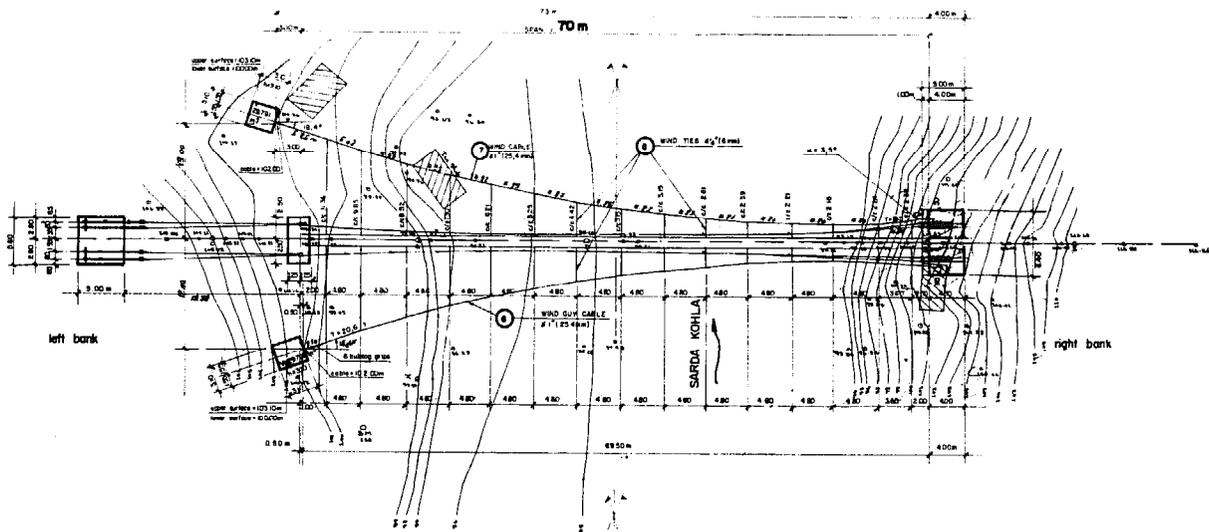

ELEVATION

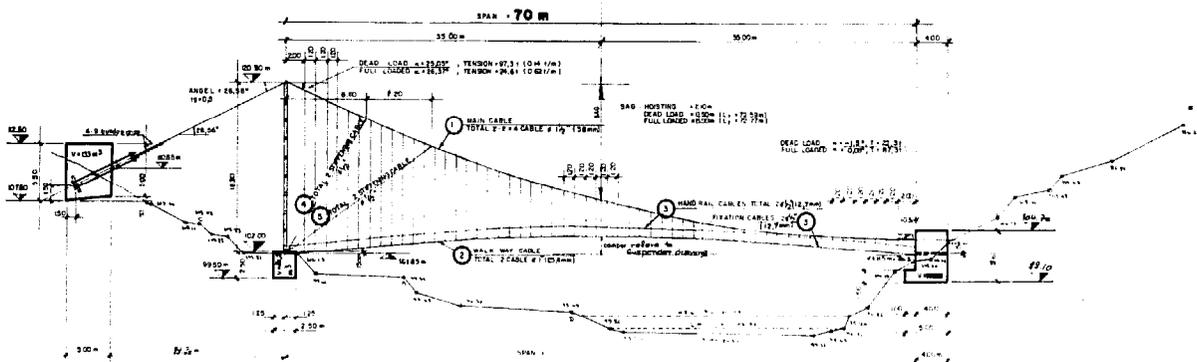

SATA, Swiss Association for Technical Assistance

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

No. : 1.105


General Design

Date : 13th. Dec. 76.

(e.g. 508 Kothe Bridge of 78 m span)

Sig : *for Plot*

Noteworth: The span is chosen with 78 m because the free board line with at least five (5) metres above the known high flood level has to be taken into account.

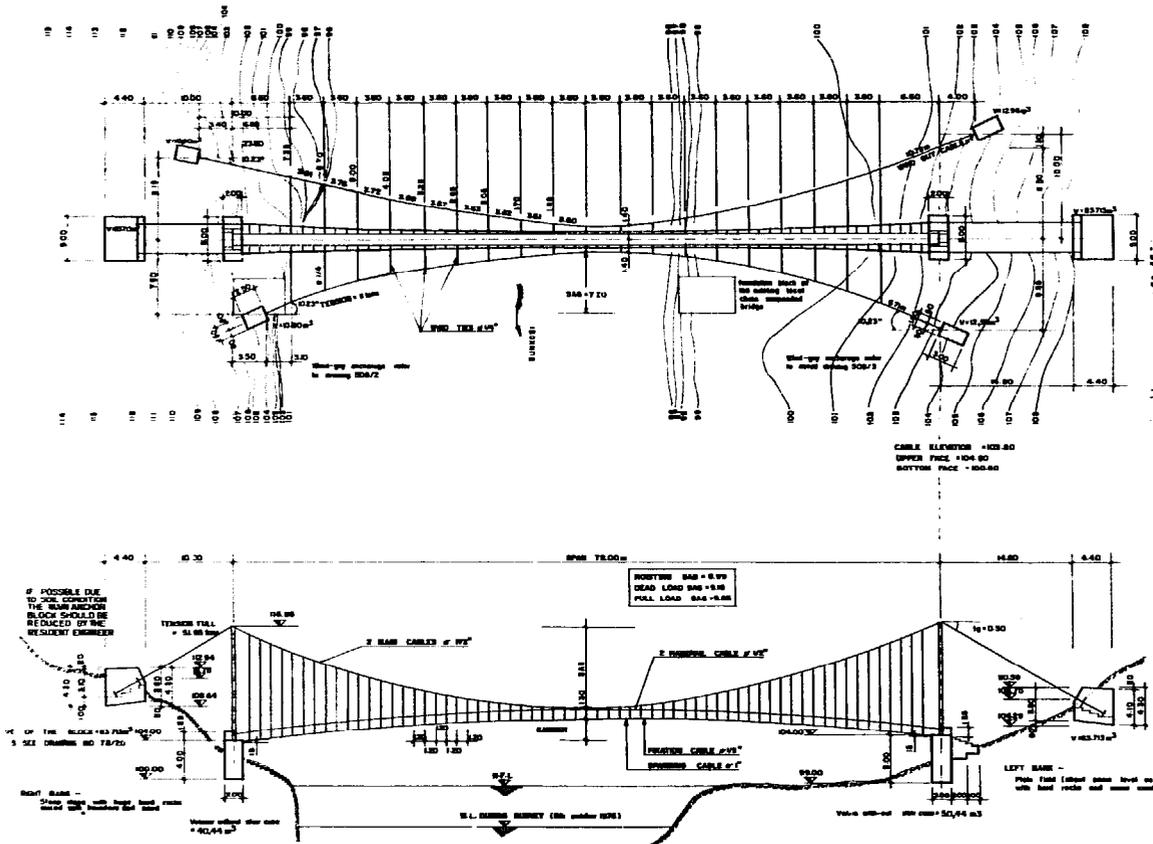

SAT A , Swiss Association for Technical Assistance

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

General Design


(e.g. 518 Maurasain Bridge of 60 m span)

No. : 1.106

Date : 13th Dec. 76

Sig : *for RBL*

Noteworth: On one side the hard sound rock is used as anchorage. The needed volume of about 48 m³ for the whole bridge makes the bridge cheap. For the main anchorage 1 : 3; 6 mass concrete, and for the wind guy anchorage on the left bank 1 : 2; 4 mass concrete is used.

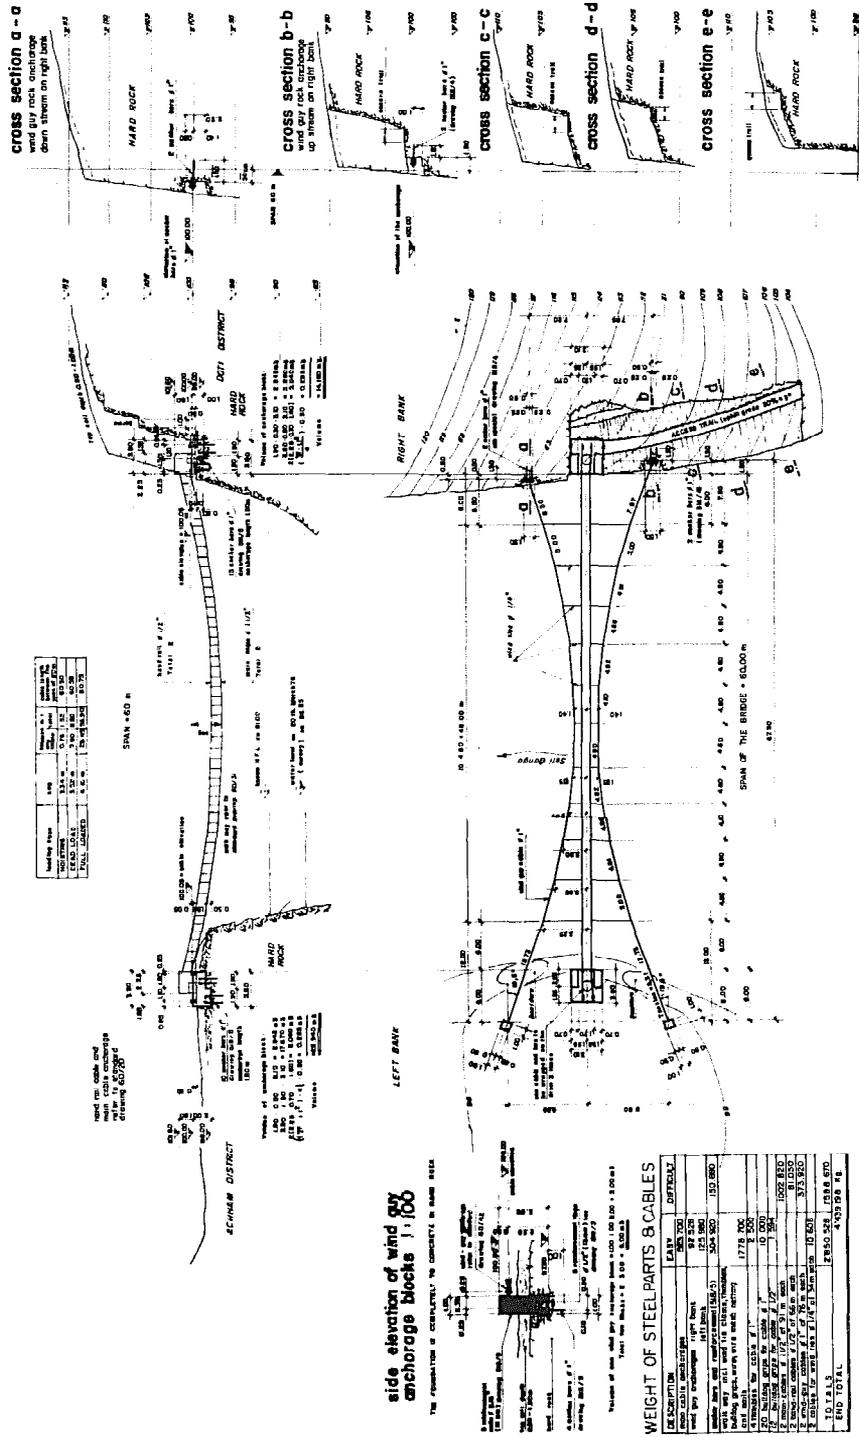

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

General Design


(e.g. 518 Maurasain Bridge of 60 m span)

No. : 1.106

Date : 13th Dec. 76

Sig : *for Hoth*

Noteworth: On one side the hard sound rock is used as anchorage. The needed volume of about 49 m³ for the whole bridge makes the bridge cheap. For the main anchorage 1 : 3; 6 mass concrete, and for the wind guy anchorage on the left bank 1 : 2; 4 mass concrete is used.

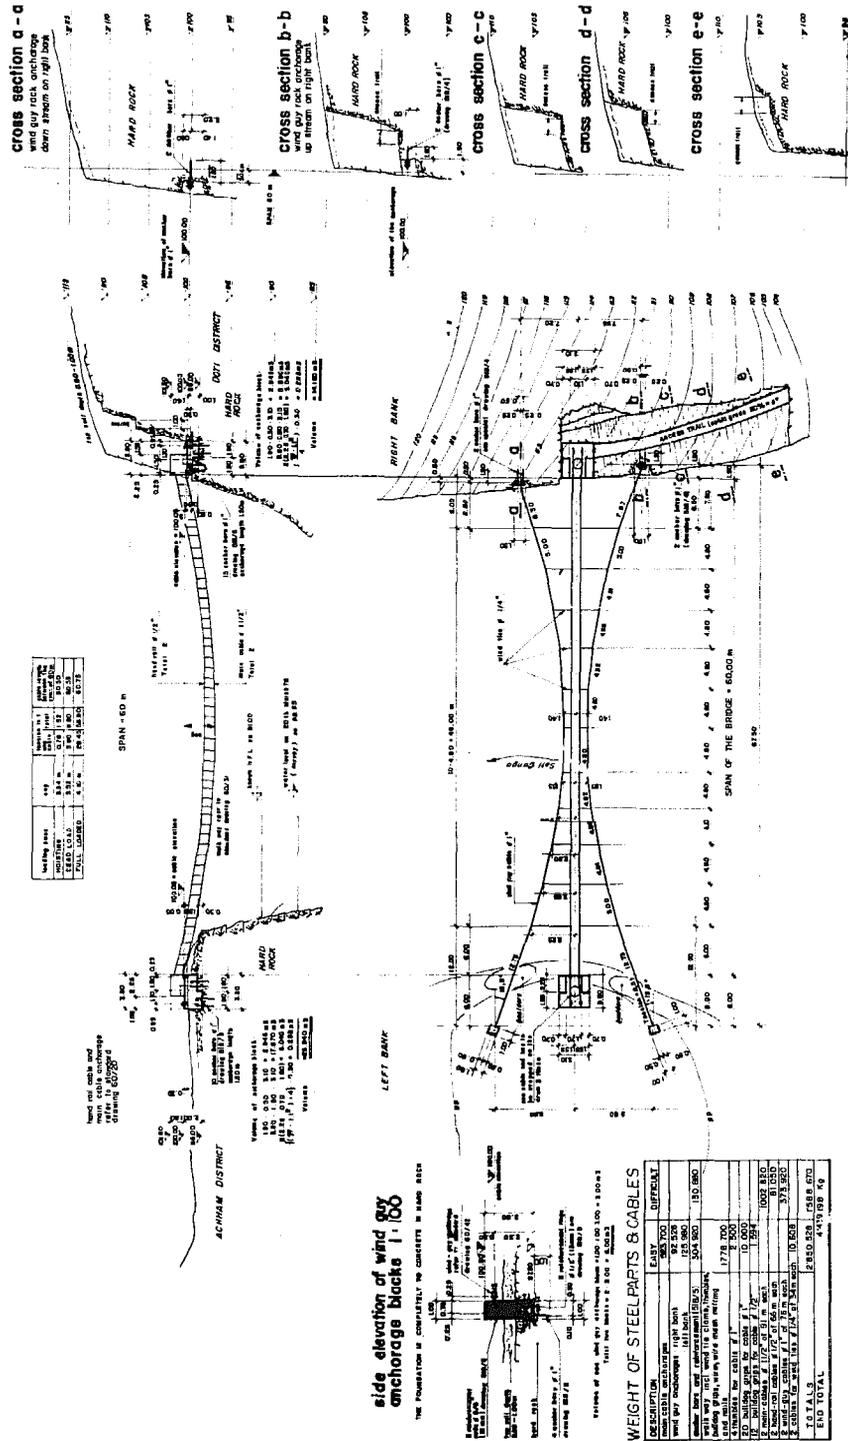

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

General Design


(e.g. 506 Jauljibi Suspension Bridge of 114 m Span)

No. : 1.107

Date : 13th Dec. 76

Sig : *[Signature]*

Noteworth : On the left river bank the back stay cables are nearly horizontal. The pylon is a hinge type, i.e. no different in the horizontal force can be kept by the tower. To withstand the propensity to turn buck of the pylon a special clamp at the saddle has to be used. These clamps (on each saddle one) should be calculated by using a factor of sliding of 0.1 and a factor of safety with 1.5 .

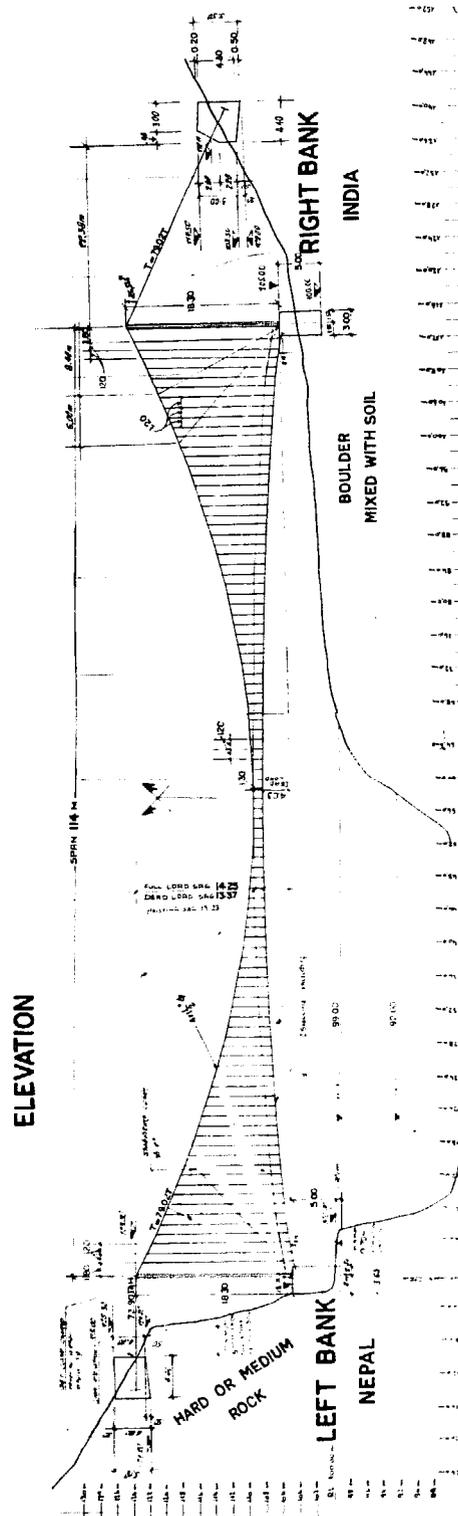

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

General Design


(e.g. 506 Jauljibi Suspension Bridge of 114 m Span)

No. : 1.107

Date : 13th Dec. 76

Sig : *[Signature]*

Noteworth : On the left river bank the back stay cables are nearly horizontal. The pylon is a hinge type, i.e. no different in the horizontal force can be kept by the tower. To withstand the propensity to turn buck of the pylon a special clamp at the saddle has to be used. These clamps (on each saddle one) should be calculated by using a factor of sliding of 0.1 and a factor of safety with 1.5 .

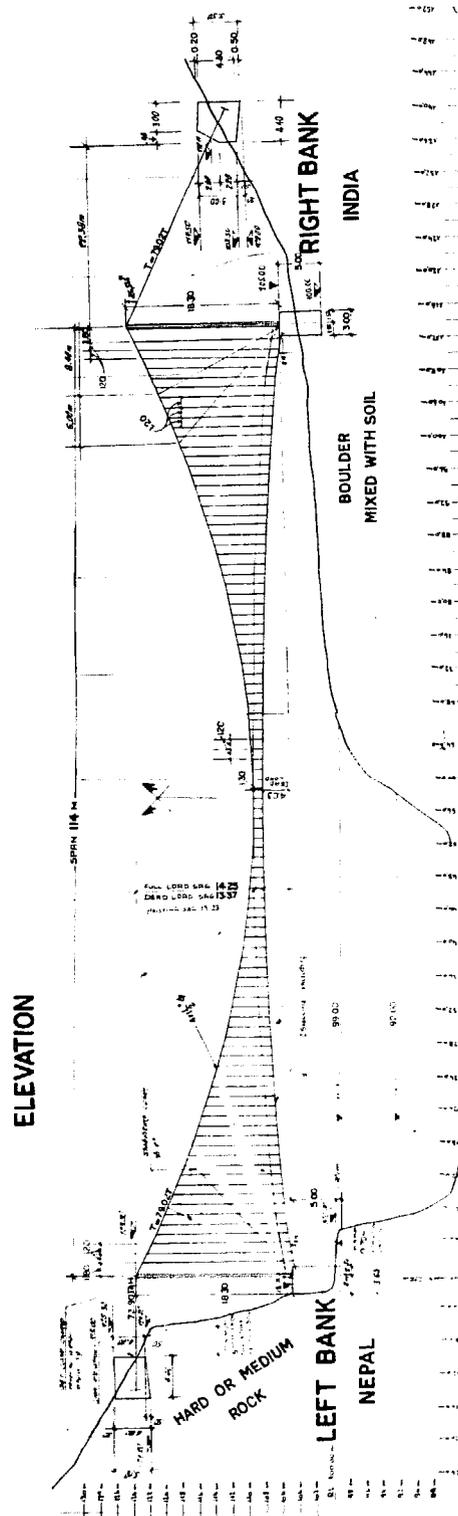

S A T A , Swiss Association for Technical Assistance


HMG Nepal

Roads Department

Suspension Bridge Division

H. Phol

SAT A, Swiss Association for Technical Assistance

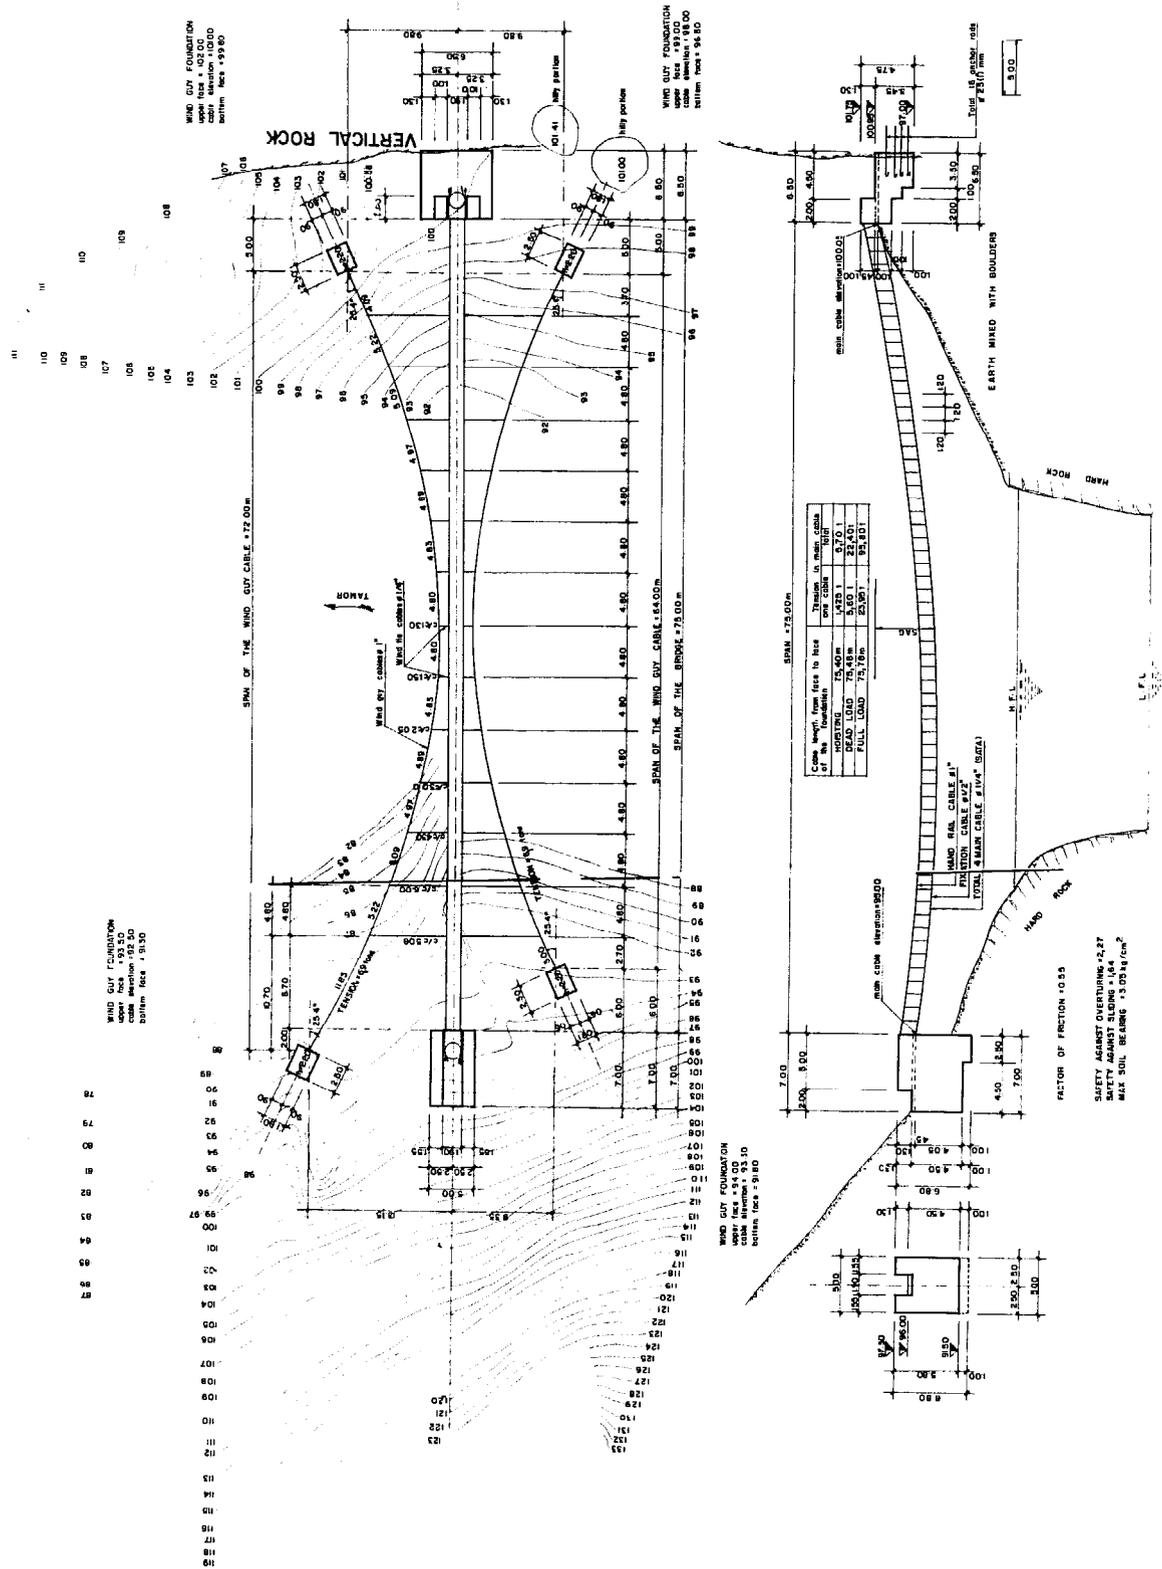


TYPES OF TRAIL SUSPENSION BRIDGES

General Design


(e.g. 522 Purchudi Hat Suspended Bridge of 48 m Span)

1.110
1st March 77

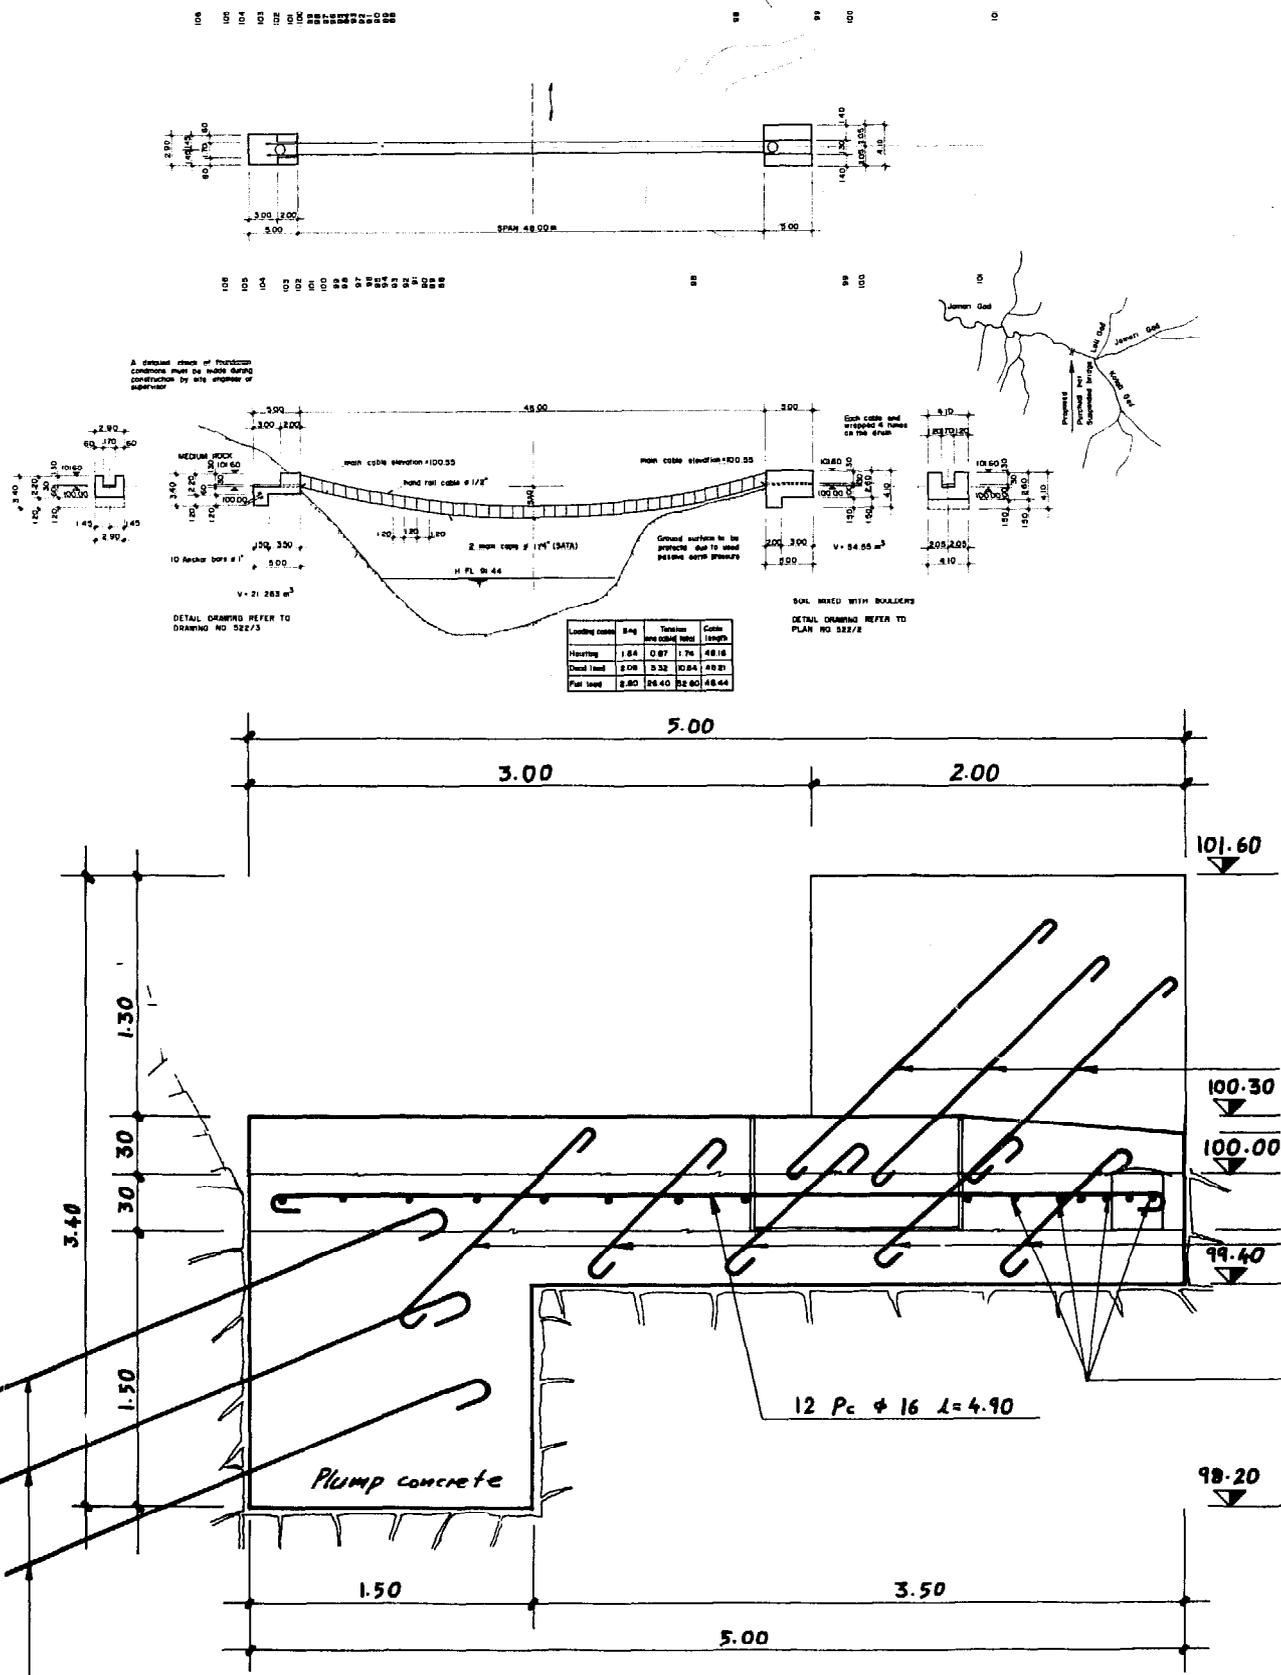

SAT A , Swiss Association for Technical Assistance


Handwritten signature

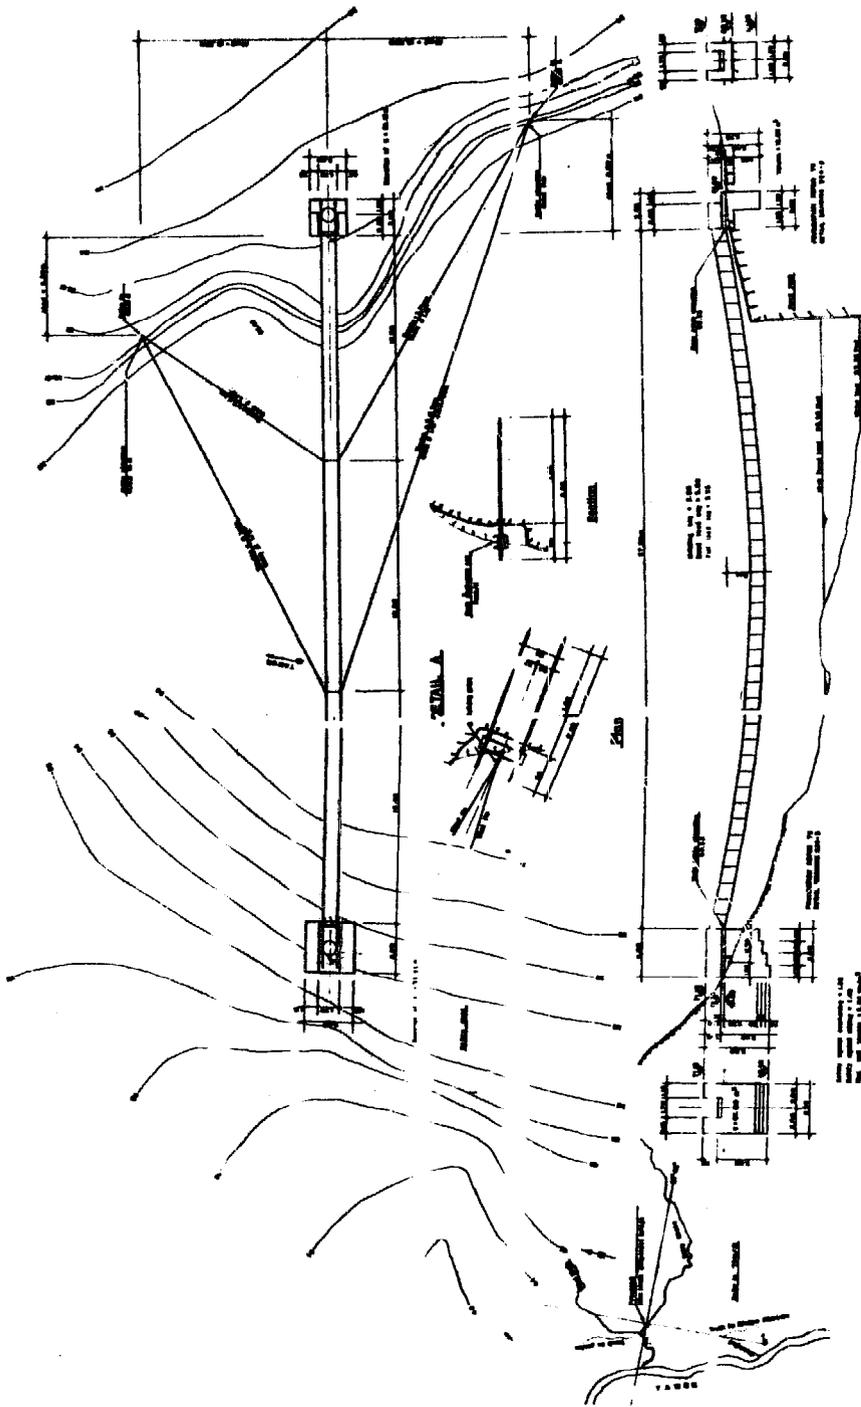

SAT A , Swiss Association for Technical Assistance

The

SAT A, Swiss Association for Technical Assistance

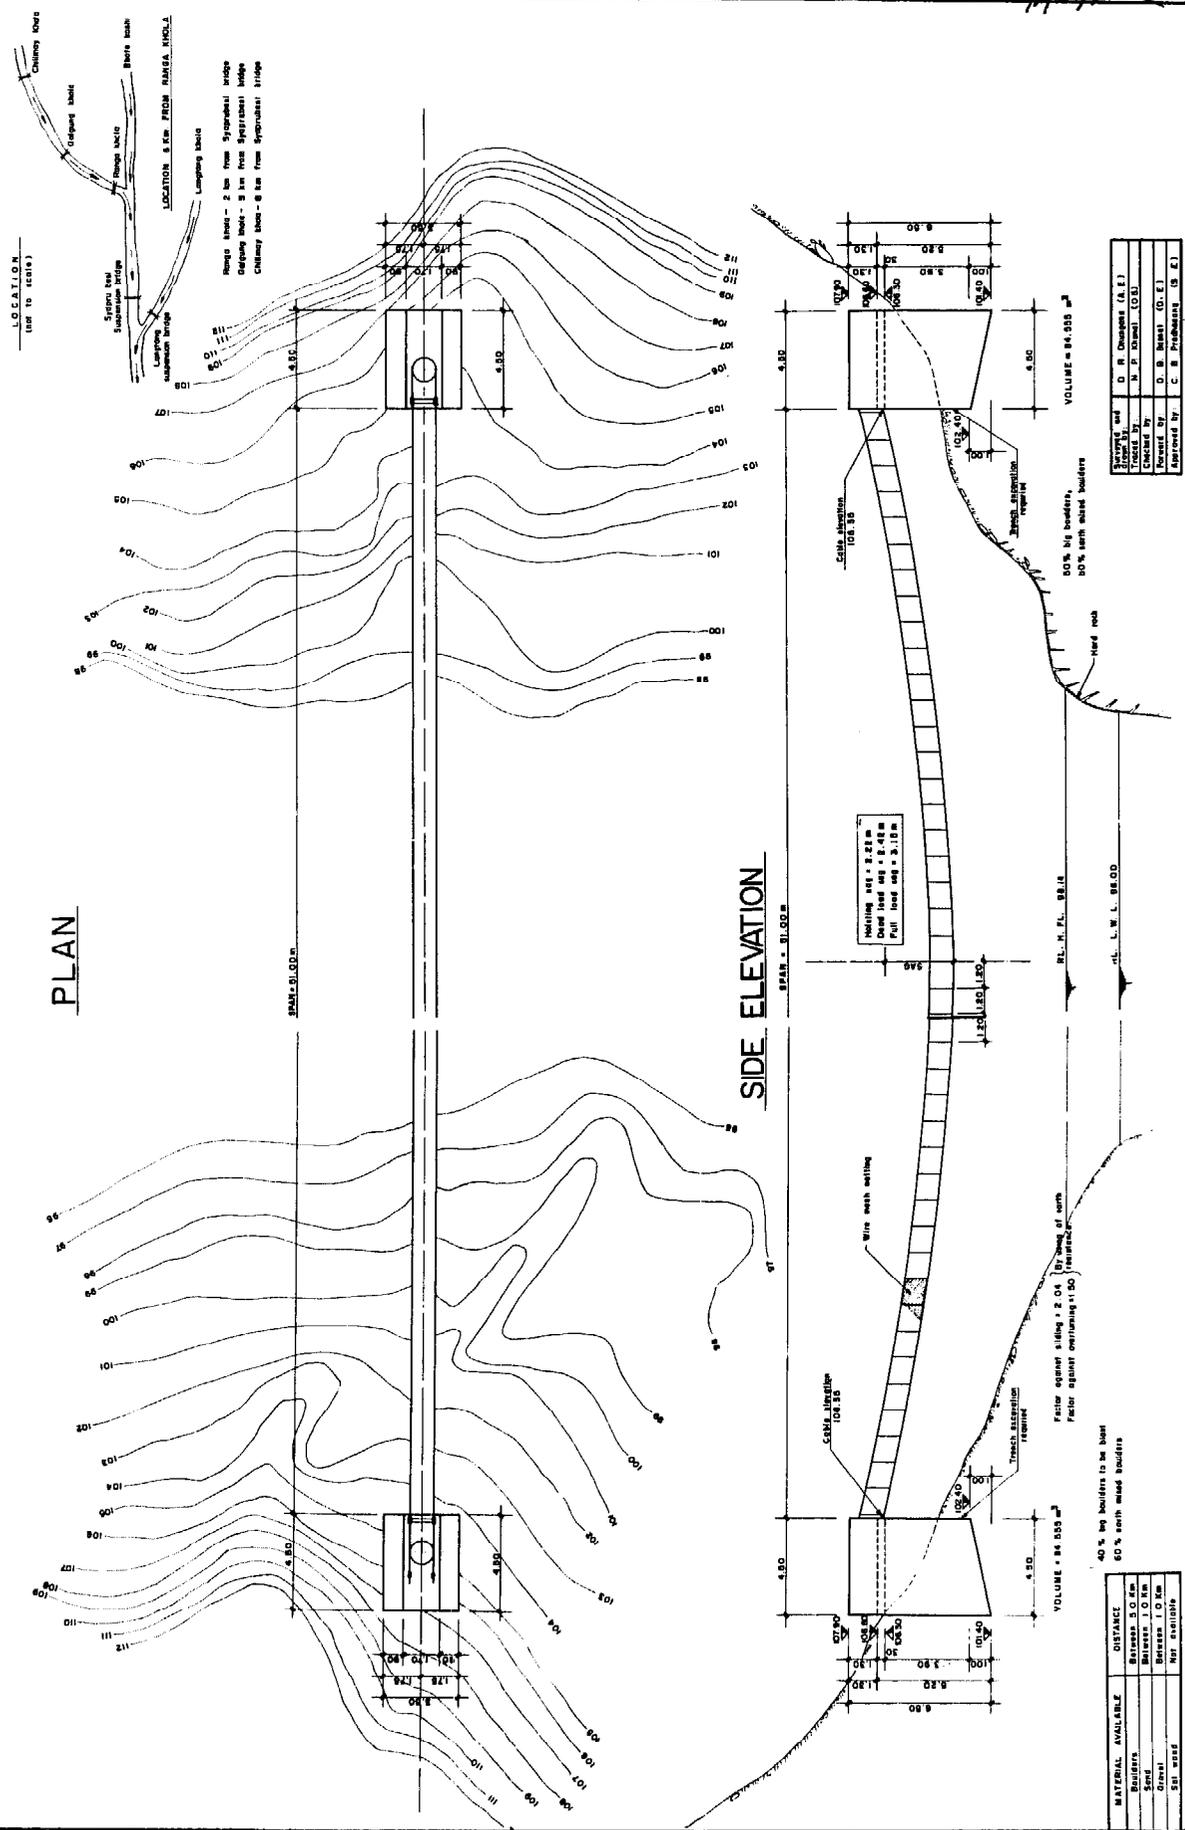

HMG Nepal

Roads Department

Suspension Bridge Division

Checked by	D. B. Bhatt (G. E.)
Approved by	C. B. Prasadani (S. E.)
Drawn by	D. B. Bhatt (G. E.)
Checked by	N. P. Dhawal (G. E.)
Checked by	O. R. Deshpande (A. E.)

MATERIAL AVAILABLE	DISTANCE
Steel	50 km
Concrete	10 km
Gravel	10 km
SI	NOT AVAILABLE

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

General Design


(e.g. 511 Golgung Khola Suspended Bridge of 45 m Span)

1.113

1st March 77

R.H.

S A T A , Swiss Association for Technical Assistance

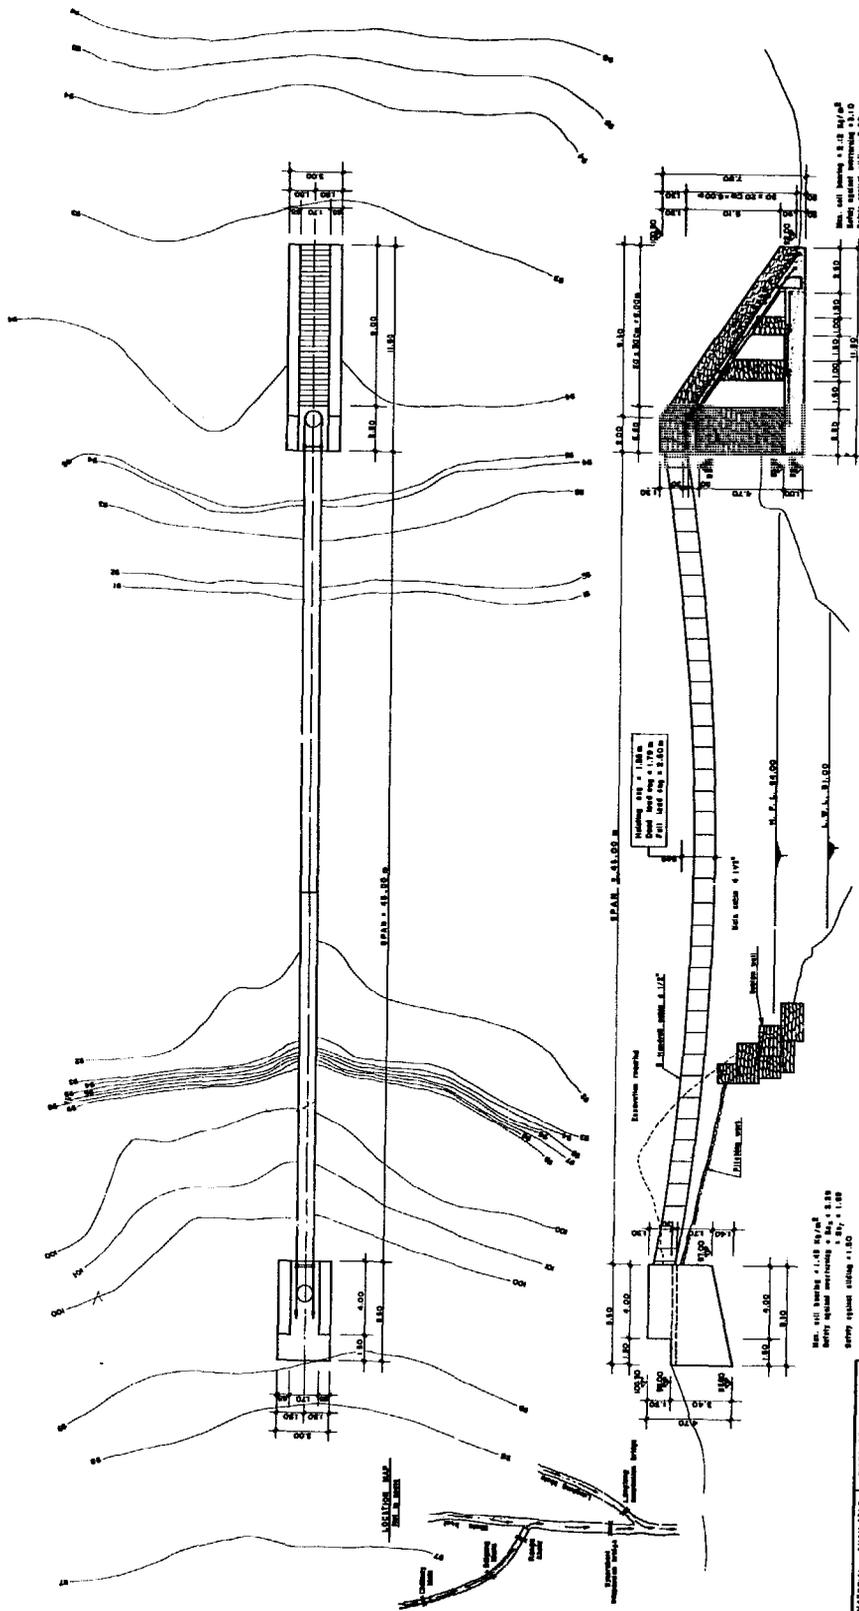

TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

General Design


(e.g. 513 Sukadhik Bouldik Suspended Bridge of 84 m Span)

1.114

1st March 77


[Handwritten signature]

SAT A, Swiss Association for Technical Assistance

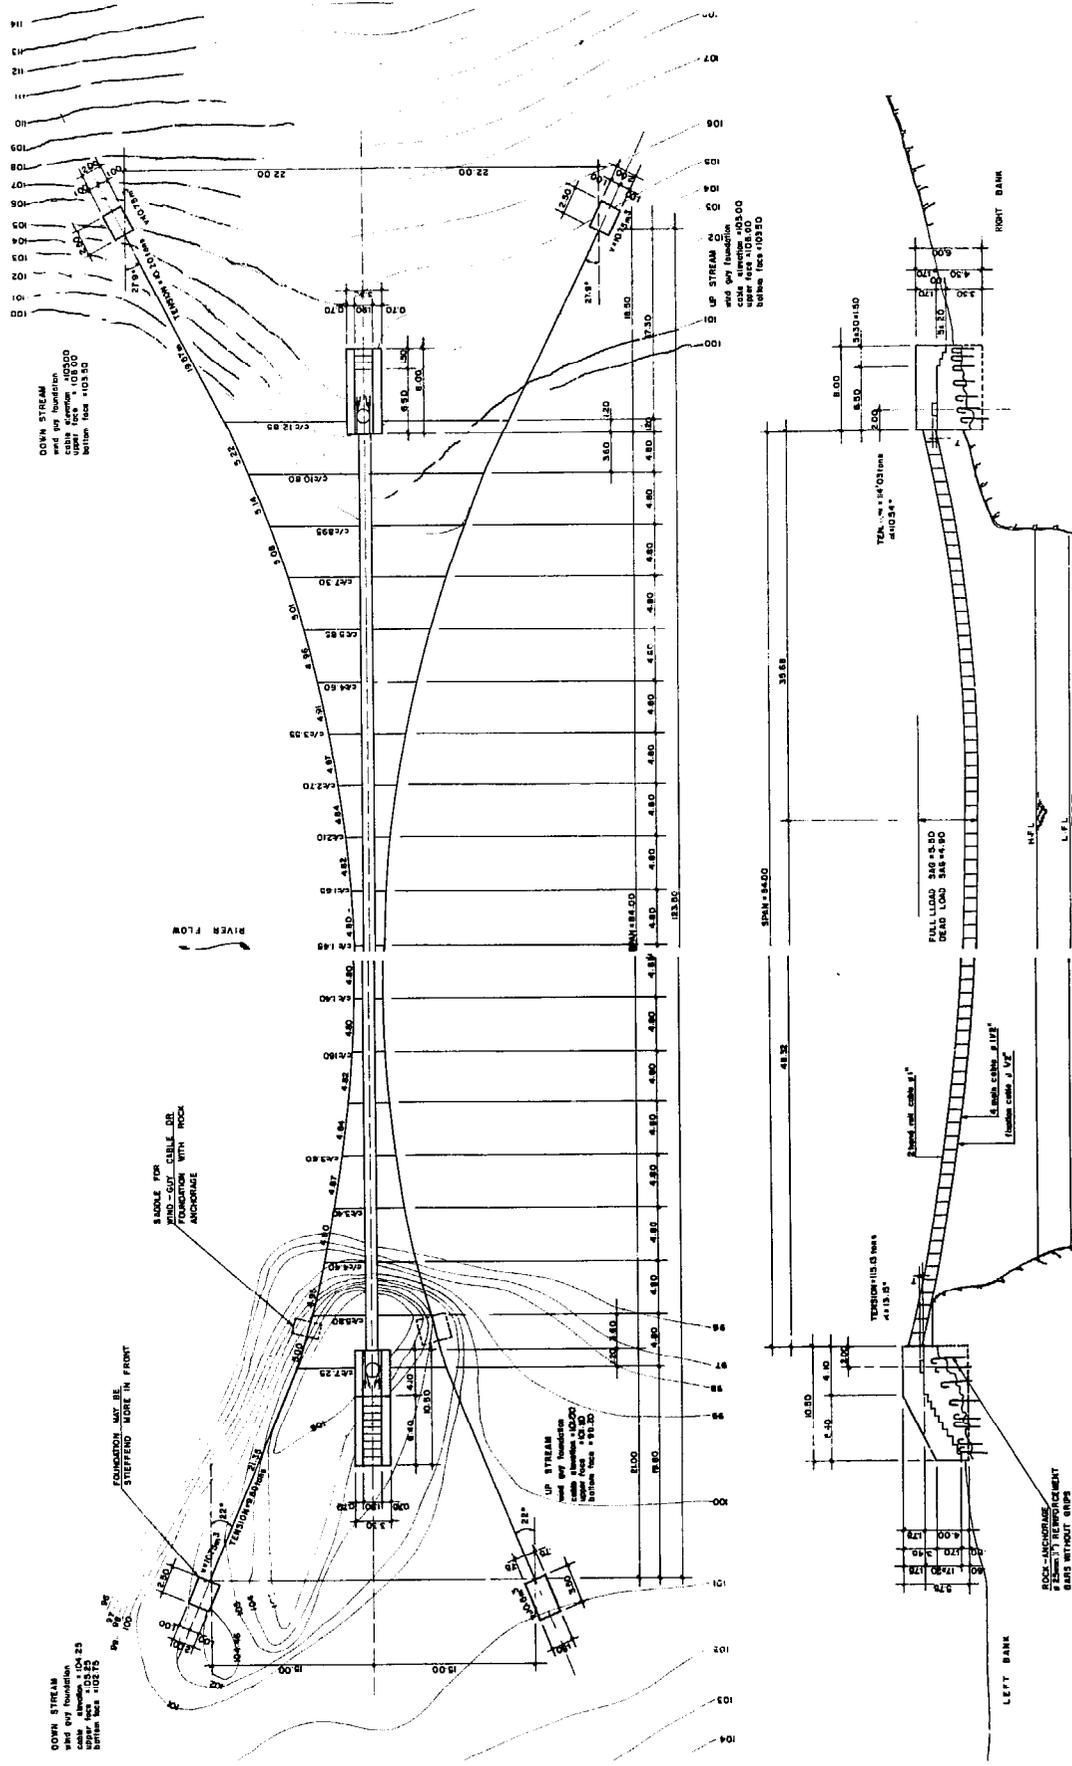

H. P. H.

SAT A , Swiss Association for Technical Assistance

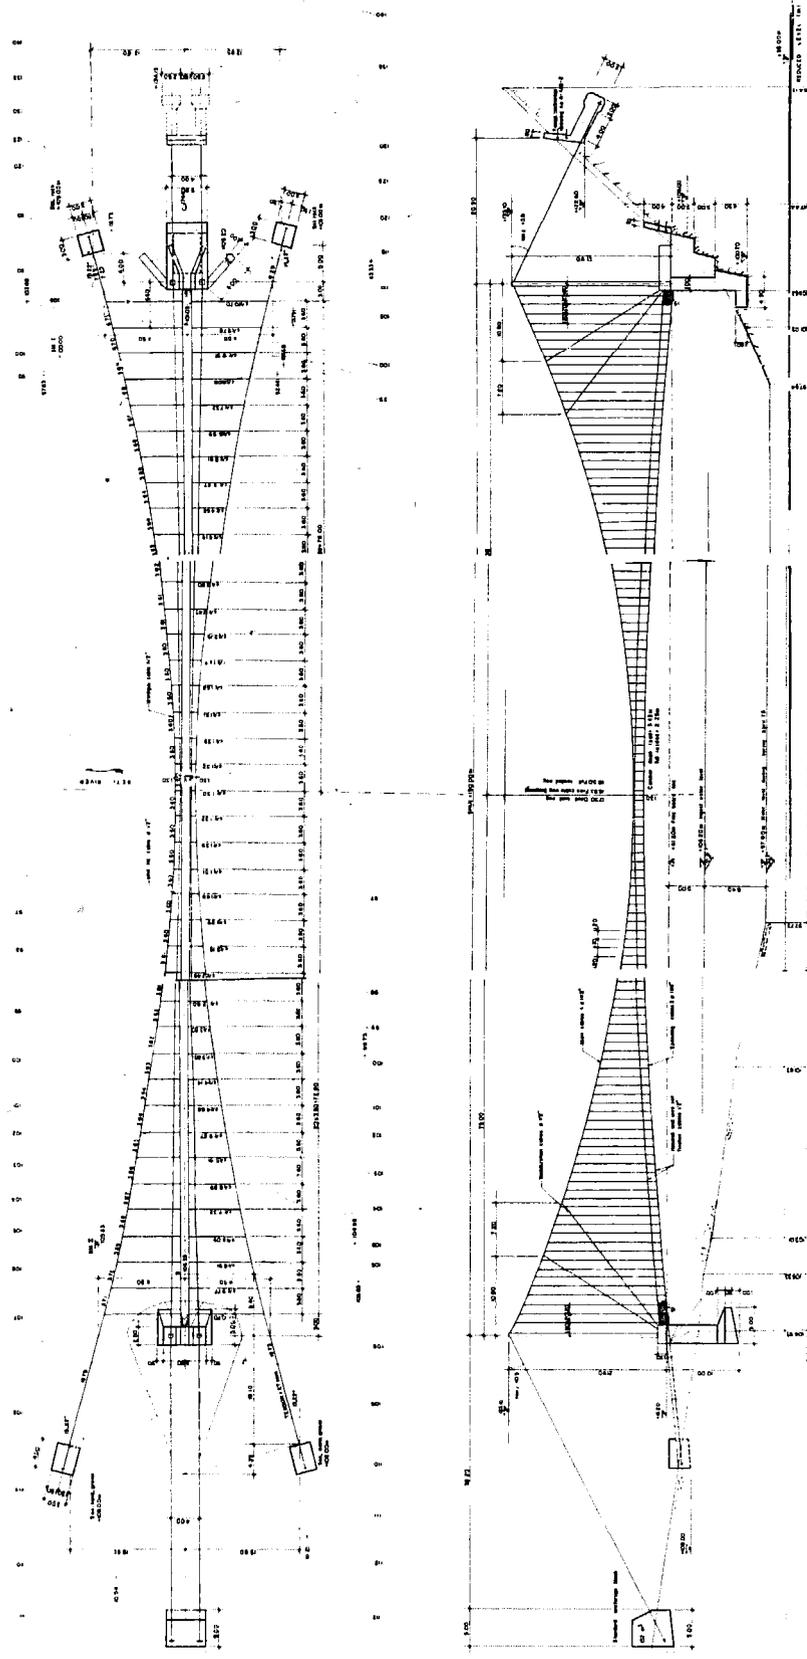

TYPES OF SUSPENSION OR SUSPENDED BRIDGES

General Design

(e.g. 525 Pikuwa Khola Suspension Bridge of 174 m span)


1.116

13th March 77

Handwritten signature


SATA, Swiss Association for Technical Assistance

SIDE ELEVATION:
SPAN 174.00m

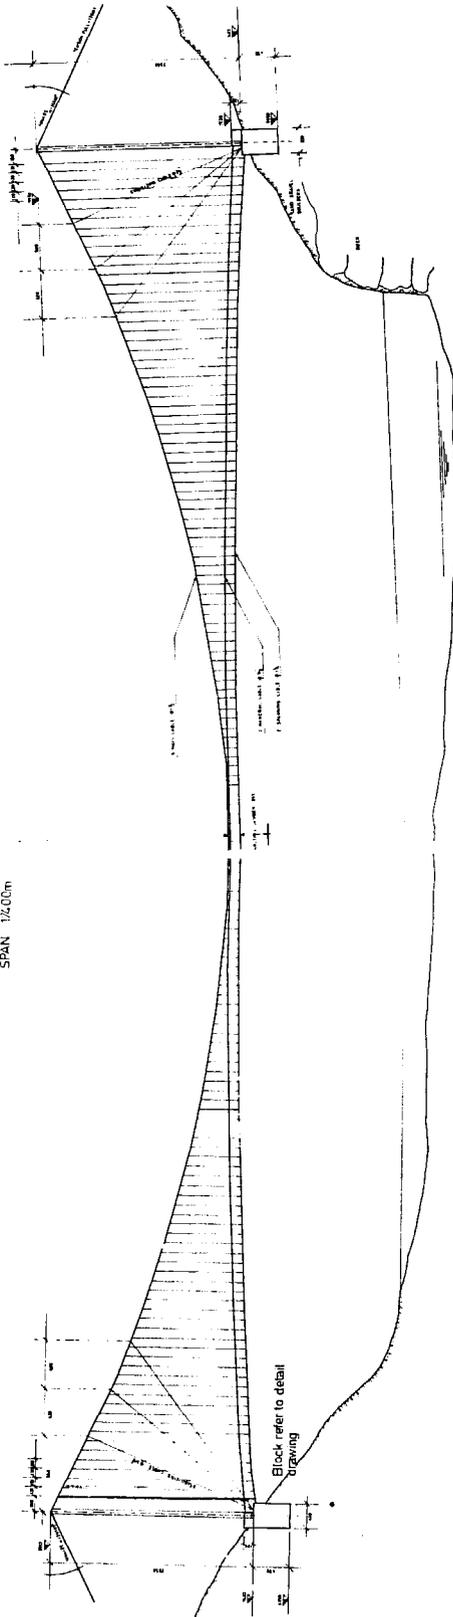



PLAN

Section of wind guy anchorage

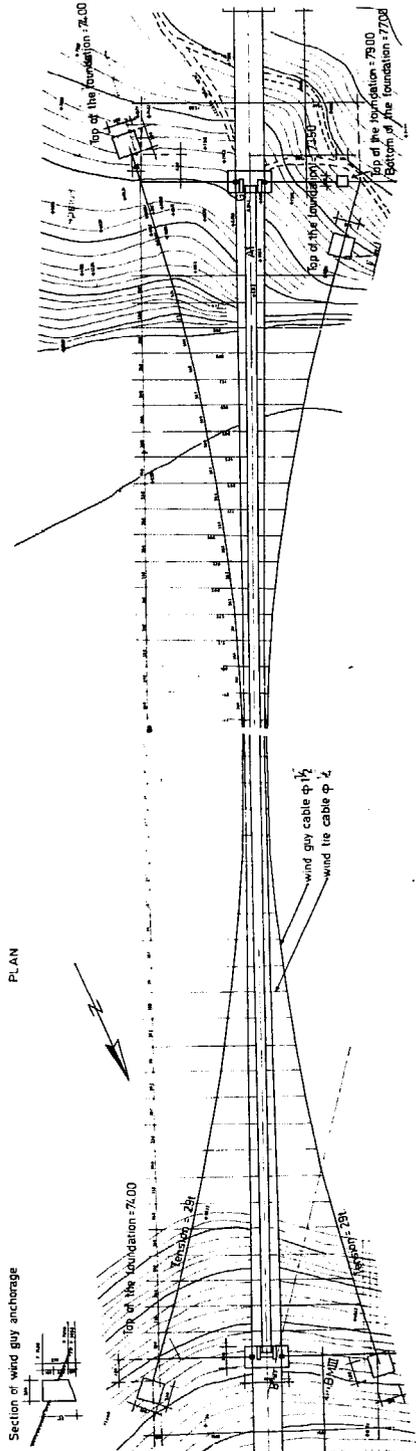


[Handwritten signature]

S A T A , Swiss Association for Technical Assistance

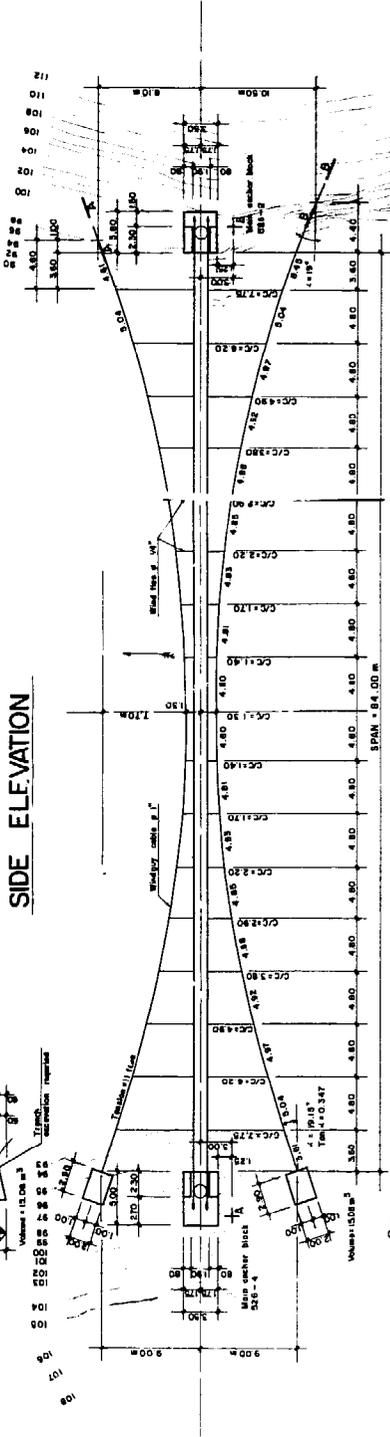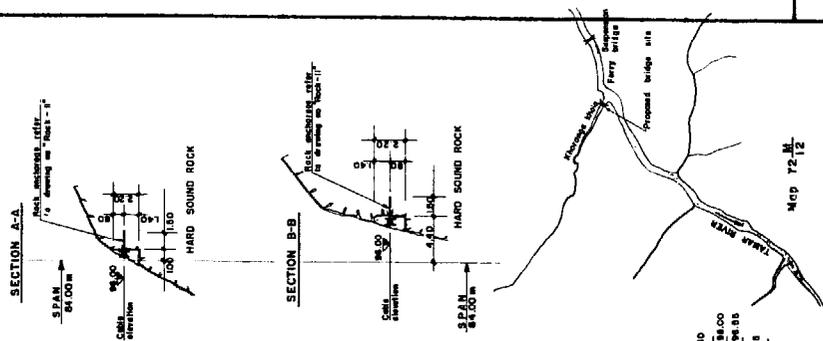


Item	Quantity	Unit	Remarks
Landing cable	3.70	m	1.05
Spanning cable	3.70	m	1.05
Deck beam	5.30	m	1.05
Full load	4.85	m	1.05

PLAN

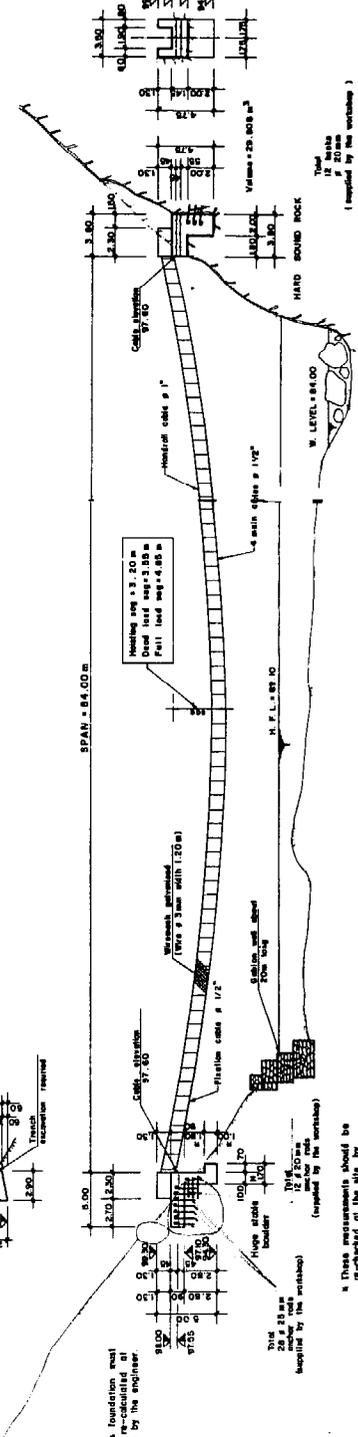

The foundation and
the structure shall
be executed in
accordance with
the design.

These measurements should be
re-checked at the site by
the resident engineer.

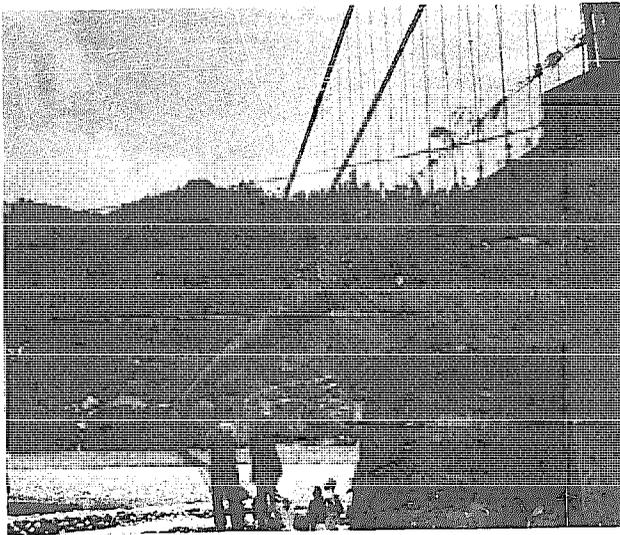

S A T A , Swiss Association for Technical Assistance



TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

No : 1.202



Suspension Bridges

Date : 23rd Febr. 77

Sig : *[Signature]*

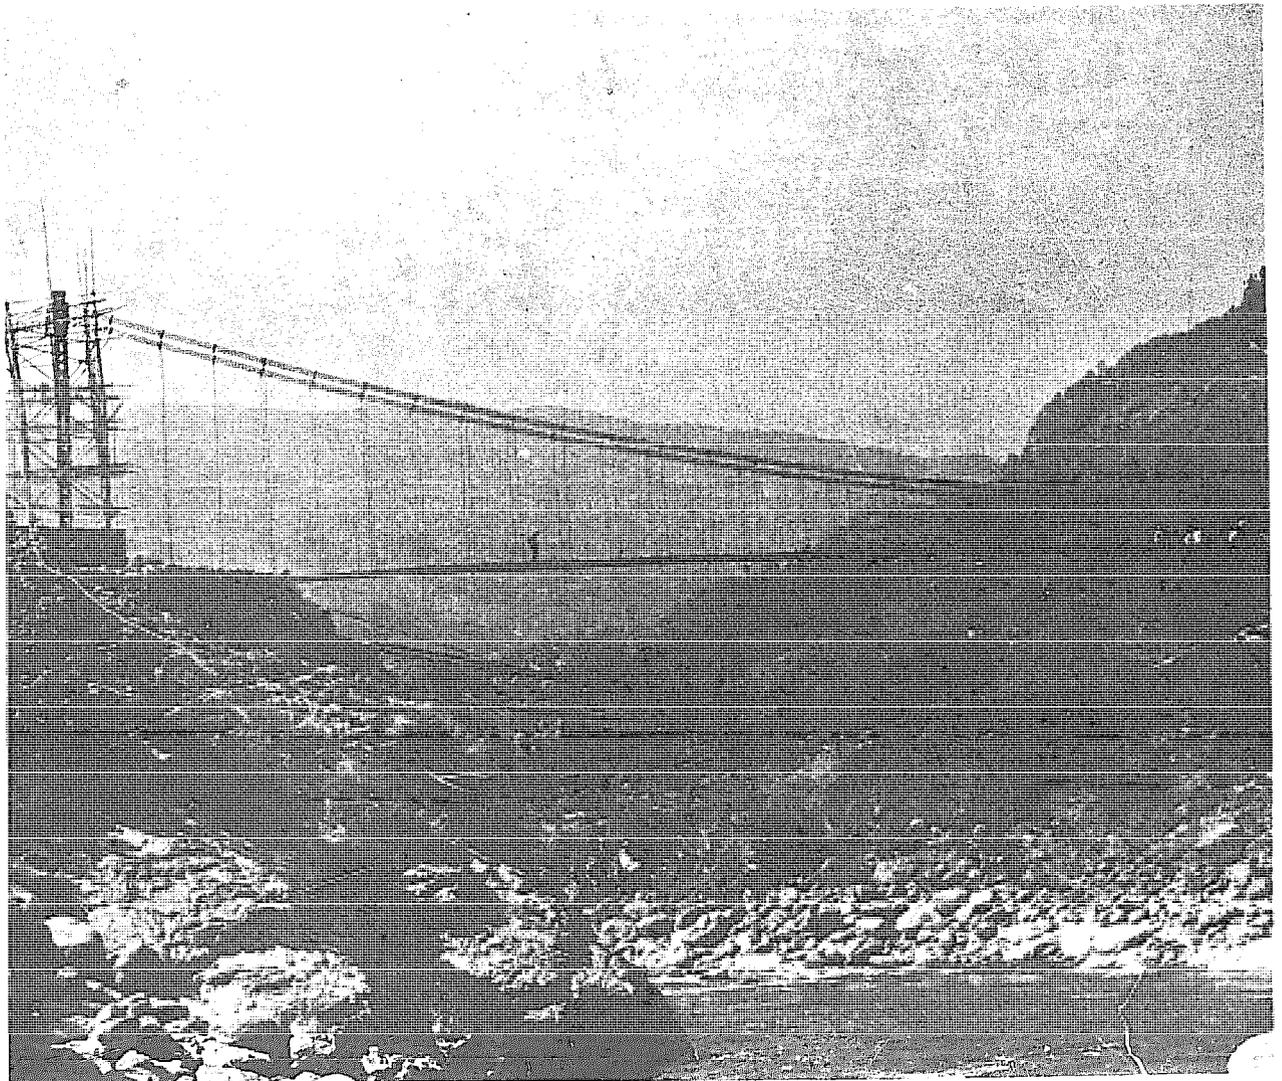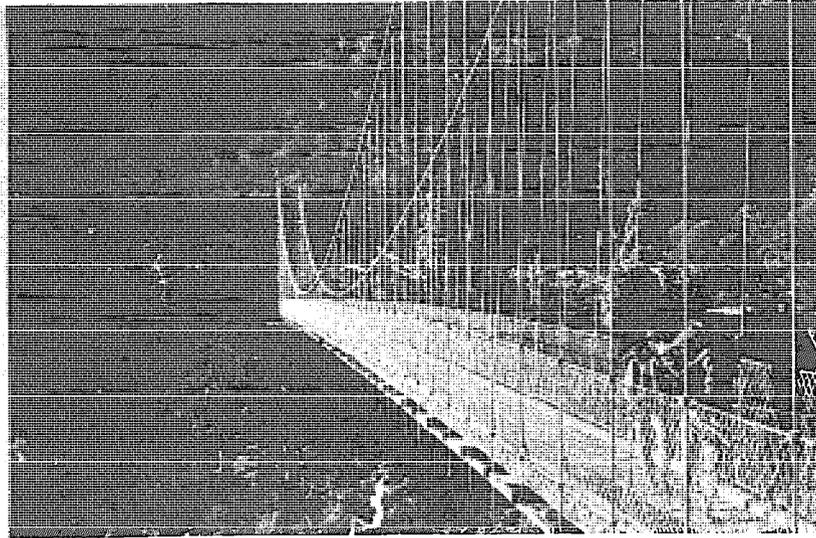

SAT A , Swiss Association for Technical Assistance

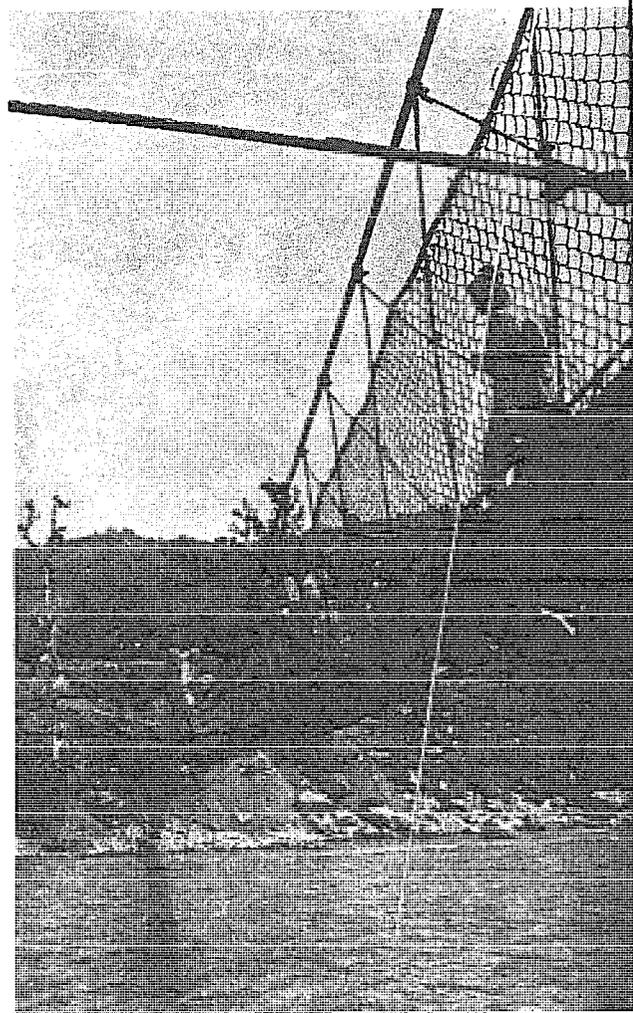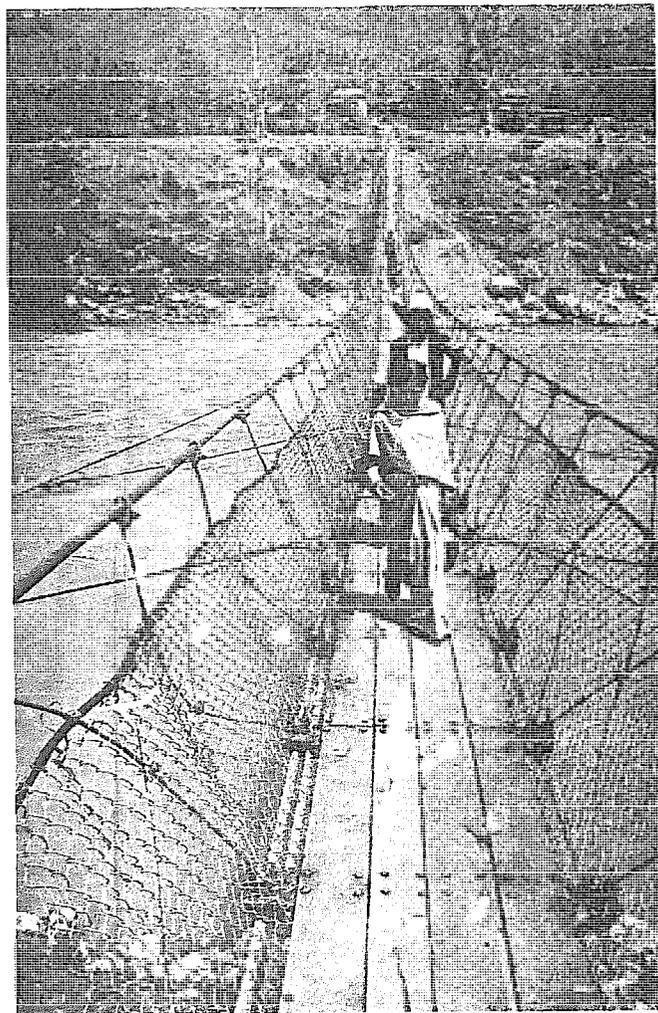

The pictures are showing the Devighat Suspended Bridge of 108 m span
(Trishuli)

PLANNING WORK OF THE SUSPENSION BRIDGE DIVISION

No. : 1.301


Completed Pedestrian Bridges within the Period
1963 - 1976 (without Bridges built for the LDD)

Date : 1. Dec. 76

Sig : *[Signature]*

-  Number of bridges financed by HMG, Roads Department (partly by SATA in kind of steel and cables)
-  Number of bridges financed by US AID
-  Number of bridges financed by World Bank
- Total length of bridges completed in one year

(without bridges built for Local Development Department)

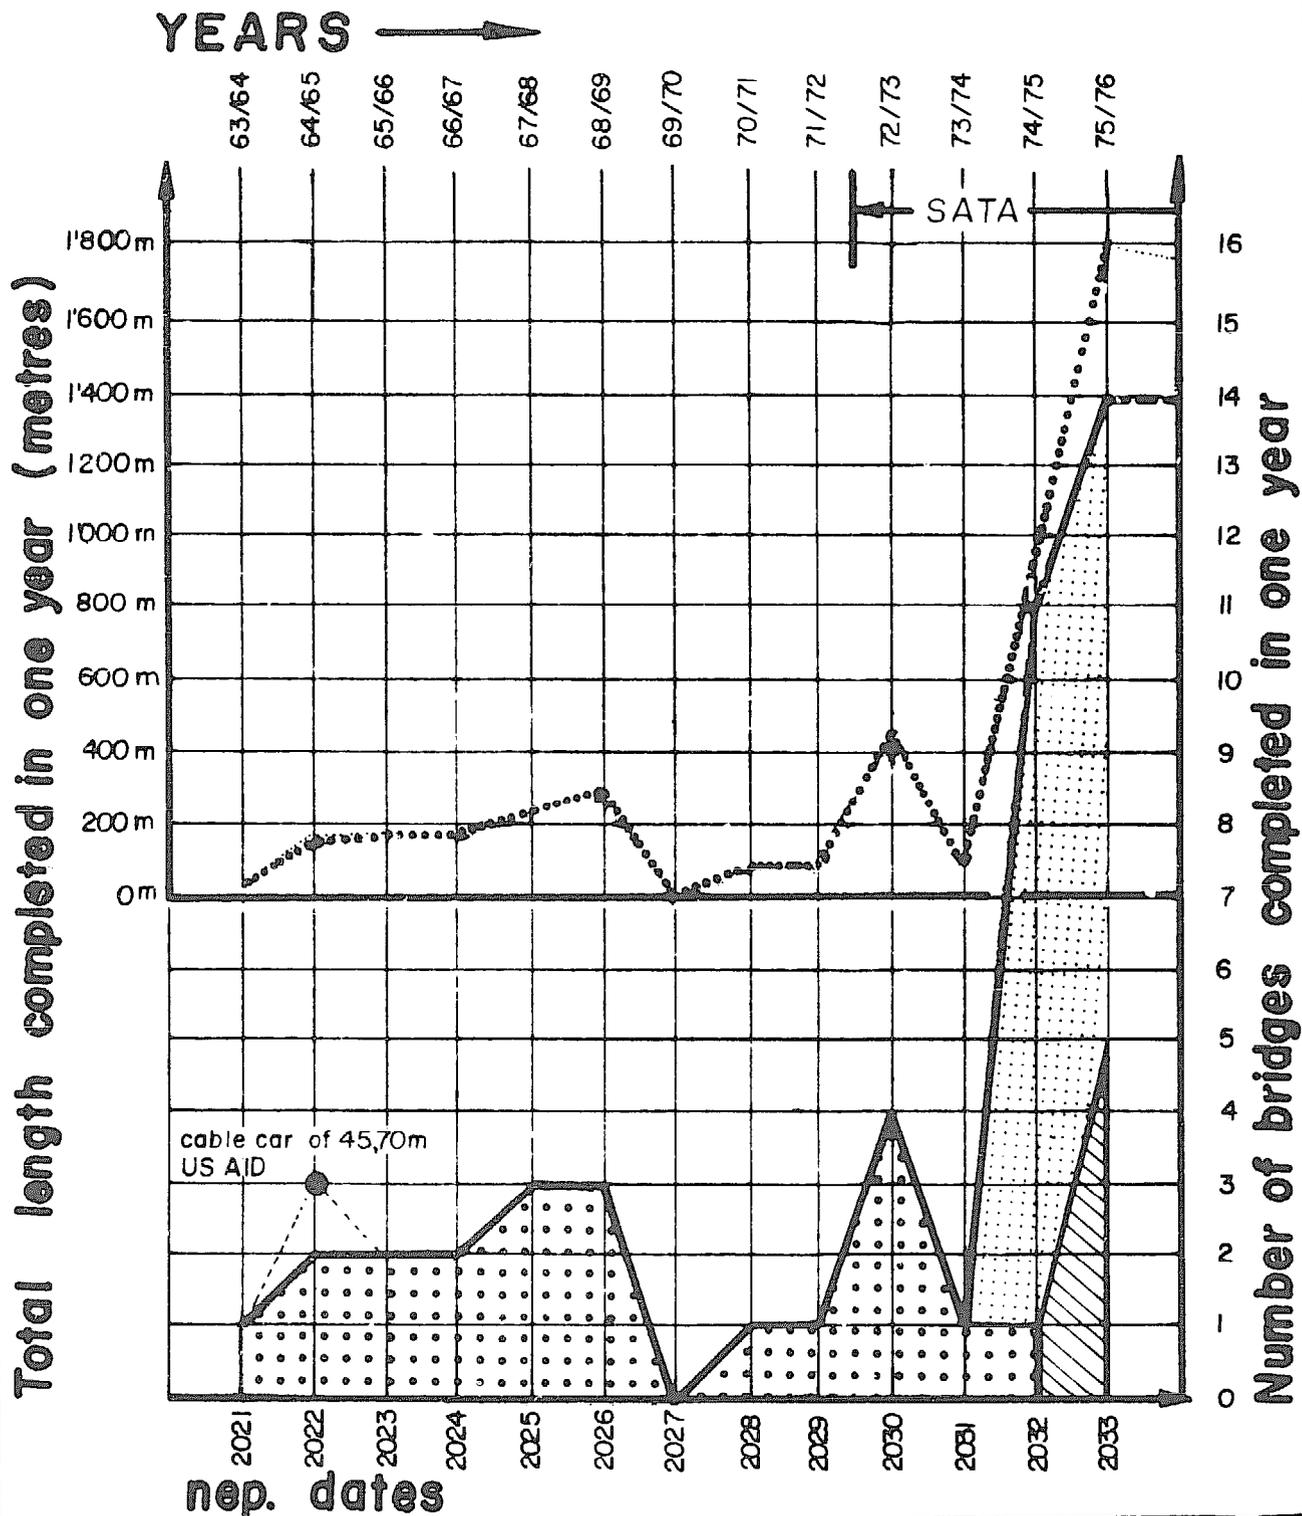

S A T A, Swiss Association for Technical Assistance

PLANNING WORK OF THE SUSPENSION BRIDGE DIVISION

No. : 1.301


Completed Pedestrian Bridges within the Period
1963 - 1976 (without Bridges built for the LDD)

Date : 1. Dec. 76

Sig : *[Signature]*

-  Number of bridges financed by HMG, Roads Department (partly by SATA in kind of steel and cables)
-  Number of bridges financed by US AID
-  Number of bridges financed by World Bank
- Total length of bridges completed in one year

(without bridges built for Local Development Department)

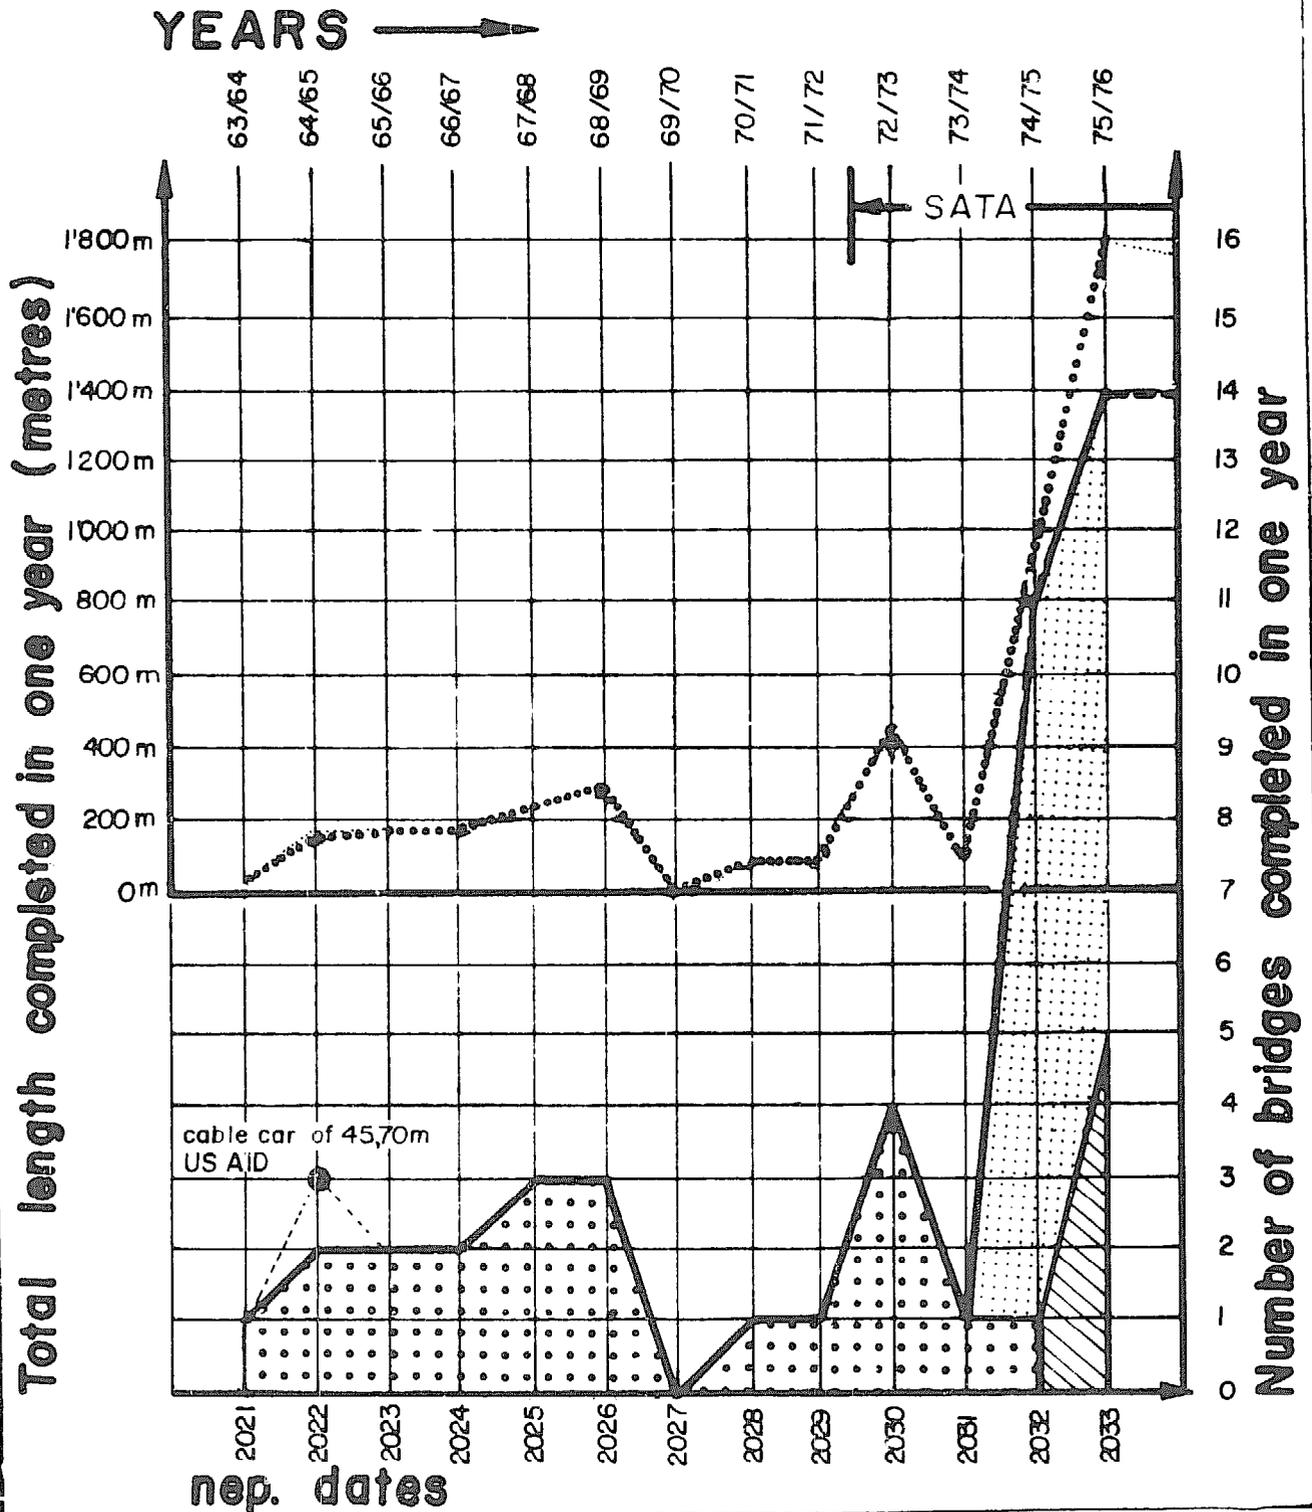

SATA, Swiss Association for Technical Assistance

Phk

Remaining construction sites - to be completed 76/77		New started bridge sites 76/77 - to be completed 76/77		Proposed bridge sites (to be started 77/78) - to be completed 77/78	
# 1 Tallogaon	Suspended Bridge 97 m	# 502 Rawa Khola	Suspended Bridge 72 m	506 auljibi	Suspension Bridge 114 m
+ 2 Similighat	Suspension Bridge 78 m	503 Likhu Khola	Suspension Bridge 70 m	508 lothe	Suspension Bridge 78 m
+ 3 Purlighat	Suspension Bridge 114 m	504 Parewaghat	Suspension Bridge 126 m	510 Cillimay Khola	Suspended Bridge 51 m
+ 4 Keladighat	Suspension Bridge 151 m	# 507 Chackli Ghat	Suspension Bridge 70 m	511 Gulgung Khola	Suspended Bridge 45 m
+ 5 Puchighat	Stay Cable Bridge 186 m	# 509 Ranga Khola	Suspended Bridge 42 m	517 Clutra Pesi	Suspension Bridge 66 m
# 6 Raighat	Suspension Bridge 172 m	512 Dhaunebagar	Suspended Bridge 87 m	523 Sakhatum	Suspended Bridge 75 m
+ 7 Rasawa Dobhan	Suspension Bridge 78 m	# 515 Mangmaya Khola	Suspended Bridge 48 m	524 Ni hu Khola	Suspended Bridge 57 m
# 8 Sabha Khola	Suspension Bridge 115 m	+ 516 lungri Khola	Suspended Bridge 37 m	526 Khwanga Khola	Suspended Bridge 84 m
- to be completed 77/78		522 Puchudi Hat	Suspended Bridge 48 m		
9 Labughat 2 span	Suspension Bridge 150 m	527 Korchabang	Suspended Bridge 48 m		
Key :		- to be completed 77/78			
+ completed until March 1977					
# almost complete					
φ only start of collection of material in 1976/77					

Design of the Bridges by HMG Roads Department since 1975/76

- Suspension Bridges 12 = 36 % (Standardized Bridges)
- Suspended Bridges 21 = 64 % (Standardized Bridges)


Total Bridges 33 = 100 %

Construction season

- remaining 76/77 ... 1 8 8 1
- started 76/77 ... 11 6 6 17
- start 77/78 ... 6 4 4 10
- start 77/78 (1 ... 4 (1 2 (1 6


(1) these bridges are under advanced survey

Steel design by HMG Standard Workshop

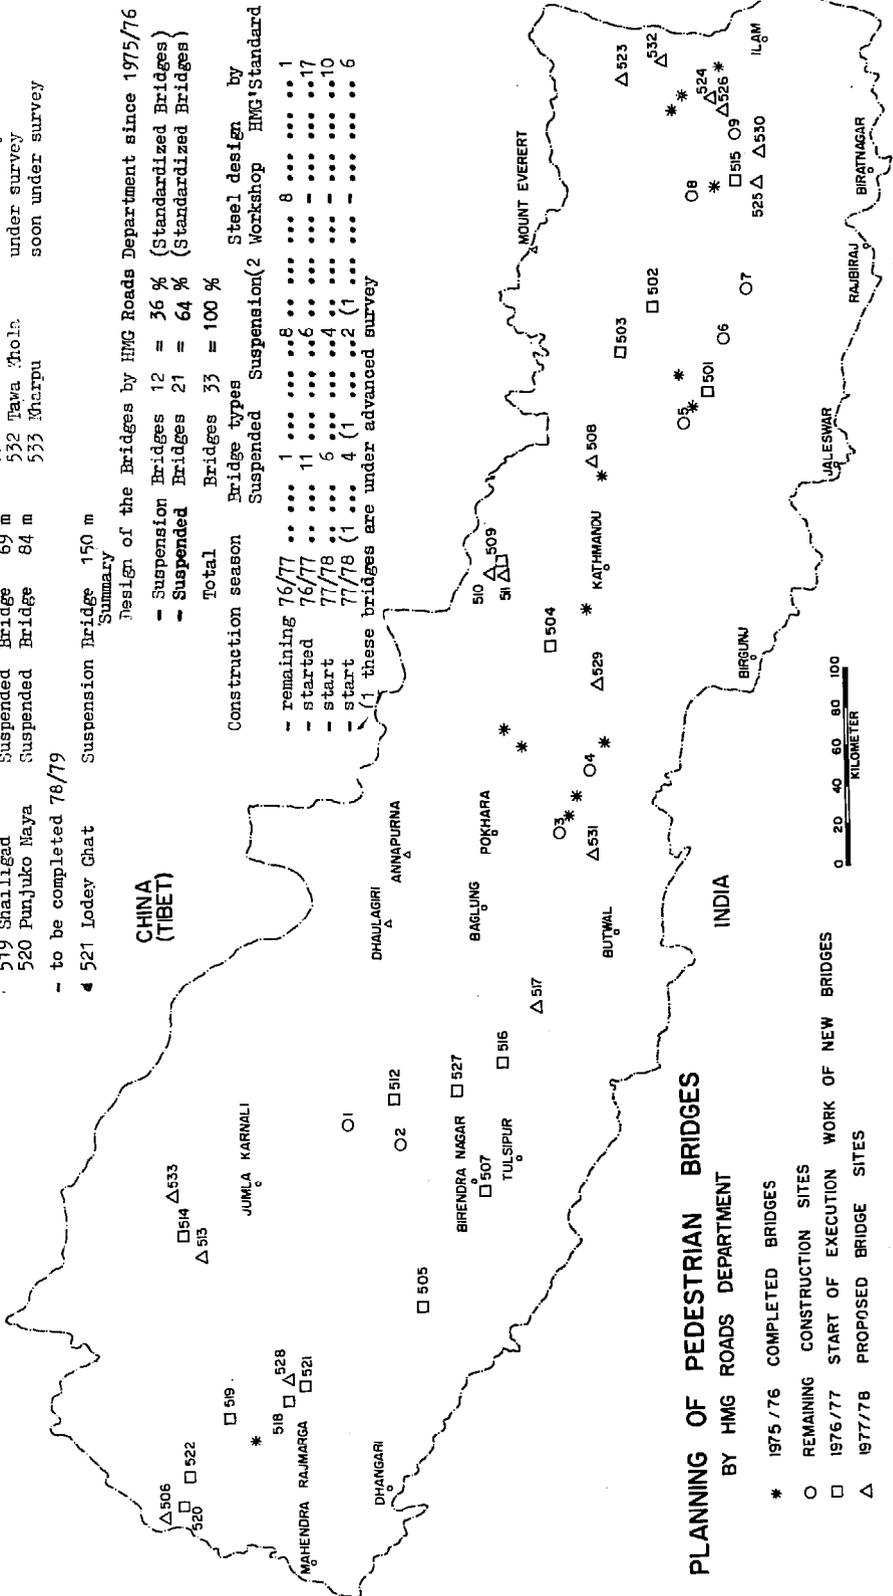


PLANNING OF PEDESTRIAN BRIDGES
 BY HMG ROADS DEPARTMENT

- * 1975/76 COMPLETED BRIDGES
- REMAINING CONSTRUCTION SITES
- 1976/77 START OF EXECUTION WORK OF NEW BRIDGES
- △ 1977/78 PROPOSED BRIDGE SITES

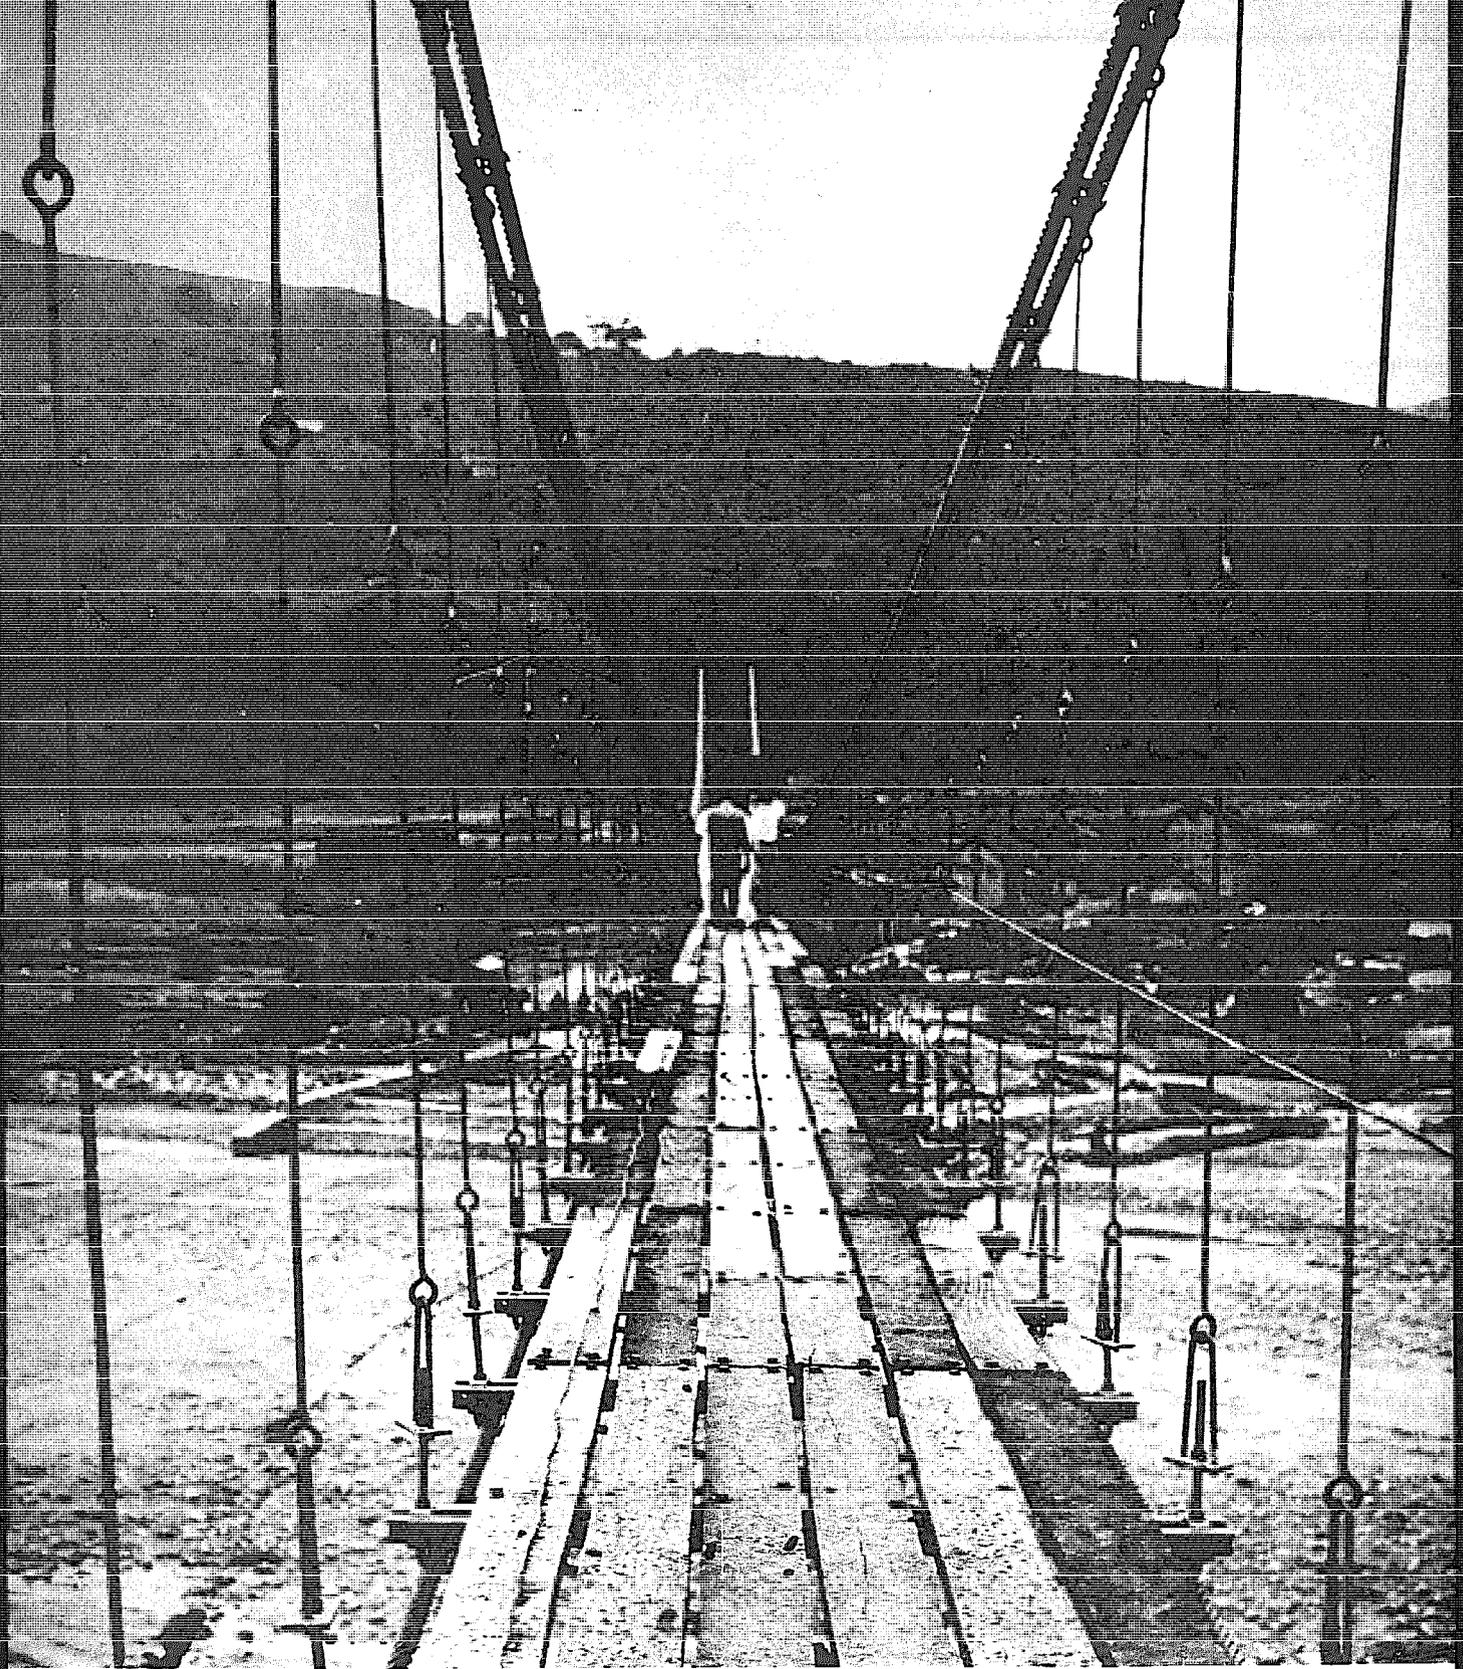

2. BRIDGE DESIGN


SATA, Swiss Association for Technical Assistance

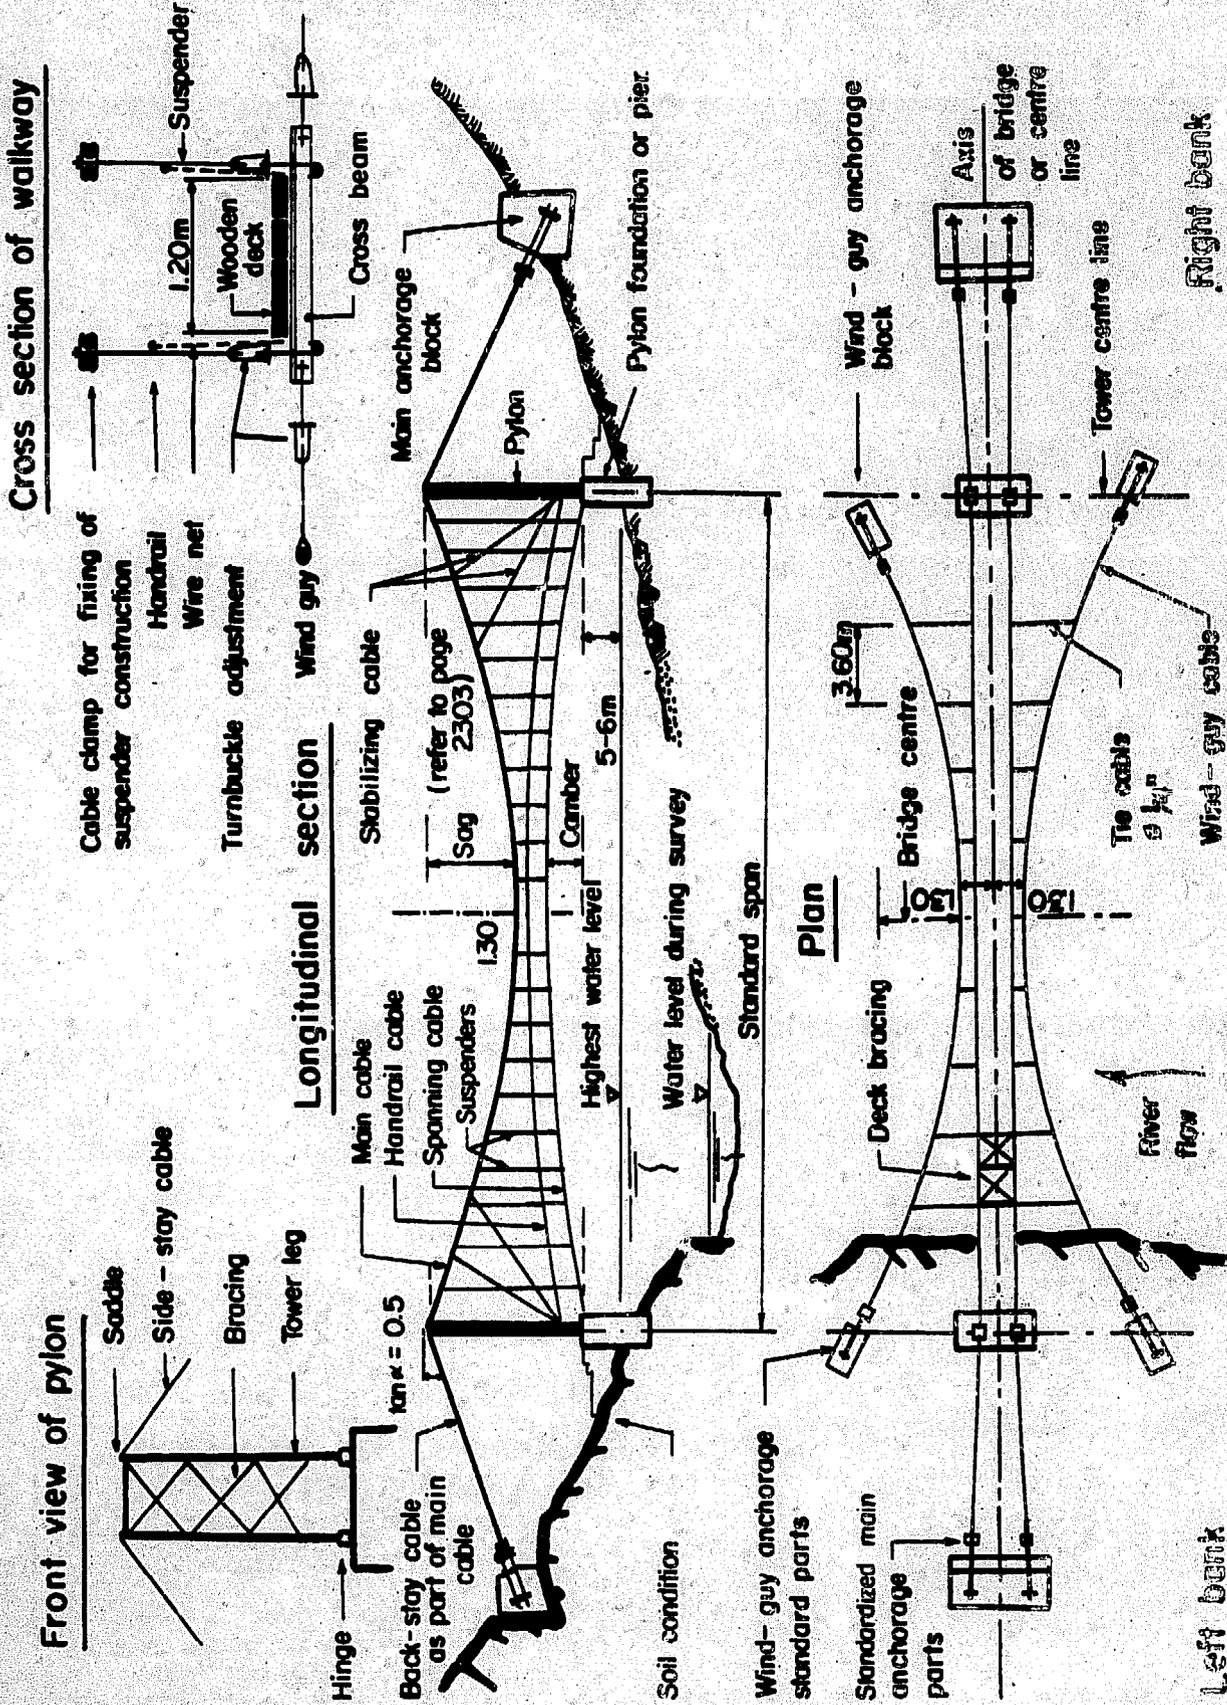

Sag wind guy span $\frac{1}{12}$ - span $\frac{1}{14}$

When a cable is supported at each end to hang freely under its weight, it forms a curve which is part of a catenary or chain line. The parabola line is only slightly different to the catenary and can be used for easy design work.

Example: Divide A-B into 9 equal parts and B-C into 9 equal parts. Connect the points 1' with 1, 2' with 2..... and so on. These lines form the tangent lines of the parabola. The curve of the cable can now be drawn.

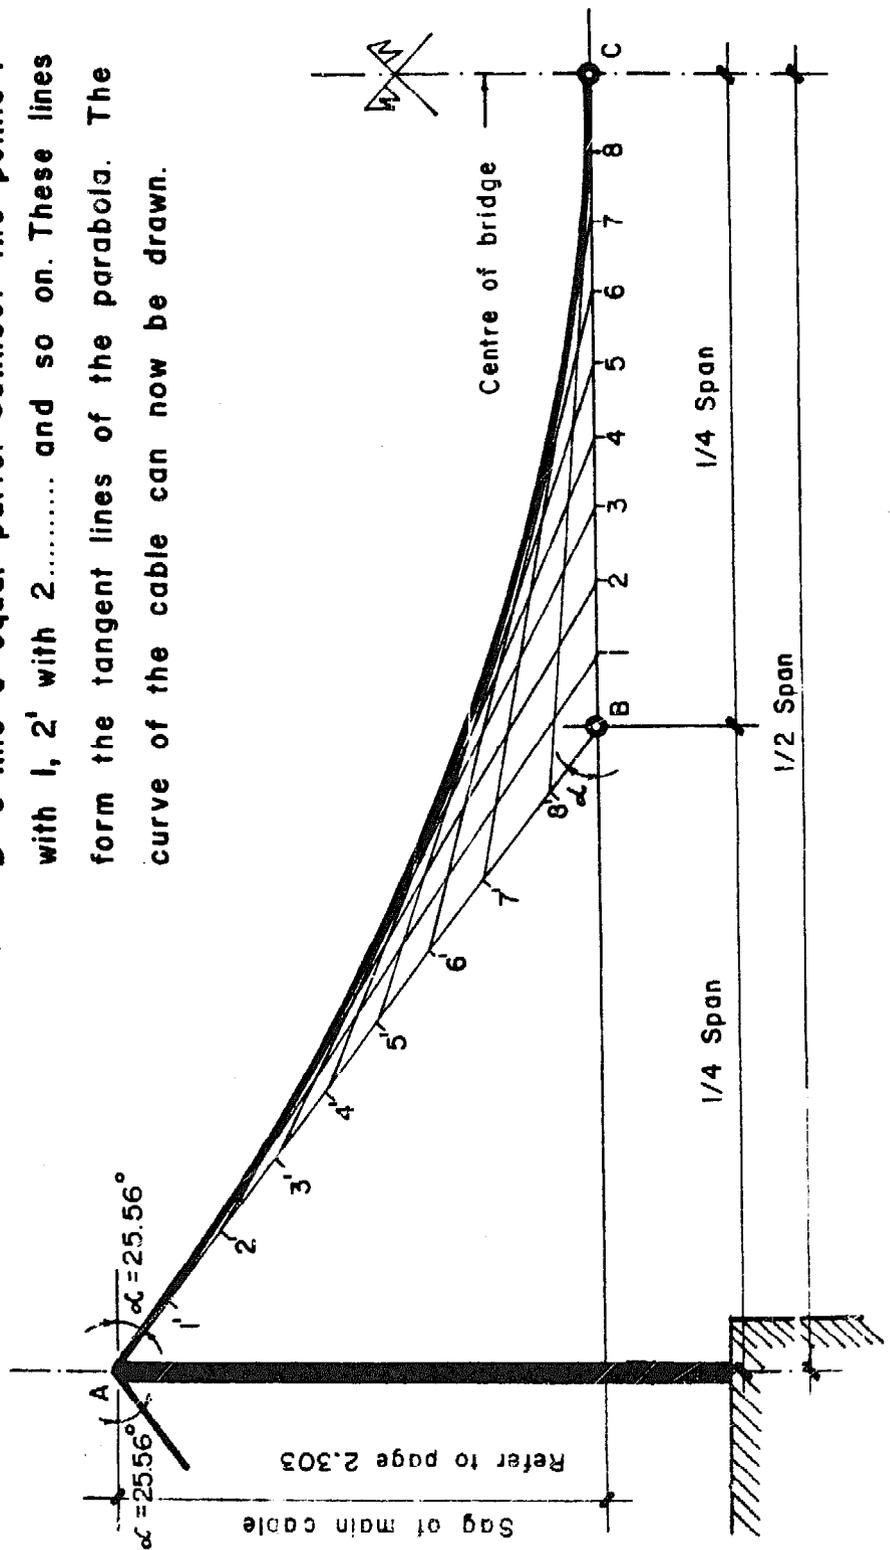


S A T A , Swiss Association for Technical Assistance

According to Parabola form: I) In general $y = \frac{4x}{l} \left(1 - \frac{x}{l}\right) s$.

Example: Given $l = 15.0\text{m}$; $x = 5.0\text{m}$; $S = 150\text{mm}$.

If is: $y = \frac{4 \times 5.00}{15.00} \left(1 - \frac{5.00}{15.00}\right) \times 0.150 = \frac{200}{225} \times 0.150 = 0.889 \times 0.150 = 0.13335 = \text{approx. } 133\text{mm}$.

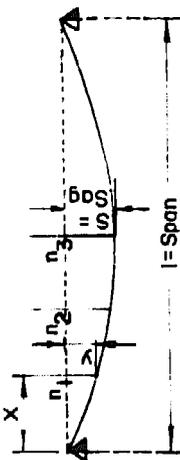


II) For the beam, divided into n equal parts, the value of x y at the point n_x will be

$$y_{n_x} = \frac{4 n_x (n - n_x)}{n^2} s = \alpha s$$

n_x = Index for the end position of the beam panel within the beam-ray, i.e. for n_1, n_2, n_3, \dots up to $\frac{n}{2}$ for which the dimension of the Parabolic superlevation y is to be determined.

The corresponding values of α are given in the following table: (Sources: Stahl im Hochbau, 13. Auflage 1969)

Total no. of panels	α -Factor to calculate the ordinate height y at the end of the $\dots n_x =$															Total no. of panels	
	n_1	n_2	n_3	n_4	n_5	n_6	n_7	n_8	n_9	n_{10}	n_{11}	n_{12}	n_{13}	n_{14}	n_{15}		
4	0.750	1.00	0.960														4
5	0.640																5
6	0.556	0.889	1.00														6
7	0.490	0.816	0.980	1.00													7
8	0.438	0.750	0.938	0.960	1.00												8
9	0.395	0.691	0.889	0.918	0.947	1.00											9
10	0.360	0.640	0.840	0.889	0.918	0.947	1.00										10
11	0.331	0.595	0.793	0.859	0.918	0.947	0.966	1.00									11
12	0.306	0.556	0.750	0.830	0.918	0.947	0.966	0.984	1.00								12
13	0.284	0.521	0.710	0.802	0.918	0.947	0.966	0.984	0.996	1.00							13
14	0.265	0.490	0.673	0.776	0.918	0.947	0.966	0.984	0.997	1.00							14
15	0.249	0.462	0.640	0.750	0.889	0.947	0.966	0.984	0.990	0.999	1.00						15
16	0.234	0.438	0.609	0.730	0.859	0.938	0.984	1.00									16
17	0.221	0.415	0.582	0.720	0.830	0.913	0.969	0.996									17
18	0.210	0.395	0.556	0.691	0.802	0.889	0.951	0.988	1.00								18
19	0.199	0.377	0.532	0.665	0.776	0.864	0.931	0.975	0.997	1.00							19
20	0.190	0.360	0.510	0.640	0.750	0.840	0.910	0.960	0.990	1.00							20
21	0.181	0.344	0.490	0.617	0.726	0.816	0.889	0.944	0.980	0.998							21
22	0.174	0.331	0.471	0.595	0.702	0.793	0.867	0.926	0.967	0.992	1.00						22
23	0.166	0.318	0.454	0.575	0.680	0.771	0.847	0.907	0.953	0.983	0.998						23
24	0.160	0.306	0.438	0.556	0.660	0.750	0.826	0.889	0.938	0.972	0.993	1.00					24
25	0.154	0.294	0.422	0.538	0.640	0.730	0.806	0.870	0.922	0.960	0.986	0.998					25
26	0.148	0.284	0.408	0.521	0.621	0.710	0.787	0.852	0.905	0.947	0.976	0.994	1.00				26
27	0.142	0.274	0.395	0.505	0.604	0.691	0.768	0.834	0.889	0.933	0.966	0.988	0.999				27
28	0.138	0.265	0.383	0.490	0.587	0.673	0.750	0.816	0.872	0.918	0.954	0.980	0.995				28
29	0.133	0.257	0.371	0.476	0.571	0.656	0.732	0.799	0.856	0.904	0.942	0.970	0.989	0.999			29
30	0.129	0.249	0.360	0.462	0.556	0.640	0.716	0.782	0.840	0.889	0.929	0.960	0.982	0.996	1.00		30

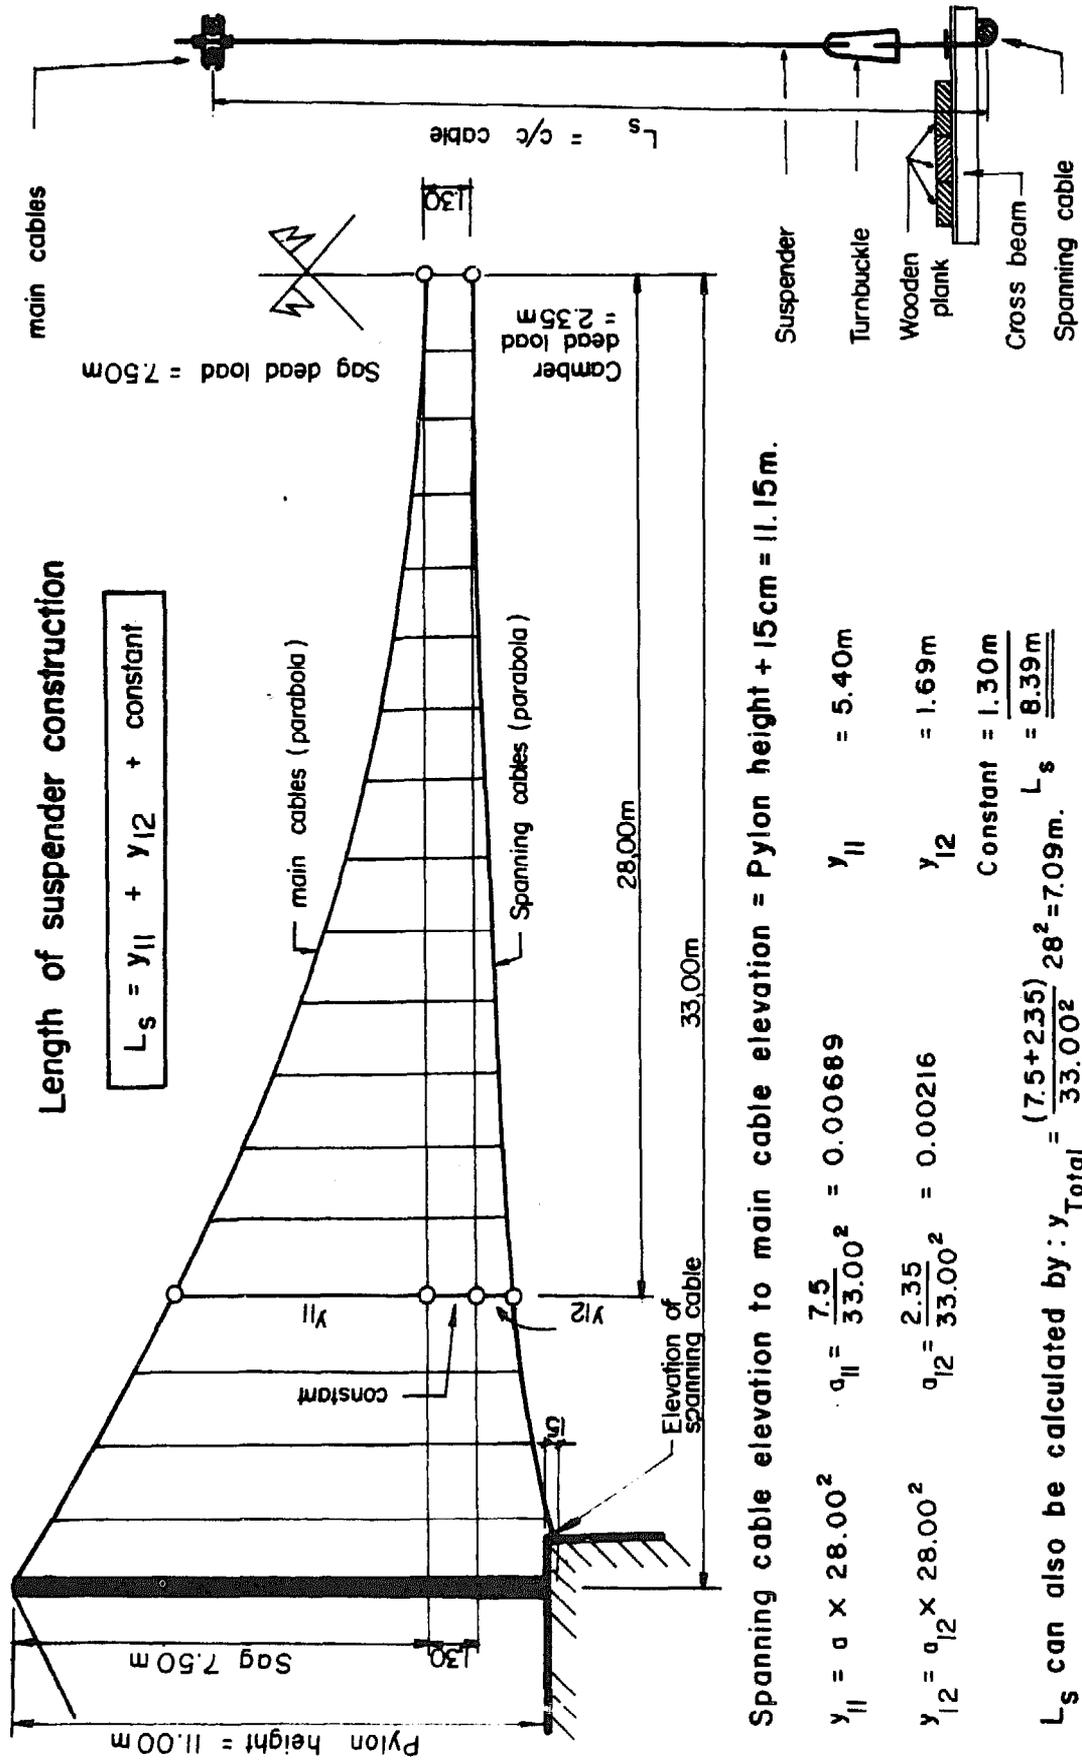

Length of suspender construction

$$L_s = y_{11} + y_{12} + \text{constant}$$

Spanning cable elevation to main cable elevation = Pylon height + 15cm = 11.15m.


$$y_{11} = a \times 28.00^2 \quad a_{11} = \frac{7.5}{33.00^2} = 0.00689 \quad y_{11} = 5.40m$$

$$y_{12} = a_{12} \times 28.00^2 \quad a_{12} = \frac{2.35}{33.00^2} = 0.00216 \quad y_{12} = 1.69m$$

$$L_s \text{ can also be calculated by: } y_{\text{Total}} = \frac{(7.5+2.35)}{33.00^2} \times 28^2 = 7.09m. \quad L_s = \underline{\underline{8.39m}}$$

$$\text{Constant} = 1.30m$$

$$L_s = \frac{1.30m}{8.39m}$$

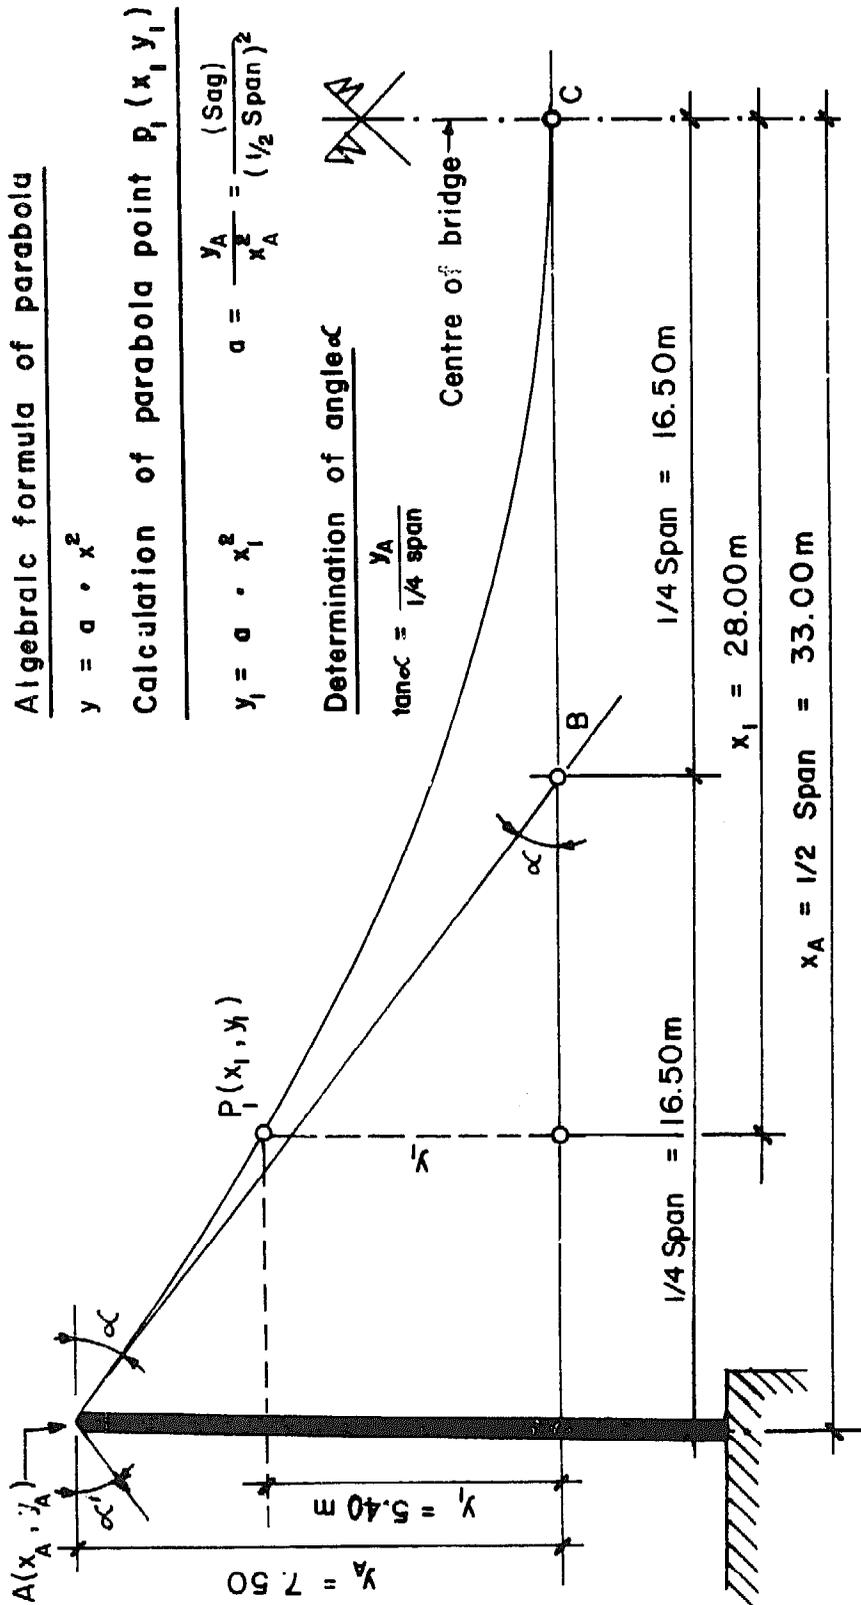

Algebraic formula of parabola

$$y = a \cdot x^2$$

Calculation of parabola point P₁(x₁, y₁)

$$y_1 = a \cdot x_1^2 \quad a = \frac{y_A}{x_A^2} = \frac{(\text{Sag})}{(\frac{1}{2} \text{ Span})^2}$$

Determination of angle alpha

$$\tan \alpha = \frac{y_A}{1/4 \text{ span}}$$

Example:

Given :
 x₁ = 28.00 m
 x_A = 33.00 m
 y_A = 7.50 m

$$a = \frac{7.50}{33.00^2} = 0.00689$$

$$y_1 = 0.00689 \cdot 28.00^2 = 5.40 \text{ m}$$

$$\tan \alpha = \frac{7.50}{16.50} = 0.455 ; \alpha = 24.45^\circ$$

To find: y₁, alpha

Suspension Bridge

The Standard Suspension Bridge is a light suspension bridge, chiefly meant for pedestrian and pack animal traffic. The walk way (gangway) is unstiffened.

This bridge Typ is normally constructed with two pylons and the suspended walkway has an arched profile. The suspension bridge design is normally applied for river cross section with flat banks and is more expensive than the Suspended Bridge (without pylons). It is recommended in cases where the required free-board line cannot be achieved with the suspended bridge (cat walk).

The graphic on page 4.101 shows, that a suspension bridge is between 28 to 80 % expensiver than a suspended bridge.

The main design characteristics of the suspension bridge are as follows :

- Standard spans available 66 - 222 m
- Span intervals of 12 m
- Sag ratio (full loaded) 1/8 to 1/9
- Width of the wooden deck (walkway) ... 1.20 m
- Live load 400 kg/m² or 480 kg/m¹
- Wind load (exposed area) 150 kg/m²
- Available standardized drawings page 2.305
- Further technical data pages 2.303 and 2.304

Walkway and Suspenders

The walk way cross-section for a suspension bridge is shown below. The walkway is supported by adjustable m.s. bar suspenders attached to the main cables at 1.20 m centres. The spanning cables are pretensioned to minimise longitudinal oscillations.


The following spanning cables are used :

Span in m	cable ϕ (inches)
66 - 102	1 "
114 - 186	1 1/4 "
198 - 222	1 1/2 "

The walk way deck is supported on cross beams made of two m.s. angles. The cross beams are spaced at 1.20 m centres and connected together with cross - bracing of m.s. flat section. The wooden deck

is bolted directly to the cross beams. The walkway parapets are constructed in wire netting (3mm wire, galvanized, 90 cm width) which is fastened top and bottom to 1/2 " diametre cables (handrail- and fixation cable).

Walk-way

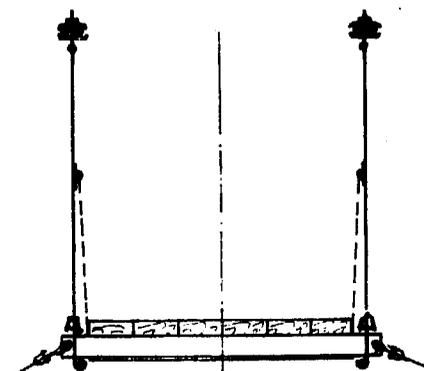

Pylons



Pylons are required for suspension bridges. The structural analysis of pylons for single spans up to 222 m and for multiple spans, using a standard 'middle' span, up to about 400 m length, was undertaken at the request of the Suspension Bridge Division by a Swiss Computer Static firm in Zurich. The structural analysis has been based on Indian Standards.

The pylons are constructed using standard units with two main columns consisting of m.s. angles battened together, the columns being connected together by m.s. angle bracing. For spans of 162 m and beyond side stay cables are used to prevent side sway. The front and backstay cables (main cable) should have the same angles for the full loaded bridge. On the standardized Suspension Bridges the increasing of the backstay cable angle - increasing of slope - of about $\tan_a = 0,05$ shows, that the total load on the pylon increases with about 5%.

tan of back stay cable	tan of front stay cable	total vertical load on the pylon
0.500 (26,56°)	0.500 (26,56°)	100 %
0.550 (28,81°)	0.500 "	105 %
0.600 (30,96°)	0.500 "	110 %
0.650 (33,02°)	0.500 "	115 %
0.700 (34,99°)	0.500 "	120 %
0.750 (36,87°)	0.500 "	125 %
1.000 (45,00°)	0.500 (26,56°)	150 %

The above numbers make it clear, that the back stay angle must be correct or the pylons will be overloaded.

The standardized Pylons are constructed as moveable, e.g. they have hinges at the bottom.

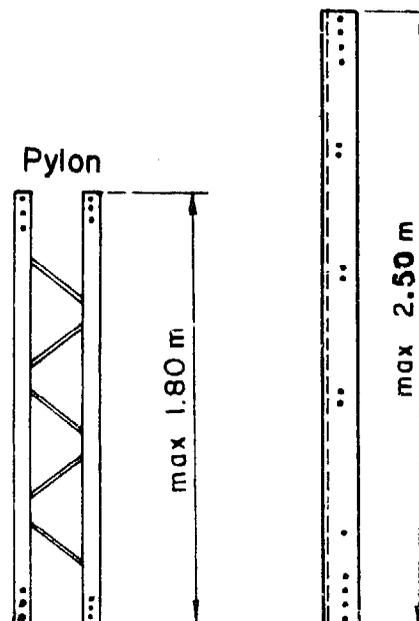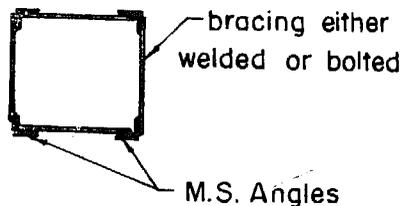

Further information are available on page 2.304


S A T A , Swiss Association for Technical Assistance

HIS MAJESTY'S GOVERNMENT
MINISTRY FOR WORKS
AND TRANSPORT
ROADS DEPARTMENT

सं. ५ को सारक
निर्माण तथा यातायात सञ्चालन
सडक विभाग

STANDARD SUSPENSION BRIDGES 66-222 m

Technical data

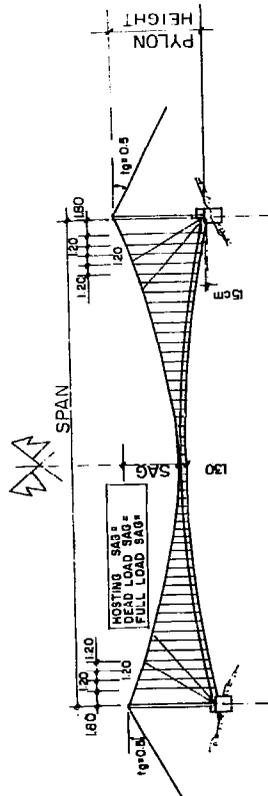

-modulus of elasticity = 0'500kg/mm² - Specification for steel wire ropes for general purpose Table 1: 6x19(12/3/1) with w.s.c.(wire strand core). Tenelle strength of wire 160kg/mm² (according to Indian Standard)

SPAN m	pylon height	main cables		loading cases(11m)		sags (m)			total tension (t)			total breaking load(t)		factor of safety		
		φ	Nos	hoisting	dead	hoisting	dead	full	hoisting	dead	full	hoisting	dead	hoisting	dead	full
66	11.00	1/2"	2	0.011	0.12	0.60	7.43	7.57	8.08	0.88	9.50	45.02	154	175.00	16.20	3.42
78	12.80	1/2"	2	0.011	0.12	0.60	8.99	9.18	9.85	1.02	10.99	51.90	154	175.98	14.01	2.97
90	14.70	1/4"	4	0.016	0.12	0.60	10.81	10.99	11.60	1.66	12.30	58.92	217.6	131.08	17.69	3.69
102	16.50	1/4"	4	0.016	0.12	0.60	11.72	11.96	12.75	1.95	14.44	68.42	217.6	111.59	15.10	3.18
114	18.30	1/2"	4	0.022	0.12	0.60	13.29	13.51	14.25	2.97	15.96	76.47	308	103.70	19.30	4.02
126	18.30	1/2"	4	0.022	0.12	0.60	13.65	13.94	14.88	3.49	18.68	88.50	308	88.25	16.49	3.48
138	21.90	1/2"	4	0.022	0.12	0.60	15.19	15.54	16.64	3.77	20.16	95.30	308	81.70	15.28	3.23
150	21.90	1/2"	4	0.022	0.12	0.60	16.93	17.30	18.50	4.01	21.48	101.71	308	76.81	14.34	3.03
162	25.50	1/4"	6	0.024	0.14	0.60	18.74	19.20	20.50	4.63	26.47	107.61	326.4	70.50	12.33	3.03
174	25.50	1/2"	6	0.033	0.14	0.62	20.25	20.65	21.75	6.80	28.40	120.61	462	67.94	16.27	3.83
186	29.10	1/2"	6	0.033	0.14	0.62	21.62	22.10	23.40	7.28	30.33	128.27	462	63.46	15.23	3.60
198	29.10	1/2"	6	0.033	0.15	0.62	23.25	23.80	25.20	7.68	34.27	135.29	462	60.10	13.48	3.41
210	32.70	1/2"	6	0.033	0.15	0.62	23.98	24.65	26.25	8.33	37.06	145.57	462	55.46	12.47	3.17
222	32.70	1/2"	6	0.033	0.15	0.62	24.96	25.70	27.50	8.93	39.62	155.01	462	51.73	11.66	2.98

AVAILABLE DRAWINGS FOR STANDARD SUSPENSION BRIDGES

TITLE	2 cables			4 cables				6 cables							
	SPAN NO.	66	78	90	102	114	126	138	150	162	174	186	198	210	222
Lay out	/10														
Main anchorage block	/20														
Main Cable anchorage parts	/31														
Walk way and pylon anchorage	/32														
Wind guy anchorage ϕ 1" Cable	/33				*	*	*	*	*	*	*	*	*	*	*
Wind guy anchorage ϕ 1 1/4" Cable	/34														
Wind guy anchorage ϕ 1 1/2" Cable	/35	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Pylon details and Steelpartlist	/51														
Pylon assembly drawing	/52														
Side stay Cable parts ϕ 1"	/61	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Side stay Cable parts ϕ 1 1/4"	/62	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Walk - way (gang way)	/71														
Suspender	/72														
Stabilizing Cable clamps for ϕ 1/2"-4main Cables	/81	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Stabilizing Cable clamps for ϕ 1/2"-6main Cables	/82	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Stabilizing Cable clamps for ϕ 1"-6main Cables	/83	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Wind tie Cable clamps for ϕ 1"	/91				*	*	*	*	*	*	*	*	*	*	*
Wind tie Cable clamps for ϕ 1 1/4"	/92				*	*	*	*	*	*	*	*	*	*	*
Wind tie Cable clamps for ϕ 1 1/2"	/93	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Total drawings		12	12	13	11	13	13	13	13	14	14	14	14	14	14

If Rock-anchorage parts are required please refer to Standard drawing "ROCK"

* means drawings not required.

Suspended Bridge (cat walk cable bridge)

This bridge type is designed for pedestrian and pack animal traffic and is a modern version of Nepal's age old traditional bridge, the Jholunge, which was built using bamboo ropes, chains or used ropeway cables. The bridge cables are anchored directly to the anchor blocks, thus avoiding the necessity of expensive structures of the pylon. The walkway (gangway) is unstiffened and directly fixed to the main support structure and has a slight sag profile. The sag of the main support structure is small and as experienced already on several bridges in Nepal, built with HMG's Standard Design, longitudinal and lateral oscillations are surprisingly low. Being much lower in the cost than the suspension bridge with pylons, the suspended bridge design has been strongly applied within the bridge programme of the Roads' Department since fall 1975, whenever the required free-board could be achieved.

The main design characteristics of the suspended bridge are as follows :

- Standard spans available 39 - 126 m
- Span intervals of 3m (39 to 96 m)
6m (102 to 126 m)
- Width of the timber deck (gangway) 1.10 m (39 to 60 m)
0.97 m (63 to 87 m)
0.98 m (90 to 126m)
- Live load 425 kg/m1 (39 to 51 m)
410 kg/m1 (54 to 60 m)
460 kg/m1 (63 to 126m)
- Wind load (exposed area) 150 kg/m2
- Available standard drawings page 2.404
- Further technical data page 2.403


Walkway (Gangway)

The walk way cross section for a suspended bridge is shown on the next page. The walkway is supported directly on the main bridge cable on channel section cross beams at 1.20 m centres, the cross beams being connected together with cross bracing of m.s. flat section. The timber decking is nailed to nailing strips which are bolted to the cross beams. The handrails are formed by cables and the following diameters are used :

39 to 60 m span	_____	$\phi \frac{1}{2}$ " cable
63 to 126 m span	_____	$\phi 1$ " cable


Differential movement between the handrail and main cables is prevented by m.s. bar connectors. The parapet is constructed of wire netting (3mm wire, galvanized, 120 cm width) which is fastened at the top to the handrail cable and at the bottom either nailed to the timber decking for spans 39 to 60 m or fastened to a $\frac{1}{2}$ inch fixation cable for spans 63 to 126 m.

WALK-WAY

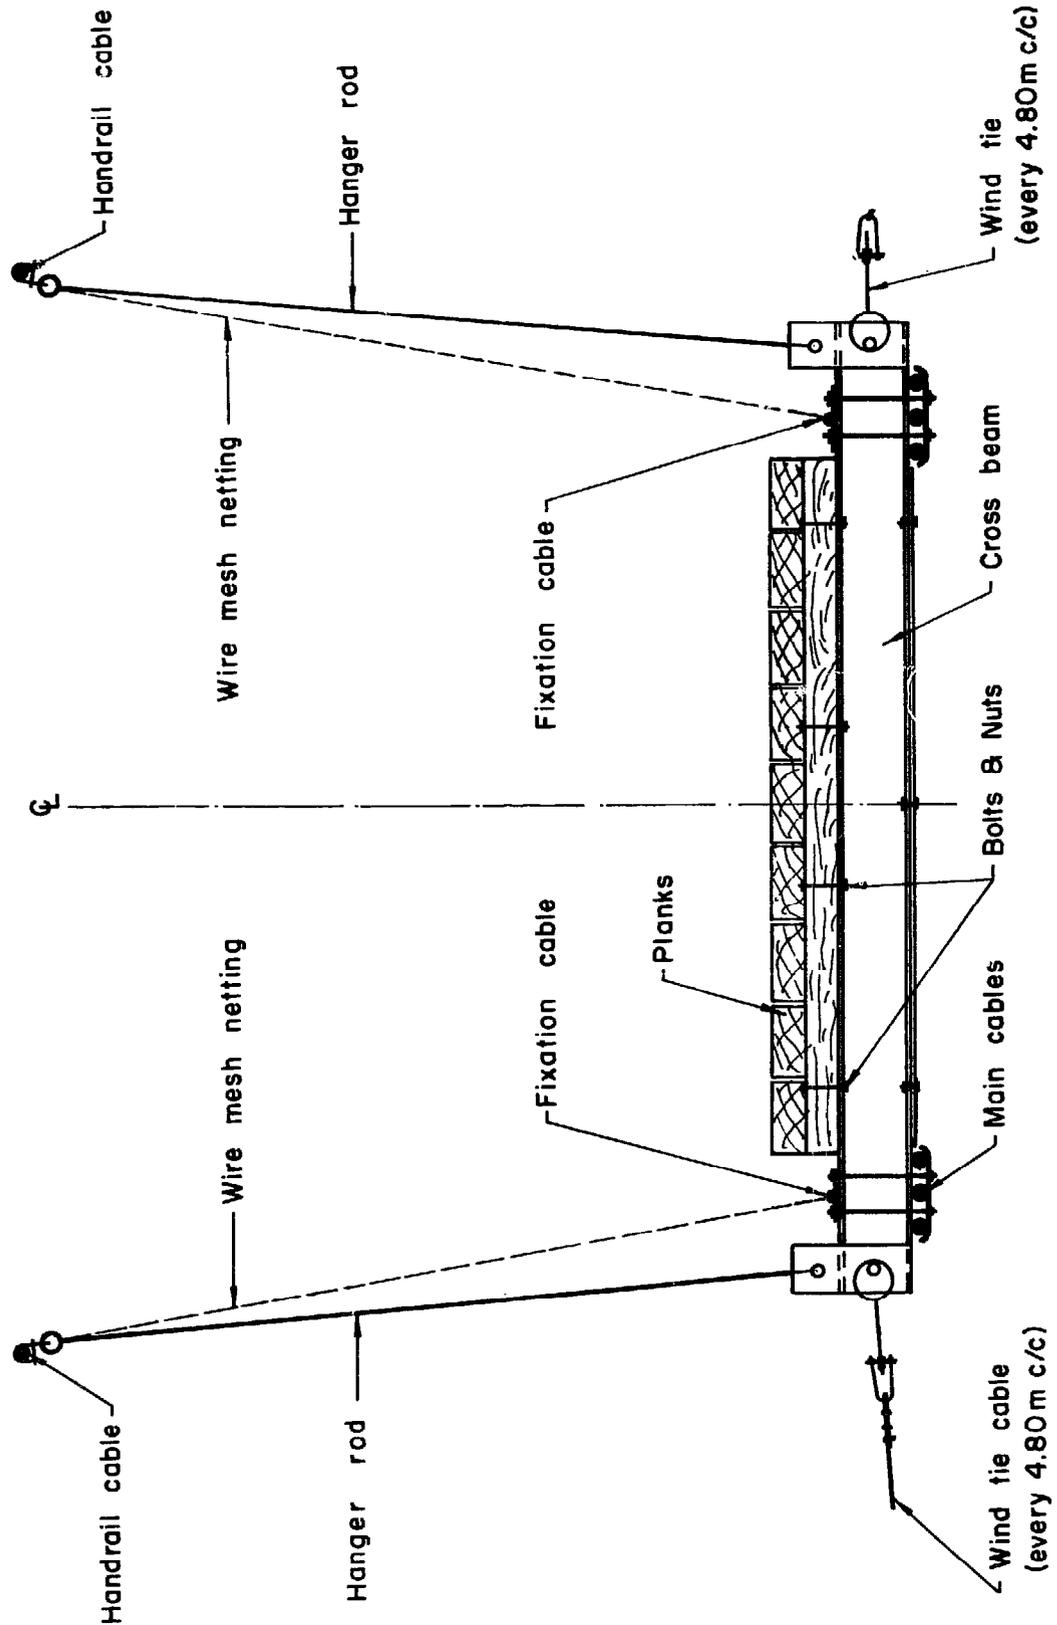

STANDARD SUSPENDED BRIDGES 39-126m

Technical data

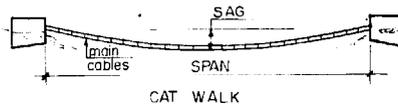

modulus of elasticity = 10⁵00 kg/mm² - Specification for steel wire ropes for general purposes Table I: 6x19(12/6/1) with w.c. (wire strand core). Tensile strength of wire 160 kg/mm² (according to Indian Standard) length of cable between the faces of foundation

SPAN m	main cables		loading cases (t/m)			sags (m)			total tension (t)			factor of safety			length of cable between the faces of foundation				
	φ	Nos	hoisting	dead	full	hoisting	dead	full	hoisting	dead	full	hoisting	dead	full	hoisting	dead			
39	1/2"	2	0.62	0.011	0.075	0.50	1.12	1.34	2.00	1.89	10.74	48.52	15.4	81.48	14.34	3.17	39.05	39.09	39.27
42	1/2"	2	0.62	0.011	0.075	0.50	1.28	1.48	2.20	1.91	11.28	51.20	15.4	80.63	13.65	3.01	42.07	42.11	42.31
45	1/2"	2	0.62	0.011	0.075	0.50	1.55	1.79	2.50	1.81	10.74	51.86	15.4	85.08	14.34	2.97	45.11	45.16	45.37
48	1/2"	2	0.62	0.011	0.075	0.50	1.84	2.06	2.80	1.74	10.64	52.81	15.4	88.51	14.47	2.92	48.16	48.21	48.44
51	1/2"	2	0.62	0.011	0.075	0.50	2.22	2.42	3.15	1.63	10.26	53.16	15.4	94.48	15.01	2.90	51.23	51.28	51.52
54	1/2"	2	0.62	0.011	0.090	0.50	2.63	2.81	3.55	1.52	11.67	51.34	15.4	101.02	13.29	3.00	54.29	54.39	54.62
57	1/2"	2	0.62	0.011	0.090	0.50	3.00	3.20	3.95	1.49	11.42	51.41	15.4	103.41	13.48	3.00	57.36	57.48	57.73
60	1/2"	2	0.62	0.011	0.090	0.50	3.44	3.66	4.40	1.44	11.07	51.14	15.4	106.94	13.91	3.01	60.50	60.57	60.86
63	1/2"	4	1.924	0.022	0.100	0.56	1.68	2.03	3.15	6.53	24.64	89.95	308	47.17	12.50	3.42	63.06	63.12	63.42
66	1/2"	4	1.924	0.022	0.100	0.56	1.75	2.14	3.30	6.88	25.66	94.41	308	44.77	12.00	3.26	66.06	66.13	66.44
69	1/2"	4	1.924	0.022	0.100	0.56	1.80	2.21	3.45	7.31	27.15	98.51	308	42.13	11.34	3.13	69.06	69.13	69.46
72	1/2"	4	1.924	0.022	0.100	0.56	1.92	2.33	3.60	7.47	28.04	102.80	308	41.23	10.98	3.00	72.07	72.14	72.48
75	1/2"	4	1.924	0.022	0.100	0.56	2.11	2.60	3.90	7.34	27.30	103.12	308	41.96	11.28	2.99	75.09	75.18	75.54
78	1/2"	4	1.924	0.022	0.100	0.56	2.51	2.91	4.20	6.72	26.42	103.75	308	45.83	11.66	2.97	78.15	78.23	78.60
81	1/2"	4	1.924	0.022	0.100	0.56	2.91	2.28	4.55	6.26	25.33	103.46	308	49.20	12.16	2.98	81.22	81.30	81.68
84	1/2"	4	1.924	0.022	0.100	0.56	3.20	3.55	4.85	6.13	25.20	104.52	308	50.24	12.22	2.95	84.27	84.35	84.75
87	1/2"	4	1.924	0.022	0.100	0.56	4.21	4.44	5.30	5.04	21.75	102.90	308	61.10	14.16	2.99	87.54	87.60	87.86
90	1/2"	6	2.886	0.033	0.120	0.58	2.36	2.89	4.50	4.24	42.39	133.08	462	32.44	10.90	3.47	90.08	90.17	90.60
93	1/2"	6	2.886	0.033	0.120	0.58	2.48	3.00	4.65	4.47	43.60	137.52	462	31.93	10.60	3.36	93.09	93.18	93.62
96	1/2"	6	2.886	0.033	0.120	0.58	2.53	3.11	4.80	5.11	44.82	141.96	462	30.58	10.31	3.25	96.09	96.19	96.04
102	1/2"	6	2.886	0.033	0.120	0.58	2.72	3.30	5.10	5.87	47.87	150.83	462	29.11	9.65	3.06	102.10	102.20	102.68
108	1/2"	6	2.886	0.033	0.120	0.58	3.17	3.76	5.60	5.28	46.98	154.22	462	30.23	9.83	3.00	108.15	108.26	108.77
114	1/2"	6	2.886	0.033	0.120	0.58	3.86	4.40	6.25	14.01	44.83	154.33	462	32.98	10.31	2.99	114.26	114.37	114.91
120	1/2"	6	2.886	0.033	0.120	0.58	4.50	5.04	6.90	13.35	43.46	155.25	462	34.61	10.63	2.98	120.17	120.49	121.06
126	1/2"	6	2.886	0.033	0.120	0.58	5.09	5.62	7.50	12.87	42.40	153.47	462	35.89	10.90	3.01	126.55	126.67	127.19

HIS MAJESTY'S GOVERNMENT MINISTRY FOR WORKS AND TRANSPORT ROADS DEPARTMENT

S A T A , Swiss Association for Technical Assistance

AVAILABLE DRAWINGS FOR STANDARD SUSPENDED BRIDGES

TITLE	NO	2 Main cables								4 Main cables								6 Main cables							
		39	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	87	90	93	96	102	108	114	120
Lay out (without any wind bracing)	Span/10	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Lay out (Wind tie)	/11	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Lay out (Wind guy ϕ 1")	/12	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Lay out (Wind guy ϕ 1 1/4")	/13	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Lay out (Wind guy ϕ 1 1/2")	/14	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Main cable drum anchorage for 2 cables without clamps + Handrail cable anchorage	/20	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Main cable drum anchorage for 2 cables with clamps + Handrail cable anchorage	/21	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Main cable drum anchorage for 4 cables	/22	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Main cable drum anchorage for 6 cables	/23	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Handrail cable anchorage ϕ 1" cable	/24	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Walk-way for 2 main cables without wind tie	/30	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Walk-way for 4 main cables including wind ties ϕ 1/4" every 4.80m	/31	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Walk-way for 6 main cables including wind ties ϕ 1/4" every 4.80m	/32	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Wind tie connecting clamps on the walk-way with 2 main cables	/33	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Wind tie anchorage for cables ϕ 1/2"	/41	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Wind guy anchorage for cables ϕ 1"	/42	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Wind guy anchorage for cables ϕ 1 1/4"	/43	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Wind guy anchorage for cables ϕ 1 1/2"	/44	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.	
Total drawings		4	4	4	4	3	3	3	5	5	7	7	7	5	5	5	5	5	7	7	7	7	7	5	

If Rock-anchor parts are required please refer to standard drawing "ROCK"

n.r. means drawings not required

Wind - Bracing

The Standard Design details of wind bracing are concerning the anchorage details for cable diameters. The detail shows, that adjustment to take up the pretension are proposed.


However, the actual layout of the windguy cables is dependent to a large extent on the bridge span and the topography of the bridge site, two main systems are employed as shown below.

The main characteristics of the wind - bracing systems are as follows :


- Standard 'cable' (guy) ϕ 1", 1 1/4" and 1 1/2" (6 x 19, 6/12/1)
- Standard wind tie ϕ 1/2" when tie only (below 60 m span)
 ϕ 3/4" when wind guy cable used
- Wind tie intervals 3.60 m at Suspension Bridges
 4.80 m at Suspended Bridges
- Sag ratio 1/12 to 1/14
- Wind load (exposed area) 150 kg/m²
- Wind load supported by bracing 100 kg/m¹
- Available standardized drawings pages 2.305 and 2.404

Diagonal system (used at short span suspended bridges)

For very short spans (up to about 51m) of suspended bridges only at real windy sites wind bracing should be proposed. For spans between 54 and 60 m the diagonal system is used.

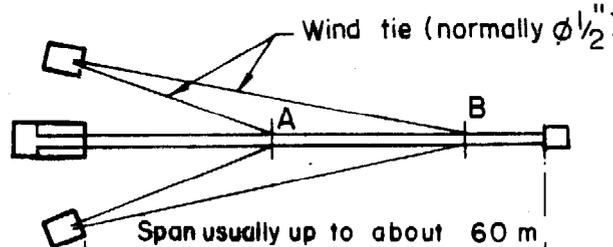

Parabolic system (used at suspended and suspension bridges)

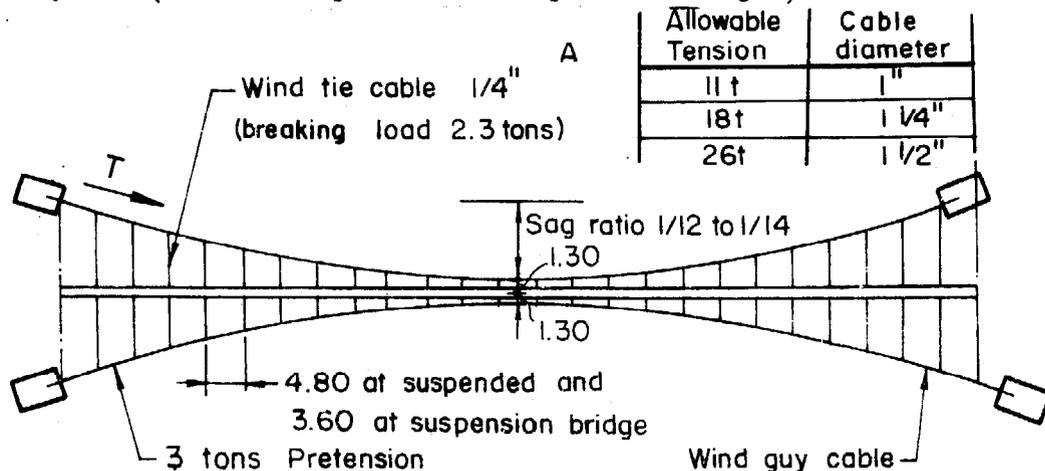


SINGLE CABLE UNDER UNIFORMLY DISTRIBUTED LOAD (level span)

A curved cable is a basic component of any suspension structure. Since the configuration corresponding to a uniformly distributed load occurs quite often in suspension structures, an understanding of its behavior under static as well as dynamic loads is basic. The solid line in the sketch below represents the initial configuration of an unloaded hanging cable attached to immovable supports at its ends. Since the cable will assume a parabolic configuration under uniform load, the initial curve could be assumed to be parabola. The assumed initial configuration has no effect on further analysis. The problem is to find the deflection (dotted) configuration, the force in the cable, and the forces on the supports. The following notation is used.

No load (initial configuration):

- l = horizontal distance between supports
- L = developed length of cable
- f = sag of cable
- A = cross-sectional area of cable
- E = modulus of elasticity of cable

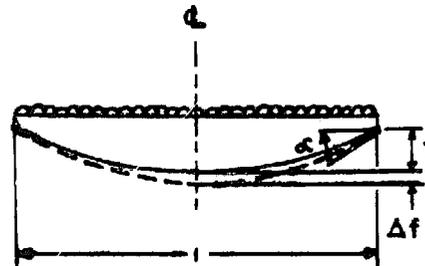**Loaded cable:**

- T = tension in cable at support caused by superimposed loads
- q = weight of cable per unit length (assumed uniform)
- α = angle between horizontal and tangent to cable at support
- V = vertical component of T at support
- H = horizontal component of T at support
- ΔL = increase in length of cable due to T
- Δf = increase in sag of cable due to superimposed loads

It is assumed that the uniformly distributed load acts vertically and that the supports at each end of the cable are on the same horizontal line.

$$L \text{ of the cable} \quad L = l \left[1 + \frac{8}{3} \left(\frac{f}{l} \right)^2 \right] \quad (1)$$

$$\text{The tension } T \text{ is given by} \quad T = \frac{ql^2}{8f} \sqrt{1 + 16 \left(\frac{f}{l} \right)^2} \quad (2)$$

$$\text{The approximate elastic elongation of the cable is} \quad \Delta L = \frac{TL}{EA} \quad (3)$$

$E = 10,500 - 16,000 \text{ kg/mm}^2$

$$\text{The increase in sag is} \quad \Delta f = \frac{\Delta L}{\frac{16}{15} (f/l) [5 - 24 (f/L)^2]} \quad (4)$$

$$\text{The angle } \alpha \text{ is given by} \quad \tan \alpha = \frac{4(f + \Delta f)}{l} \quad (5)$$

$$\text{The vertical and horizontal} \quad V = T \sin \alpha \quad (6)$$

$$\text{reactions are} \quad H = T \cos \alpha \quad (7)$$

Reference : Structural Engineering Handbook : Edwin H. Gaylord, jr.
(McGraw-Hill Book Company) Charles N. Gaylord

SINGLE CABLE UNDER UNIFORMLY DISTRIBUTED LOAD (level span) continuation




The figure below shows a suspended cable at rest (a), of any geometric configuration, with any assumed tension T. If the cable is plucked (for example, to the configuration in b and then released, it will vibrate. During such vibration it will assume various configurations. At some instant, it may assume a shape such as shown in Fig. c, which varies from instant to instant, depending on the manner of plucking as well as on the properties of the cable and its initial tension. Whatever configuration the cable has at any instant can be represented by a summation of the ordinates of an infinite number of harmonic curves, the first three of which are shown in d, e, and f. Each harmonic has different amplitude, e.g., $a_1, a_2, a_3, \dots, a_n$.

Dynamic Behavior. Additional notations are

- q = uniformly distributed load.
- g = acceleration of gravity (9.81m/Sec²).
- n = any integer.
- W_n = frequency of vibration of a harmonic.

$$W_n = \frac{n\pi}{l} \sqrt{\frac{T}{q/g}}$$

The amplitudes are so prescribed that their summation results in the exact value of the ordinate of the actual configuration shown in c. The number of harmonics, and the amplitude of each, necessary to represent the configuration depends on the specific problem. It should be realized that each harmonic is not an imaginary component of a vibrating cable but is a physical entity. It should also be noted that the amplitude of each harmonic changes as the cable vibrates. Each component harmonic is called a mode vibration. The frequency of change of amplitude (i.e., the number of times per second that each harmonic assumes its maximum positive and negative amplitudes) is called a natural frequency of the cable. Thus, a cable can have an infinite number of natural frequencies. The larger the number of waves in the mode the smaller the amplitude and the larger the frequency. Thus, from a practical viewpoint, the first few harmonics are sufficient to represent a vibrating cable. The first harmonic is called the fundamental mode of vibration and its frequency the natural frequency. One approach in designing suspension structures is to stay outside the range ab of the Fig. below middle. This can be made by increasing the mass q/g. The Fig. in the right below corner indicates the frequencies of the standard suspension and suspended bridges. It is easy understandable that the suspended bridge is stiffer than the suspension bridge.

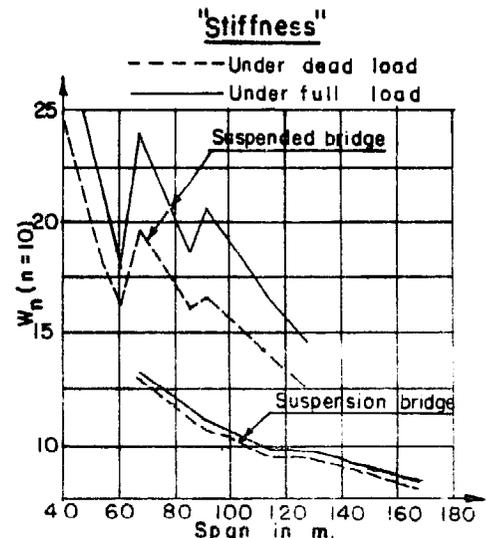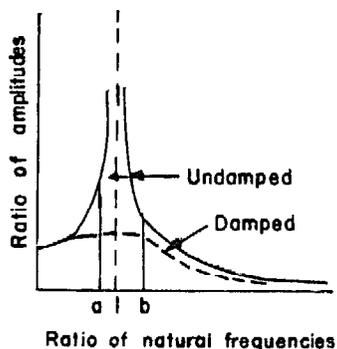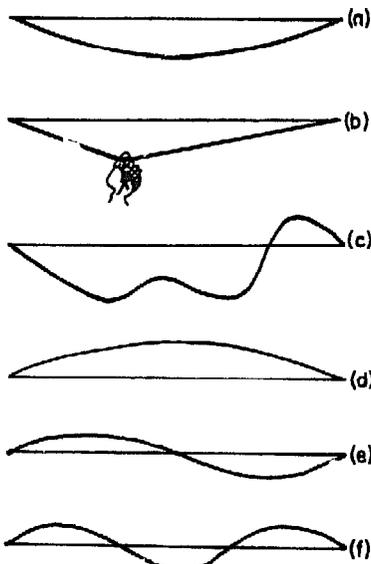

Reference : Structural Engineering Handbook (McGraw-Hill Company) 1968


Single cable under uniformly distributed load, example
with graphical method

Date : 14th Febr. 77

Sig : *[Signature]*

Given: Suspended bridge, span 120m, cable sag (full loaded) = 6.90 m, loading uniform, dead load 120Kg/m + live load 460 Kg/m = total load 580 Kg/m.

To find: Force T in the main cables, diameter and number of cables.

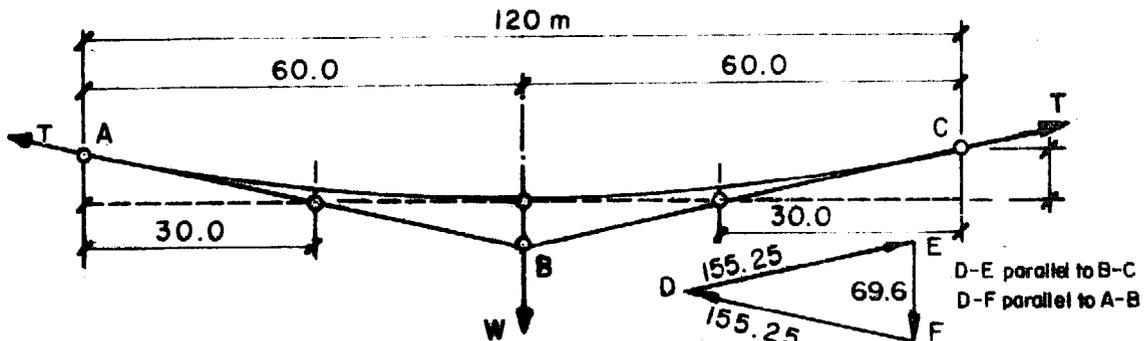

Procedure

1. Calculate total weight of the bridge
 $W = 0.58 \text{ tons/m} \times 120\text{m} = 69.60\text{tons}$.
2. Support the weight W by the 2 forces T at either end of the cable.
3. Determine the forces T graphically with the force diagram.
4. Using $\phi 1\frac{1}{2}$ " 6 x 19 (12/6/1) with W.S.C, breaking load 77 tons, factor of safety against rupture 3, calculate:

$$\text{Number of cables} = \frac{\text{Force T} \times \text{Safety factor}}{\text{Breaking load of 1 cable}} = \frac{155.25 \times 3}{77} = 6.04$$

If in this case 6 cables are used, the factor of safety is reduced to 2.98 which would be acceptable. Total cable weight per meter = $6 \times 5.53 = 33.18 \text{ kg/m}$

5. Alternative Solution

Using Bridge Wire ($\phi 5\text{mm}$) Required for equivalent strength, breaking strength 160 Kg/mm^2 .

Allowable Strength 72 Kg/mm^2 (German Standard)

Area 19.6 mm^2 Weight per Wire 0.154 Kg/m

Allowable force per Wire = 1.41 t

Force = 155.25 tons


$$\text{Number of Wires required} = \frac{\text{Total Force}}{\text{Allowable force}} = \frac{155.25}{1.41} = 110.106$$

Say 112 Wires of $\phi 5\text{mm}$ (56 Wires on each side)

(Total wire weight per m = $112 \cdot 0.154 = 17.248 \text{ kg/m}$)

SINGLE CABLE UNDER UNIFORMLY DISTRIBUTED LOAD(INCLINED SPAN)

The suspended walkway has however the advantage, that no extra problems crop up should the anchor block have to be placed at different heights. The layout of the wind guy cable sometimes calls also for an inclined parabola system.

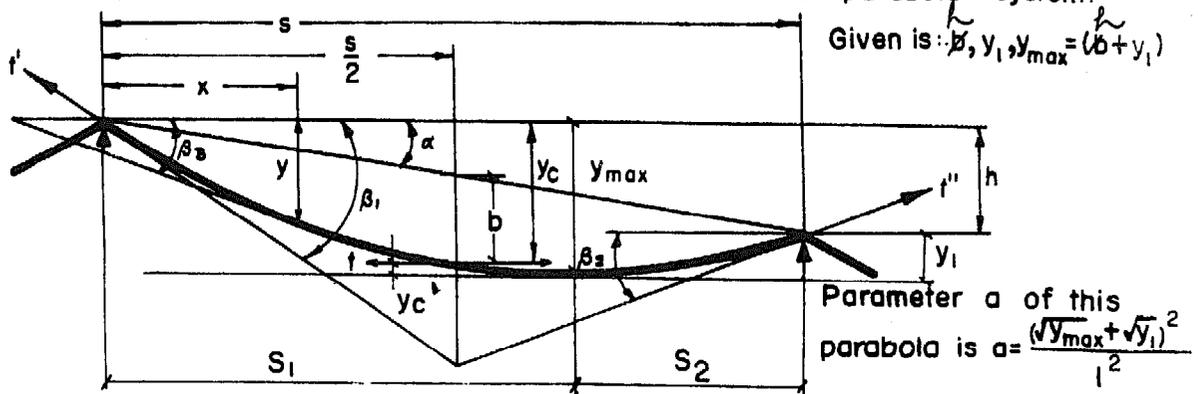

The following formulas give increments of deflection and slope due to inclination of the chord.

"Down" slopes are usually considered as plus values and "Up" slopes as minus values.

$$y_c = \left(\frac{ws^2}{8t} \right) + \frac{h}{2}$$

$$S_1 = \sqrt{\frac{y_{max}}{a}} ; S_2 = \sqrt{\frac{y_1}{a}}$$

$$\tan \alpha = \frac{h}{s}$$

$$y'_c = a \left(S_1 - \frac{s}{2} \right)^2$$

At any point — $y = \frac{wx(s-x)}{2t} \pm x \tan \alpha$

$$y_c = y_1 - y'_c + h$$

$$\tan \beta_1 = \frac{ws}{2t} + \tan \alpha ; \quad \tan \beta_2 = \frac{ws}{2t} - \tan \alpha$$

$$b = y_c - \frac{h}{2}$$

$$\tan \beta_3 \text{ (at any point) } = \frac{w}{t} \left(\frac{s}{2} - x \right) \pm \tan \alpha$$

$$t = \frac{ws^2}{8b}$$

When center deflection is known: $t = \frac{ws^2}{8y_c - 4h}$

Low point of an inclined span occurs when $\tan \beta_3 = 0, \therefore x = \frac{s}{2} + \frac{t}{w} \tan \alpha$

When deflection at any other point is known:

$$t = \frac{wx(s-x)}{2(y-x \tan \alpha)}$$

$$t' = t \sec \beta_1, \quad t'' = t \sec \beta_2$$

The lengths of cable in an inclined span is given by the formulas:

$$L_1 \text{ or } L = \sqrt{s^2 + h^2} + \frac{w^2 s^3 \cos^3 \alpha}{24 t^2} \text{ (approx); } L_1 \text{ or } L = \sqrt{s^2 + h^2} \left(1 + \frac{8}{3} k^2 - \frac{32}{5} k^4 + \frac{256}{7} k^6 \right)$$

$$K = \text{Ratio of deflection} = \frac{w \cdot s \cdot \cos^2 \alpha}{8 \cdot t}$$


Single cable under concentrated single load (level span)

Date : 14th Febr. 77

e.g. cable car

Sig : *[Signature]*

SINGLE CABLE UNDER CONCENTRATED SINGLE LOAD e.g CABLE CAR (LEVEL SPAN) (SIMPLIFIED CALCULATION)

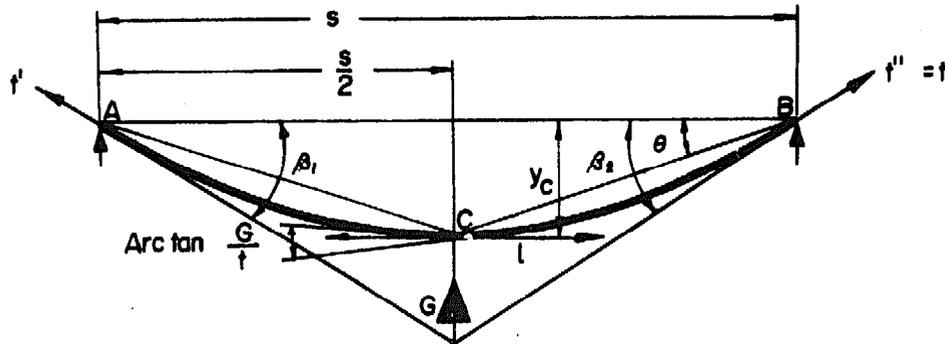

The deflection produced by a concentrated load suspended midway between two fixed points A and B forms two equal sub-chords AC and CB. The cable assumes two catenary arcs which intersect at C. The following formulas are, however, based on the parabola, as the difference in results is negligible.

The center deflection is found from :

$$y_c = \frac{Gs}{4t} + \frac{ws^2}{8t} = \frac{s(2G + ws)}{8t} \quad (1) \quad \text{and } t = \frac{s(2G + ws)}{8y_c} \quad (2)$$

$$t' = t \sec \beta_1 = t \sec \beta_2 = t'' \quad (3) \quad \tan \beta_1 = \frac{G + ws}{2t} = \tan \beta_2 \quad (4)$$

Example

A rolling load weighing 600 Kg is to be supported in a level span 100m long by a cable anchored at both ends. The deflection must not exceed 3m. No wind or ice conditions.

Since this is a level span, $\alpha = 0$ and $w = w'$

$W = 2.46$ kg per m

$$\text{From (2)} \quad t = \frac{100(2 \times 600 + 2.46 \times 100)}{8 \times 3} = 6.025 \text{ Kg}$$

a) From (3) $t' = 6.025 \times 1.0025 = 6.040$ Kg

b) From (4) $\tan \beta_1 = \frac{600 + (2.46 \times 100)}{2 \times 6025} = 0.0702 \quad \beta_1 = 4.02^\circ$

$$\text{Factor of safety} = \frac{\text{Breaking load}}{\text{max. tension}} = \frac{25.000}{6.040} = 4.14 > 4.0$$

The maximum cable length occurs when load is at center of span

$$s_1 = \sqrt{\left(\frac{s}{2}\right)^2 + y^2} = \sqrt{50^2 + 3^2} = 50.0899 \text{ m} \quad \tan \theta = \frac{3}{50} = 0.06 \quad \theta = 3.43^\circ$$

$$L = 2 \left(s_1 + \frac{w^2 \left(\frac{s}{2}\right)^3 \cos^3 \theta}{24 t^2} \right) = 2 \left(50.0899 + \frac{2.46^2 \times 50^3 \times \cos^3 3.43^\circ}{24 \times 6025^2} \right) = 100.18 \text{ m}$$

We assume the elongation due to load as 0.15% .

$$\text{The hoisting (erection) length of the cable: } \Delta l = \frac{0.15 \cdot 100.18}{100} = 0.15 \text{ m}$$

Single cable under concentrated load (level span)

Date : 14th Febr. 77

e.g. cable car (continuation)

Sig : *As R.H.*c) Length (hoisting) = $100.18 - 0.15 = 100.03$ m

$$y_{\text{Hoisting}} = \sqrt{\frac{\text{span} \cdot 3(\text{cable length} - \text{span})}{8}} = \sqrt{\frac{100 \cdot 3(100.03 - 100.00)}{8}} = 1.06 \text{ m}$$

$$\tan \alpha = \frac{4 \cdot 1.06}{100} = 0.0424 \quad \alpha = 2.43^\circ$$

d) Tension during hoisting (erection)

$$T_{\text{Hoisting}} = \frac{s^2 \cdot w}{8 \cdot y_H} \cdot \sec \alpha = \frac{100^2 \cdot 2.46}{8 \cdot 1.06} \cdot 1.0009 = 2904 \text{ Kg} \quad \left(\sec \alpha = \frac{1}{\cos \alpha} \right)$$


e) Tension when the cable car hangs 5 m in front of one support

Knowing the tension t at the center of the span, the deflection at other points may be determined from:

$$y = \frac{x(ws + 2G)^2(s-x)}{2t(ws^2 + 4G)\sqrt{x(s-x)}} = \frac{95(2.46 \cdot 100 + 1200) \cdot 5}{2 \cdot 6025(2.46 \cdot 100^2 + 2400)\sqrt{95 \cdot 5}} = 1.074 \text{ m}$$

However it must be understood this formula will only give approximate results, as it is based on constant cable length, neglecting the elastic properties of the cable.

After determining the deflection for any position of the load, the corresponding approximate tension at xy can be found.

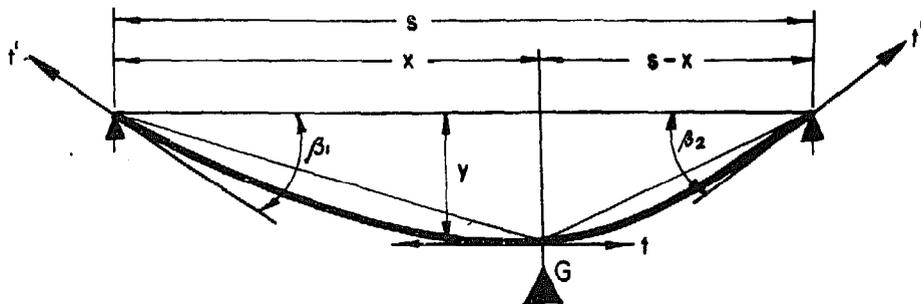

$$t'' = \frac{x(s-x)(ws + 2G)}{2sy} = \frac{95 \cdot 5(2.46 \cdot 100 + 2 \cdot 600)}{2 \cdot 100 \cdot 1.074} = 3198 \text{ Kg}$$

$$\tan \beta_2 = \frac{G + w \cdot s}{2 \cdot t} = \frac{600 + 2.46 \cdot 100}{2 \cdot 3198} = 0.1323 \quad \beta_2 = 7.54^\circ$$

f) Required force to pull the cable car (when hanging 5 m toward the support) factor of friction between 'cable and roller bearing of the car' = 0.03

$$\text{Required pulley force} = \Sigma V (\sin \beta_2 + \mu \cdot \cos \beta_2)$$


$$R = 600 \text{ Kg} (\sin 7.54^\circ + 0.03 \cdot \cos 7.54^\circ)$$

$$= 96.58 \text{ Kg}$$


$$\text{Say } 100 \text{ Kg}$$

EXAMPLE FOR A STATICAL CALCULATION OF AN UNSTIFFENED SUSPENSION BRIDGE OF 60 M SPAN


Sketches

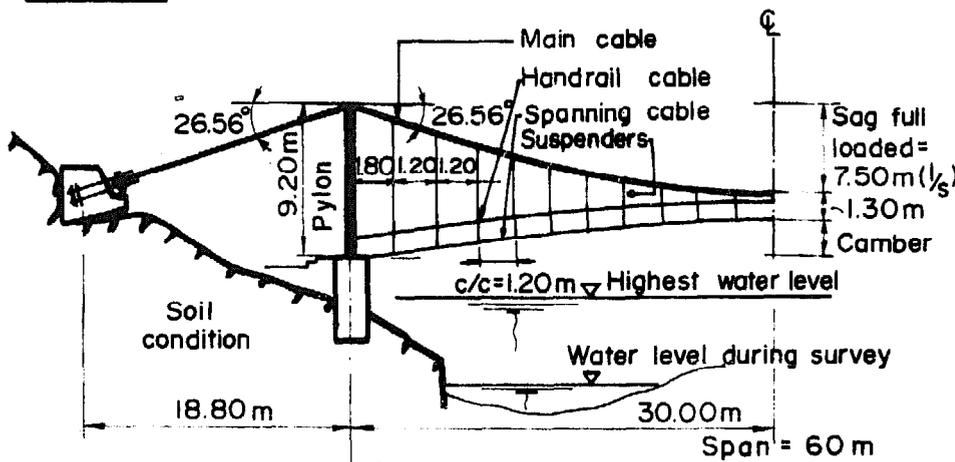

WALK - WAY

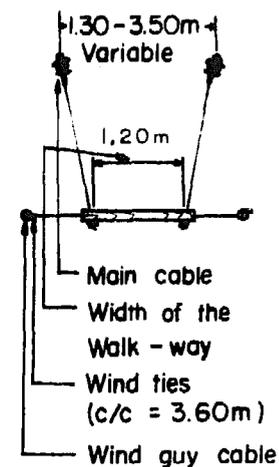

SIDE ELEVATION

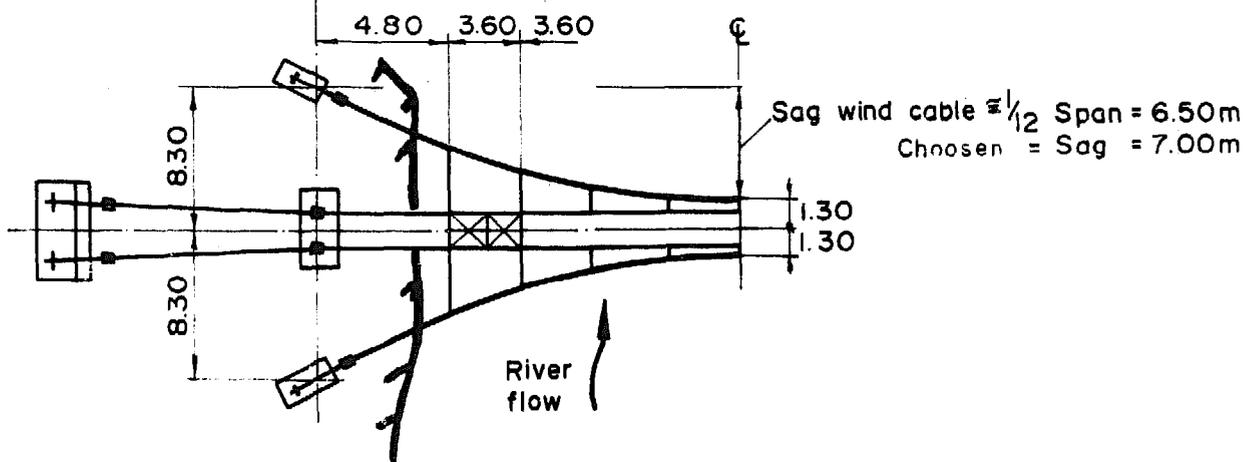

PLAN

System

Span $L = 60.00 \text{ m}$

Walk-way width = 1.20 m

$$\text{Sag } f = \frac{\text{Span}}{8} = \frac{60}{8} = 7.50 \text{ m}$$

$$f_H = \frac{\text{Width of pylon} - \text{Width of walk-way}}{2} = \frac{3.50 - 1.20}{2} = 1.15 \text{ m} > \frac{\text{Span}}{100}$$

Length of main cable (between pylons) L_c

$$L_c = L \cdot \rho$$

$$\text{Where } \rho = 1 + \frac{8}{3} \left(\frac{\text{Sag}}{\text{Span}} \right)^2 - \frac{32}{5} \left(\frac{\text{Sag}}{\text{Span}} \right)^4$$

$$\rho = 1 + \frac{8}{3} \left(\frac{7.5}{60} \right)^2 - \frac{32}{5} \left(\frac{7.5}{60} \right)^4$$

$$\rho = 1 + 0.04166 - 0.0015625 = 1.04010416$$

$$L_c = L \cdot \rho = 60 \text{m} \cdot 1.04010416 = 62.406 \text{m}$$

(middle span only) for full load case.

Loading Cases.

(a) Dead load of the bridge = 120 kg/m'

(b) Uniformly distributed live load = 400 kg/m² [480 kg/m']

Wind: Wind load = 150 kg/m²
(i.e. for exposed area = 100 kg/m')

Construction materials

Cable 6 × 19 (12/6/1) with W. S. C. (Wire Strand Core)

Tensile Strength of wire 160 kg/mm²

∅ mm	Breaking load tons	Area mm ²
6.3	2.30	14.38
8.0	3.40	21.25
20.0	21.20	132.50
32.0	54.40	340.00
38.0	77.00	481.00
Open thimbles (IS 2315-1963)		
Bulldog grips (IS 2361-1970)		


Calculation example for a suspension bridge
(2nd continuation)

Date : 14th Febr. 77

Sig : *[Signature]*

Walk-way with Wooden deck

System:



6 Plan ks 5/19 cm

(dead load = 49 kg/m')

Loading Case 1.

Uniformly distributed load = 480 kg/m'

Dead load = 49 kg/m'

Total load W = 529 kg/m

Bearing reaction = $0,6 \cdot 0,529 = 0,3174 t$

Bending moment = $\frac{W \cdot S^2}{8} = \frac{0,529 \cdot 1,2^2}{8} = 0,09522 \text{ mt}$

Modulus of section = $\frac{6(19 \cdot 5^2)}{6} = 475 \text{ cm}^3$

Sectional area = $6(19 \cdot 5) = 570 \text{ cm}^2$

$\sigma_{\text{Bending}} = \frac{9522}{475} = 20,05 \text{ kg/cm}^2 << \sigma_{\text{Permissible}}$

$\tau_{\text{Vorh}} = \frac{S \cdot 3}{F \cdot 2} = \frac{317,4 \cdot 3}{570 \cdot 2} = 0,835 \text{ kg/m}^2 << \tau_{\text{Permissible}}$

Loading Case 2.

Single load of 100 kg on one Plan k


dead load of one Plan k = 8.075 kg/m'

$M_{\text{max.}} = \frac{0,0081 \cdot 1,2^2}{8} + \frac{0,100 \cdot 1,2}{4} = 0,031458 \text{ mt.}$

$\sigma_{\text{max.}} = \frac{3145,8}{475} = 6,62 \text{ kg/cm}^2 << \sigma_{\text{Permissible}}$

Calculation example for a suspension bridge
(3rd continuation)

Date : 14th Febr. 77

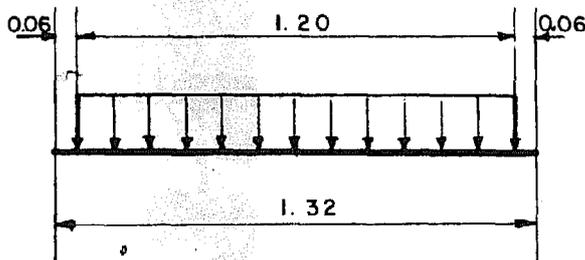Sig : *Ja P.H.K.*Cross beam

$$\text{Load} = 529 \text{ kg} \cdot 1.2 = 634.8 \text{ kg}$$

Weight of the Cross beam

$$2L \ 65/65/5 = 2 \cdot 4.9 \text{ kg/m} = 9.8 \text{ kg/m}$$

Loading Case 1.

$$M_{\text{max.}} = (1.2 \cdot 0.6348 \cdot 0.5 \cdot 0.66) - (0.6 \cdot 0.6348 \cdot 0.3) + \frac{(0.0098 \cdot 1.32^2)}{8}$$

$$M_{\text{max.}} = 0.2514 - 0.1143 + 0.0029 = 0.1392 \text{ mt}$$

Moduli of Section (I.L) $Z_{xx} = Z_{yy} = 5.2 \text{ cm}^3$; $A = 6.25 \text{ cm}^2$

$$\sigma_{\text{max.}} = \frac{13920}{2 \cdot 5.2} = 1338 \text{ kg/cm}^2 < 1650 \text{ kg/cm}^2$$

$$\tau \cong \frac{0.6 \cdot 634.8 + 9.8 \cdot 0.66}{(6.5 - 0.5) \cdot 0.5} = \frac{380.88 + 6.488}{(6.5 - 0.5) \cdot 0.5} = 129.116 \text{ kg/cm}^2$$

Loading Case 2.

Single load of 100 kg + dead load.

$$M_{\text{max.}} = (1.2 \cdot 0.049 \cdot 0.5 \cdot 0.66) - (0.6 \cdot 0.049 \cdot 0.3) + \frac{0.0098 \cdot 1.32^2}{8} + \frac{0.100 \cdot 1.2}{4}$$

$$M_{\text{max.}} = 0.019404 - 0.00882 + 0.00213 + 0.03 = 0.042714 \text{ mt}$$

$$\sigma_{\text{max.}} = \frac{4271.4}{2 \cdot 5.2} = 410.71 \text{ kg/cm}^2$$

$$\tau \cong \frac{0.5 \cdot 100 + 0.66 \cdot 9.8}{(6.5 - 0.5) \cdot 0.5} = 18.82 \text{ kg/cm}^2$$

$$\text{Comparison Stress } \sigma_c = \sqrt{411^2 + 3 \cdot 19^2} = 412 \text{ kg/cm}^2 \lll 1400 \text{ kg/cm}^2$$

Suspenders

Weight to be carried by the Suspenders:

- Weight of Wind Cables
- Weight of Wind ties
- Weight of Walk—Way
- Vertical reaction due to Prestressed Spanning Cable
- live load

$$\text{Total load} \cong 600 \text{ kg/m'}$$

$$\text{I. Load on One Suspender} = \frac{600 \cdot 1.2}{2} = 360 \text{ kg.}$$

Suspender rods of ϕ 13 mm (1.327 cm^2) are used.

$$\sigma_{\text{tension}} = \frac{360}{1.327} = 271.3 \text{ kg/cm}^2 < 1400 \text{ kg/cm}^2$$

During erection work a load of about 1000kg might be suspended on one Suspender

$$\sigma_{\text{erection}} = \frac{1000}{1.327} = 753.6 \text{ kg/cm}^2 < 1400 \text{ kg/cm}^2$$

Calculation example for a suspension bridge
(4th continuation)


Date : 14th Febr. 77

Sig : *[Signature]*

Main Cable

Span = 60m

Sag = $\frac{\text{Span}}{8} = 7.50$ (full load sag)

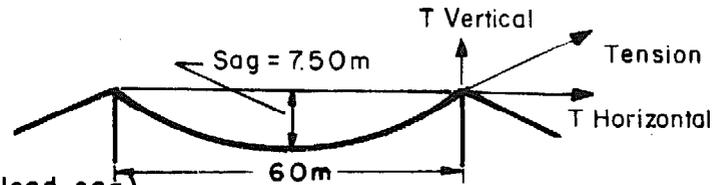

We choose 2 Cables of $\phi 1\frac{1}{2}''$ (38mm) 6x19 (12/6/1) with W. S. C. having a breaking load of 77 tons.

Loading Cases

Hoisting = $2 \cdot 4.06 \text{ kg/m}^1 = 8.12 \text{ kg/m}^1$
 Dead load = 120 kg/m¹
 Full load $W_f = 600 \text{ kg/m}^1$

Max. Cable Tension

$$T = \sqrt{T_H^2 + T_V^2}$$

$$T_H = \frac{W_f \cdot \text{Span}^2}{8 \cdot \text{Sag}} = \frac{0.600 \cdot 60^2}{8 \cdot 7.5} = 36 \text{ tons}$$

$$T_V = \frac{W_f \cdot \text{Span}}{2} = \frac{0.6 \cdot 60}{2} = 18 \text{ tons}$$

$$T = \sqrt{36^2 + 18^2} = \sqrt{1296 + 324} \cong 40.25 \text{ tons}$$

Safety factor of the two main Cables:

$$\text{S.F.} = \frac{\text{No. of Cables} \times \text{breaking load}}{\text{max. tension}} = \frac{2 \cdot 77}{40.25} = 3.83 > 3.0$$


Temperature

$$\Delta \text{ length}_c = L_c \cdot \alpha_f \cdot \Delta t$$

$$L_c = 62.406 \text{ m}$$

$$\alpha_f = 0.000012$$

$$\Delta t = -10^\circ \text{C}$$

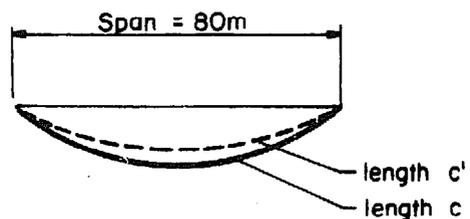

$$\Delta L_c = 6240.6 \cdot 0.000012 \cdot (-10^\circ) = -0.749 \text{ cm}$$

$$L_{c'} = L_c + \Delta L_c = 6240.6 + (-0.749) = 623985.1 \text{ cm}$$


Increasing of the span

$$\text{Span } S' = \text{Span} + 2 \Delta \text{Span}$$

$$\Delta \text{Span} = l \cdot \alpha_t \cdot \Delta t$$

$$\Delta l = 1880 \cdot 0.000012 \cdot 10 = 0.2256 \text{ cm}$$

$$\text{Span } S' = 6000 + 2 \cdot 0.2256 = 6000.4512 \text{ cm}$$

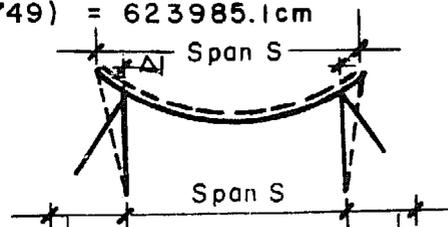

S.A.T.A., Swiss Association for Technical Assistance

Calculation example for a suspension bridge
(5th continuation)

Date : 14th Febr. 77

Sig : *P. P. P.*Decreasing of the Sag

$$\rho' = \frac{L_c'}{S'} = \frac{6239.851}{6000.4512} = 1.039897$$

$$X = \left(\frac{\text{Sag}'}{S'} \right)^2$$

$$1 + \frac{8}{3} \cdot X - \frac{32}{5} X^2 = 1.039897$$

$$6.4 X^2 - 2.666 \cdot X + 0.039897 = 0$$

$$X = \frac{2.666 \pm \sqrt{2.666^2 - 4 \cdot 6.4 \cdot 0.039897}}{2 \cdot 6.4} \text{ cm}$$

$$X_1 = 0.4010173 \text{ cm (absurd)}$$

$$X_2 = 0.015545 \text{ cm (possible)}$$

But

$$X_2 = \left(\frac{\text{Sag}'}{S'} \right)^2$$

$$\text{Sag}' = S' \cdot \sqrt{X_2} = 6000.4512 \cdot \sqrt{0.015545} = 748.133792 \text{ cm}$$

$$\Delta \text{ Sag} = \text{Sag} - \text{Sag}' = 750 - 748.133792 \cong 1.87 \text{ cm}$$

Increasing of the force T_H

$$\Delta T_H = T_H \left(\frac{\text{Sag}}{\text{Sag}'} - 1 \right) = 36 \left(\frac{750}{748.134} - 1 \right) = 0.091/10^\circ \text{C}$$


If we assume $\Delta t = 30^\circ \text{C}$

$$T_H = 36 + 3 \cdot 0.09 = 36.27 \text{ tons}$$

$$T_V = 18 \text{ tons}$$

$$\text{Max. tension} = \sqrt{36.27^2 + 18^2} = 40.491 \text{ tons}$$

$$\text{Factor of Safety} = \frac{2.77}{40.491} = 3.80 > 3.0$$

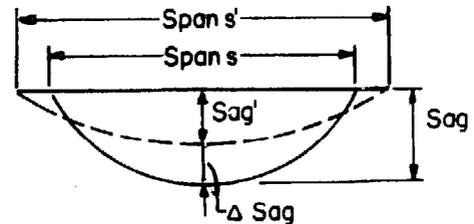

Vertical reaction on the Pylon (V)

$$T = 40.25 \text{ tons}$$

$$C = \sqrt{(2 \cdot \text{Sag})^2 + \left(\frac{\text{Span}}{2}\right)^2}$$

$$C = \sqrt{(2 \cdot 7.5)^2 + \left(\frac{60}{2}\right)^2}$$

$$C = 33.541$$

$$\cos \alpha = \frac{2 \cdot \text{Sag}}{C} = \frac{2 \cdot 7.5}{33.541} = 0.4472$$

$$Z = T \cdot \frac{\sin \alpha}{\sin \beta}$$

$$V = T \cdot \cos \alpha + Z \cdot \cos \beta$$

When $\beta < \alpha$, the force Z is higher than the force T

In our case $\alpha = \beta$

$$Z = T = 40.25 \text{ tons}$$

$$V = 2 \cdot T \cdot \cos \alpha = 2 \cdot 40.25 \cdot 0.4472 = 35.9996 \approx 36 \text{ tons}$$

Due to the hinge bearing the horizontal forces H_1 and H_2 must be equal.

$$H_1 = H_2$$

$$\tan \alpha = \frac{V}{H}$$

$$T_2 = \sqrt{V_2^2 + H_2^2} = \frac{H_2}{\cos \alpha}$$



$$T_1 = \frac{H_2}{\cos \beta} = \frac{T_2 \cdot \cos \alpha}{\cos \beta}$$

$$V_2 = T_2 \cdot \sin \alpha$$

$$V_1 = T_1 \cdot \sin \beta$$

$$V_1 = \frac{T_2 \cdot \cos \alpha \cdot \sin \beta}{\cos \beta}$$

$$V_1 = T_2 \cdot \cos \alpha \cdot \tan \beta$$

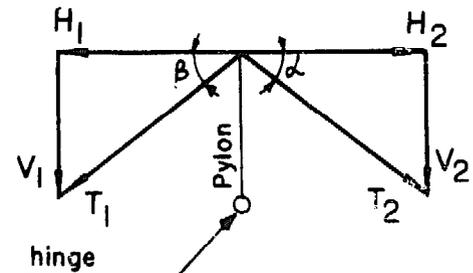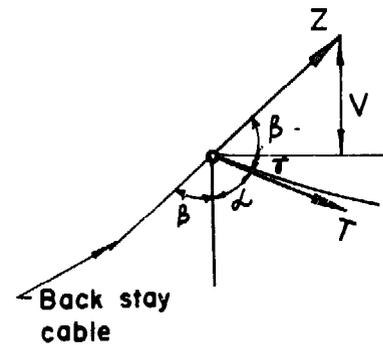

Wind guy Cable


Seg Wind guy Cable = 6.50m

Centre to centre Wind tie Cable = 3.60m

$$T_H = \frac{W \cdot S^2}{8 \cdot \text{Sag}} = \frac{0.1 \cdot 60^2}{8 \cdot 7.0} = 6.429 \text{ tons}$$

$$T_V = \frac{W \cdot S}{2} = \frac{0.1 \cdot 60}{2} = 3.00 \text{ tons}$$

$$T = \sqrt{T_H^2 + T_V^2} = \sqrt{6.429^2 + 3^2} = 6.66 \text{ tons}$$

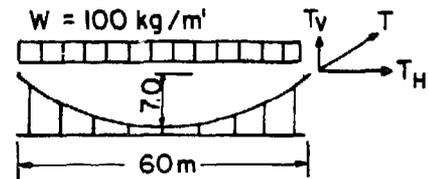For Cable ϕ 20mm (Breaking load = 21.20 tons),

$$\text{factor of Safety} = \frac{21.20}{6.66} = 3.18 > 3.0$$

For Wind ties ϕ 1/4" (Breaking load = 2.3 tons,

load on one Wind tie = 3.60 · 0.1 = 0.36 tons)

$$\text{factor of Safety} = \frac{2.3}{0.36} = 6.39 \gg 3.0$$

As the Wind ties are carrying also the Wind guy Cable they are subjected to greater forces.

$$\tan \alpha = \frac{50}{600} = 0.083 ; \quad \alpha = 4.76^\circ$$

$$\sin \alpha = 0.083 ; \quad \cos \alpha = 0.997 = 0.997$$

Tension in the inclined Wind ties

$$T_i = \frac{360}{\cos \alpha} + \frac{10}{\sin \alpha} = \frac{360}{0.997} + \frac{10}{0.083} = 361 + 120 = 481 \text{ kg}$$

$$\text{Factor of Safety} = \frac{2300}{481} = 4.78 > 3.0$$

The above Calculation are given just in the simplified form. For the Sags, which are also to be found out, for hoisting and dead load cases, refer to technical literatures. The different Sags for the Suspended and Suspension Bridges according to the HMG's Standard Designs are given in the Pages 2.303 and 2.403.

Calculation example for a three span suspension bridge
(main cables only)


Date : 14th Febr. 77

Sig : *H. H. H.*

STRUCTURAL ANALYSIS FOR A THREE SPAN BRIDGE

(a) Basic data


$$\begin{aligned}
 l_0 &= 80\text{m} & l_0 &= 210\text{m} \\
 \text{total length} & & & \\
 l &= 2 \cdot 80.0 + 210.0 = 370 \quad \left[\frac{\text{m}}{\text{m}} \right] \\
 g &= & &= 0.150 \quad \left[\frac{\text{t}}{\text{m}} \right] \\
 p &= 0.470 \cdot 0.8 = 0.380 \quad \left[\frac{\text{t}}{\text{m}} \right] \quad (\text{reduction due to wide span}) \\
 q &= g + p = 0.530 \quad \left[\frac{\text{t}}{\text{m}} \right] \\
 E &= 10.500 \quad \left[\frac{\text{kg}}{\text{m}^2} \right] \\
 a &= 481 \text{mm}^2 = 1 \text{ } \phi \text{ } 1\frac{1}{2}'' \\
 F_B &= 77\text{t} & \eta_{\text{min}} &= 3 \\
 w &= 5.5 \quad \frac{\text{kg}}{\text{m}}
 \end{aligned}$$

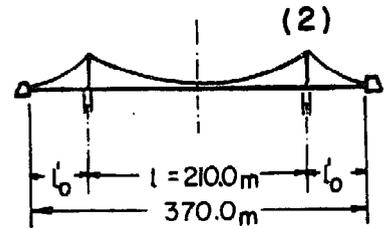

(b) Main Cable Force S_f

Full load sag for 210m Standard span according to H.M.G. Standard Design: 26.25m

Total weight of the 210m span structure: $0.530 \cdot 210 = 111\text{t}$

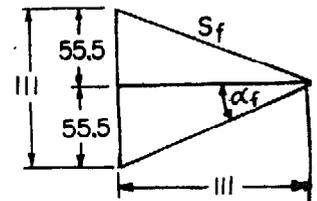

Factor of safety for the 210m span: $\frac{6 \cdot 77}{124} = 3.73 > 3.0 = \eta_{\text{required}}$

(c) Main Cable Force max. S_f

Side span: 80.0m


Total weight of the side span structure:

$$0.530 \cdot 80.0 = 42\text{t}$$

$$\text{max. } S_f = 127\text{t}$$

Factor of safety for the 80m span:

$$\frac{6 \cdot 77.0}{127} = 3.63 > 3.0 = \eta_{\text{required}}$$

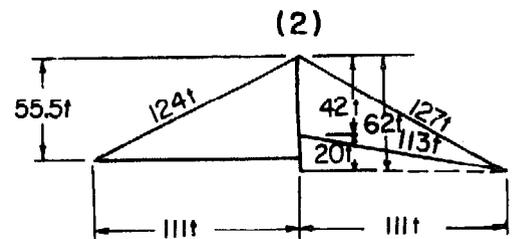

EXAMPLE OF STRUCTURAL CALCULATION FOR SUSPENDED BRIDGE

1. Basic data

Span	= 42m
Hoisting load	= 0.011 t/m'
Dead load	= 0.075 t/m'
Full load	= 0.500 t/m'
Modulus of elasticity	= 10 500 kg/mm ²
Cable cross section A	= 962 mm ² (2 Cables ϕ 1 1/2")
Breaking load B _L	= 2 x 77 = 154 tons
Factor of safety η	= 3.0

min

2. Allowable main Cable force

$$S_f = \frac{N \times B_L}{\eta_{\min}} = \frac{2 \times 77}{3} = 51.3 \text{ tons}$$

3. Full load sag

$$\sin \alpha_f = \frac{\text{full load} \times \text{span}}{2 \cdot S_f} = \frac{0.500 \cdot 42}{2 \cdot 51.3} = 0.20467$$

$$\alpha_f = 11.81^\circ \Rightarrow \tan \alpha_f = 0.2091$$

$$h_f = \frac{\text{Span} \times \tan \alpha_f}{4} = \frac{42 \cdot 0.2091}{4} = 2.196 \text{ m}$$

$$\text{Say, full load sag } h_f = 2.20 \text{ m}$$

4. Dead load sag

$$\sigma_f = \frac{S_f}{A} = \frac{51300}{962} = 53.326 \text{ kg/mm}^2$$

$$\sigma_{\text{dead}} = \frac{\text{dead load}}{\text{full load}} \cdot \sigma_f = \frac{0.075}{0.500} \cdot 53.326 = 8 \text{ kg/mm}^2$$

$$\text{Chosen } \sigma_d = 10.8 \text{ kg/mm}^2$$

$$\text{Sag}_{\text{dead}} < \text{Sag}_{\text{full load}}$$

$$\Delta \sigma = \sigma_f - \sigma_d = 53.326 - 10.8 = 42.526 \text{ kg/mm}^2$$

$$\Delta l = \frac{l_0 \cdot \Delta \sigma}{E} = \frac{42.31 \cdot 42.526}{10500} = 0.1793 \text{ m}$$

$$l_0 \cong S \cdot \left[\left\{ 1 + \left(\frac{\text{Sag}}{\text{Span}} \right)^2 \frac{8}{3} \right\} \right] = 42.307 \text{ m} \cong 42.31 \text{ m}$$

$$\Delta \text{ Sag} = \frac{3}{16} \cdot \frac{\text{Span}}{\text{Sag}} \cdot \Delta l = \frac{3}{16} \cdot \frac{42}{2.20} \cdot 0.1713 = 0.6132 \text{ m}$$

$$\underline{\text{dead load sag}} = 2.20 - 0.6132 = 1.586 \cong \underline{1.59}$$

5. Check of chosen $d = 10.8 \text{ kg/mm}^2$

$$\tan \alpha_d = \frac{4.1.59}{42} = 0.1514$$

$$\alpha_d = 8.6108^\circ \Rightarrow \sin \alpha = 0.14972$$

$$W_d = \frac{0.075 \cdot 42}{2 \cdot 0.14972} = 10.5196 \text{ tons}$$

$$\sigma_d = \frac{10520}{962} = 10.90 \text{ kg/mm}^2 \cong 10.8 \text{ kg/mm}^2$$

6. Hoisting sag

$$\sin \alpha_d = 0.14972 = \sin \alpha_{\text{hoisting}}$$

$$S_H = \frac{\text{Hoisting load} \cdot \text{Span}}{2 \cdot \sin \alpha} = \frac{0.011 \cdot 42}{2 \cdot 0.14972} = 1.5429$$

$$\sigma_H = \frac{S_H}{A} = \frac{1543}{962} = 1.6 \text{ kg/mm}^2$$

$$\Delta \sigma = 10.8 - 1.6 = 9.2 \text{ kg/mm}^2$$

$$l_d = 42.188 \text{ m}$$

$$\Delta l = \frac{42.188 \cdot 9.2}{10500} = 0.037$$

$$\Delta \text{Sag} = \frac{3}{16} \cdot \frac{\text{Span}}{\text{Sag}_d} \cdot \Delta l = \frac{3}{16} \cdot \frac{42}{1.59} \cdot 0.037 = 0.183 \text{ m}$$

$$\text{Sag}_H = \text{Sag}_d - \Delta \text{Sag} = 1.59 - 0.183 = 1.407$$

$$\text{Say, Sag}_H = 1.41 \text{ m.}$$


All values depend very much on the modulus of elasticity which may differ by about $\pm 20\%$

In the above calculation the cable lengths beyond the saddles are not taken into account.

SCIENCE CHART NO. 1 MECHANICS


तीन प्रकारका लिभरहरू

THREE KINDS OF LEVER

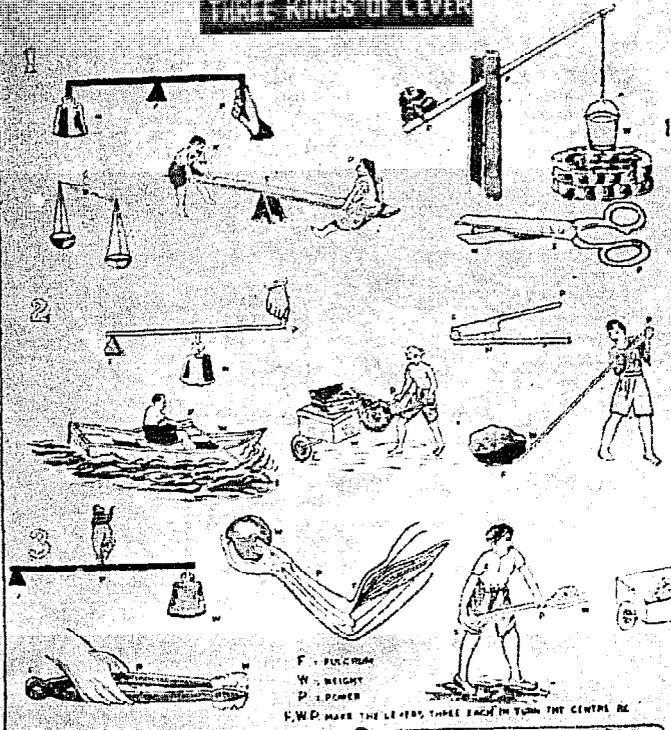


पुल्लिहरू

THE PULLEYS

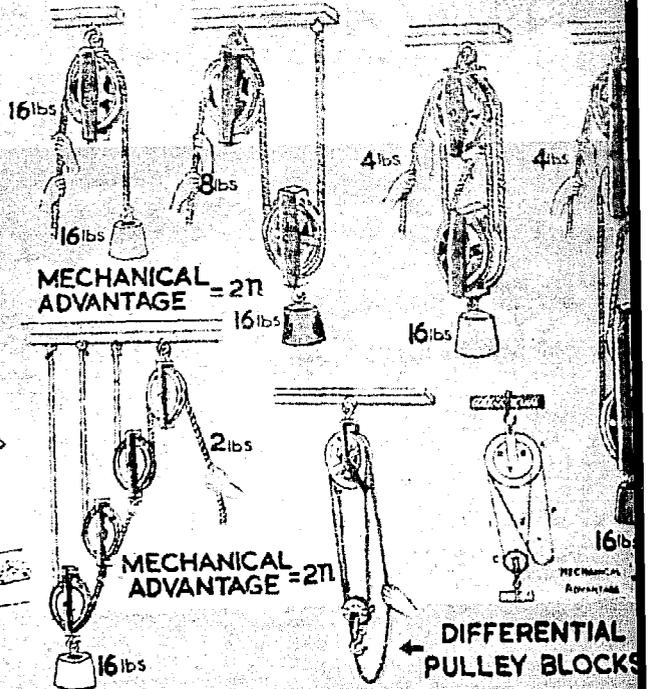


सन्तुलनका तीन अवस्थाहरू

THREE STATES OF EQUILIBRIUM

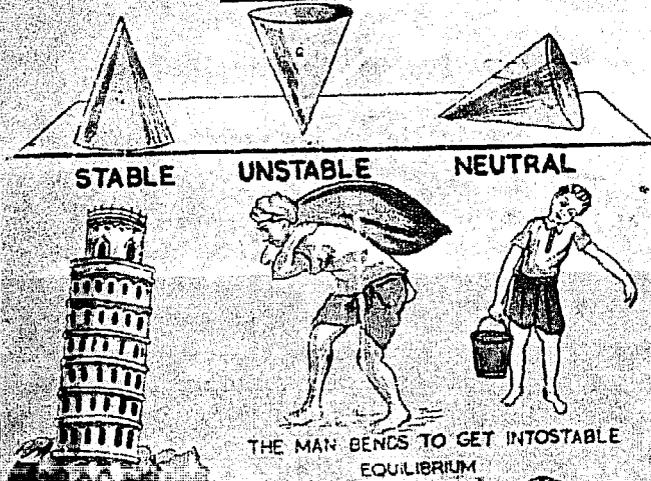

ढुल्लेको सतह

THE INCLINED PLANE

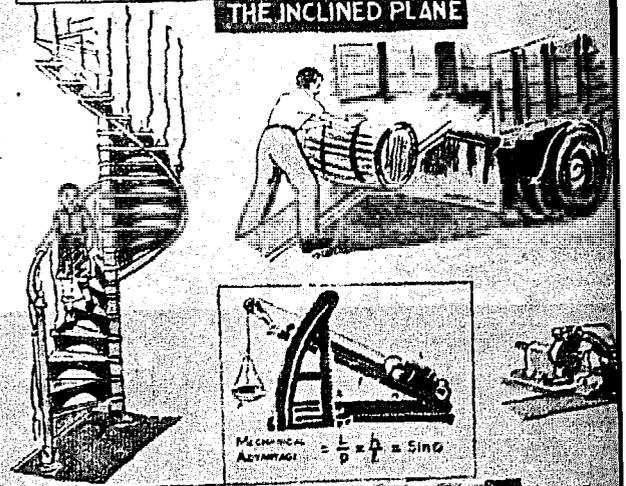

3. STRUCTURAL ANALYSES

SOILS AND SOIL INVESTIGATIONS

All buildings are founded on ground. It is, therefore, very necessary to study the structure and composition of the ground before going over the considerations of foundation. Soil mechanics is a branch of Engineering which studies the structure of the soil and its behaviour under loading and changing weather conditions. Material which are found in excavation are classified into two types : one is the soil, and the other, rock. Soils are formed by the disintegration and decomposition of rocks. It is an aggregate of mineral particles in loose condition, which can be easily separated by mechanical means. Rock, on the other hand, is a natural aggregate of minerals which are compounds of chemical elements consolidated under enormous pressure. The here given informations are very briefly. Some more information of how to investigate the soil conditions are given later in one of the chapter written by Leo Condrau, Civil Engineer with SATA.

Rocks are classified under three categories:

- Igenous Rocks
- Sedimentary Rocks
- Metamorphic Rocks

} Generally, rocks provide a very good foundation unless they are porous, or have fissures, or hollows etc.

Soils are four types according to the size of the grains or particels as shown below:

Gravel	Coarse	60 mm to 20 mm
	Medium	20 mm to 6 mm
	Fine	6 mm to 2 mm
Sand	Coarse	2 mm to 0.6 mm
	Medium	0.6 mm to 0.2 mm
	Fine	0.2 mm to 0.06 mm
Silt	Coarse	0.06 mm to 0.02 mm
	Medium	0.02 mm to 0.006 mm
	Fine	0.006 mm to 0.002 mm
Clay	0.002 mm
Colloidal clay	all sizes below 0.002 mm
Sizes above 60 mm are :					
Pebbles	60 mm to 200 mm
Boulders	larger than 200 mm

Source : A treatise on building construction by: Deshpande and Vartak, 1968

The foundation for bridges designed by HMG Roads Department (Suspension Bridge Division) are proposed in such a way to be easy and needing a simple execution work. However, it is important to check the foundation's condition at site proper, and, if necessary redesign the foundations.

Characteristics of Soils :

Gravel : Can be easily identified by the large size of its grains. It is not affected by frost, nor does it swell with addition of moisture nor shrinks with withdrawal of moisture. It has got no cohesion, but possesses good internal friction. Gravel has a high bearing capacity and thus forms a good foundation material.

Sand : like gravel, is coarse-grained. It is also not affected by frost. It lacks cohesion, but possesses high internal friction. Up to a certain percentage of moisture it swells or bulks. Sand forms a very good foundation material when it is pure and prevented from spreading under load. Generally sand found in building foundations is never pure but always mixed with clay and silt. Sand is very permable. Quicksand is not a soil type, but condition, which is caused by water occupying the pores in sand layer and thus reducing its power of resistance to loading.

- Silt** : Silts and clays, when dry, are identical in appearance but can be easily identified by their behaviour with water. Silt is not affected by moisture as far as plasticity is concerned, clay becomes sticky and plastic. Particles of silt cannot be seen with naked eye. It has no cohesion nor internal friction and is difficult to compact. Silt, when dry in form of a clod, can easily be pulverized between fingers. It sticks to fingers but can be readily dusted off.
- Clay** : is the finest type of soil. It is highly plastic and, thus, has a very low resistance to deformation. It possesses good cohesion, but no internal friction. It is compressible when just moist, but incompressible when wet. It is virtually impervious and difficult to drain by ordinary means. Dry clods of clay can be offering considerable high resistance to crushing.

BEARING CAPACITY OF SOILS

Excepting hard murum and rock, all soils are liable to sink. Every soil has got its own certain bearing capacity which denoted as so many tonnes per sq. metre (t/m²). If the load put upon it exceeds this limit, the soil yields by failure of shear indicated by its sinking. The maximum intensity of load that just causes sinking is called the ultimate bearing capacity of the soil. This capacity divided by a factor of safety of 2 or 3 gives the safe bearing capacity of that particular soil. The table below gives the safe bearing capacities of some soils as a rough guide. In the case of important buildings actual tests should be taken.

SAFE BEARING CAPACITIES OF DIFFERENT SOILS

Description of Soil	Safe Bearing Capacity in Tonnes/m ²	
1. Soft, wet, pasty or muddy clay, and marshy clay	.. 2	to 3.5
2. Alluvial deposits of moderate depths in river-beds	... 2	to 3.75
3. Diluvial clay in beds of rivers	... 3.75	to 11.00
4. Black cotton soil	... 5	to 10
5. Alluvial earth, loams, sandy loams (clay and 40 to 70 per cent of sand) and clay loams (clay and about 30 per cent of sand)	... 7.5	to 16
6. Moist clay	... 11	to 18
7. Compact clay, nearly dry	... 22	to 27
8. Solid clay mixed with very fine sand	... 44	
9. Dry, compact clay of considerable thickness	... 33	to 55
10. Loose sand in shifting river-beds, the safe load increasing with depth	.. 16	to 27
11. Silted sand of uniform and firm character in a river-bed secure from scour and at depths below 8 m	.. 38	to 44
12. Compact sand	... 22	to 33
13. Compact sand, prevented from spreading	... 55	to 82
14. Sandy gravel, or "kunkur"	... 22	to 33
15. Do, but compact, dry and prevented from spreading	... 44	to 65
16. Very firm, compact sand at a depth not less than 6.5 m and compact sandy gravel	... 65	to 75
17. Firm shale, protected from weather and clean gravel	... 65	to 85
18. Red earth	... 33	
19. "Muram"	... 44	
20. Compact gravel	... 75	to 95
21. Soft rock	... 45	
22. Residual deposits of shattered and broken bed rock and hard shale, cemented material	... 90	
23. Laminated rocks (e.g. sandstone and limestone) in sound condition	... 165	
24. Rocks—hard without lamination and defects e.g. granite, trap and diorite	... 330	

Noteworthy : e.g. 22 tonnes/m² is equal to 2.2 kg/cm²

Source : A treatise on building construction by : Deshpande and Vartak, 1968

EXCAVATION FOR FOUNDATIONS

The trenches for foundation of walls or piers should be excavated to exact width, length and depth, as shown on the drawings etc. The widths shown on the drawings are those at the bottom. If the soil is firm and the depth is not excessive, the sides of the excavation may remain vertical. This may be happen without support for a few days till concreting is done and masonry is raised to the ground level. But when the excavation is deep or the sides are not of firm soil, the sides must either be suitably sloped, or if left vertical, they must be supported by some arrangement of boarding, called timbering or shoring. The latter is necessary when the excavation adjoins a property line. Usually, when depth of excavation exceeds 2 m, shoring the sides is more economical. At the bridge sites in hill areas shoring might be the costlier way, because timber is expensive and the labour costs are low. The resident engineer should work out a proper comparison to choose the system which is cheaper. But also that depends upon the quality of the material to be excavated as well as on the slope of the escarpment where the foundation etc. have to be placed. If it is running sand, marsh, or morass, shoring will have to be resorted to almost from the surface of the ground. At the usual bridge sites there are soil conditions which are quite stabil, but, however, the resident engineer has to take care to the execution of the excavation work.

When the soil is of a clayey nature, which though firm, is likely to develop vertical cracks in the sides by exposure to the sun and wind, and slip, simple poling boards of size 20 cm x 4 cm are placed vertically in pairs, one on each side of the trench, and strutted apart by stout pieces of bullies about 10 cm in diameter called struts. But when the soil is looser, the poling boards must be placed closer together perpendicularly with walings 25 cm x 8 cm held horizontally against them on the inner side and strutted as before at intervals of about one meter.


On bridge sites with their foundations we are dealing with excavation work done without timbering or shoring. For some foundation types a trench foundation is to be done because the passive resistance has been taken into account. This kind of foundation is very economical, but, the surface of the soil around the foundations must be protected against erosion etc. The resident engineers should take the general arrangement and detail drawings into consideration by execution of the work.

INCLINATION OF SLOPE :

in a good stabil material depth : width = 3 : 1 or 4 : 1

in a medium stabil material = 2 : 1

in a rolling material = 1 : 1

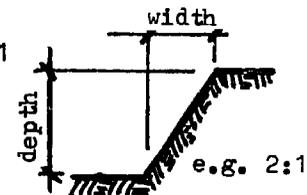

TRENCH TIMBERING (Earth pressure per kg/m², assuming horizontal ground level)

The chart can only be used for the calculation of the trench timbering. The earth pressure of retaining walls are different to such pressures acting on timbering.


	Type of soil		
	Stabil moraine soil moisture	Sand, gravel soil moisture	Sandy loams wet
Weight per cubic metre of the soil (t/m ³)	2.2 t/m ³	2.0 t/m ³	2.0 t/m ³
Angle of repose (of the natural slope)	42.5°	32.6°	25.0°
Coefficient of earth pressure	0.192	0.301	0.406
Excavation depth	Max. earth pressure per sq metre (kg/m ²)		
2.0	500	720	980
2.5	625	900	1225
3.0	750	1080	1470
3.5	875	1260	1715
4.0	1000	1440	1960

Sources : A treatise on building construction by : Deshpande and Vartak, 1968
Taschenbuch fuer Baufuehrer und Poliere: Buechel, Eng. ETH/SIA, 1965

PLACING OF FOUNDATION

Before construction of foundations on sloping ground, the stability of the slope itself must be investigated, footings should not be constructed on slopes which are unstable. The stability of a stable slope may be endangered by the addition of footings. Slopes failures which might arise should be proved with the well known different methods. To get more deeply into the matter of technologies the reference to the special books should be made—e.g. Wayne C. Teng: Foundation Design, 1974
H. Gaylord & N. Gaylord: Structural Engineering Handbook, New York, 1968

Placing of the foundation

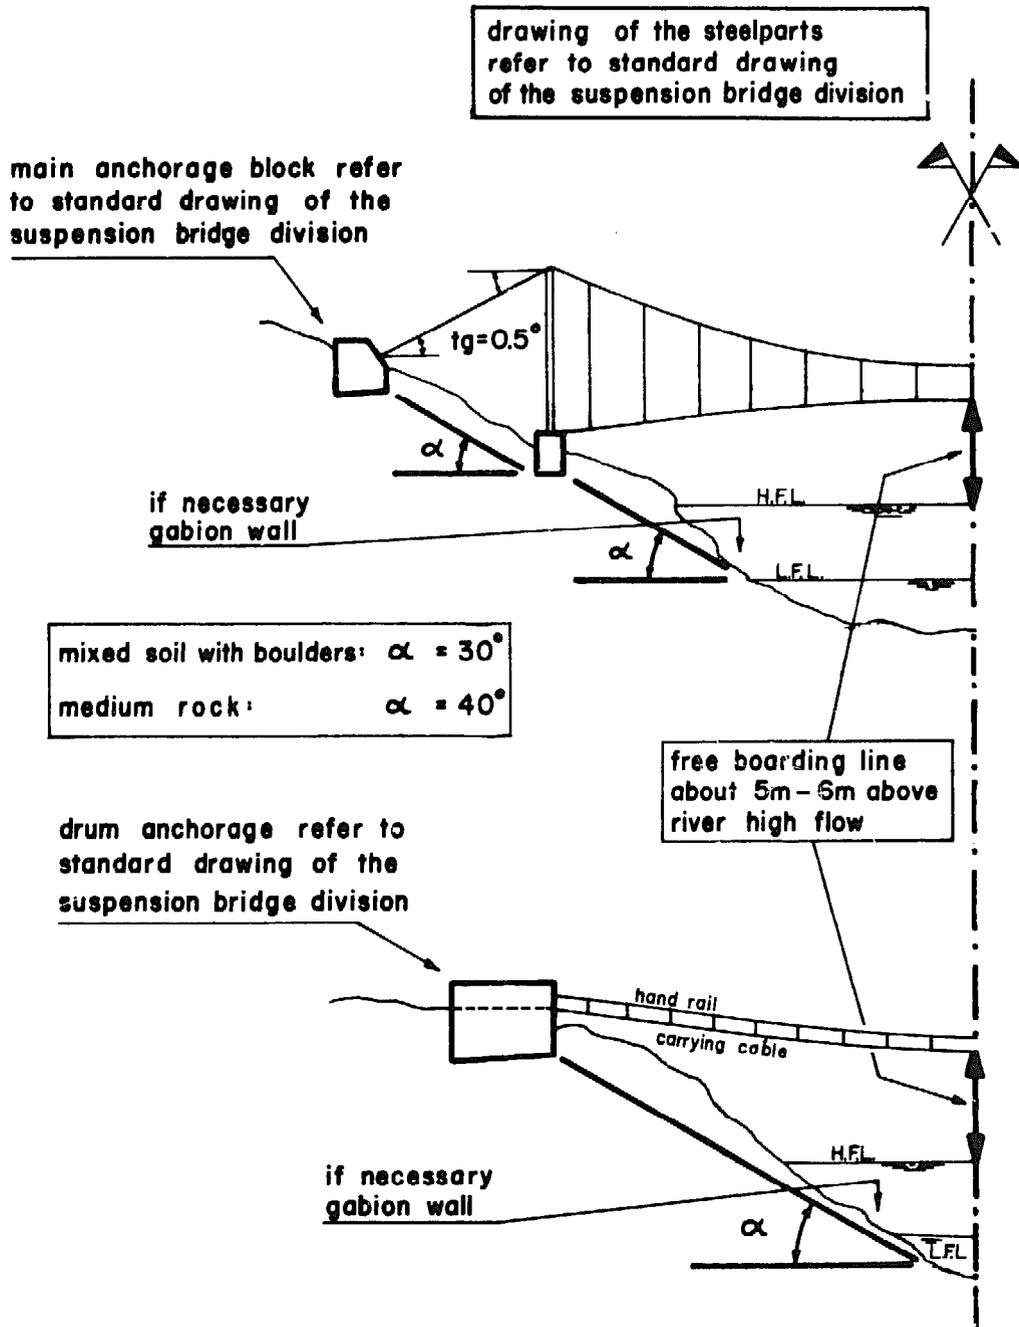

SAT A, Swiss Association for Technical Assistance

$\phi_u = 0$ analysis

Fig. 23.5 shows a slope AB , the stability of which is to be determined. The method consists in assuming a number of trial slip circles, and finding the factor of safety of each. The circle corresponding to the minimum factor of safety is the *critical slip circle*. Let AD be a trial slip circle, with r as the radius and O as the centre of rotation. Let W be the weight of the soil of the wedge $ABDA$ of unit thickness, acting through its centroid. The driving moment M_D will be equal to $W\bar{x}$, where \bar{x} is the distance of line of action of W from the vertical line passing through the centre of rotation. If c_u is the unit cohesion, and \widehat{L} = length of the slip arc $AD = \frac{2\pi r\delta}{360}$, the shear resistance developed along the slip surface will be equal to $c_u \widehat{L}$, which acts at a radial distance r from the centre of rotation O . Hence the resisting moment M_R will be equal to $r \cdot c_u \widehat{L}$.

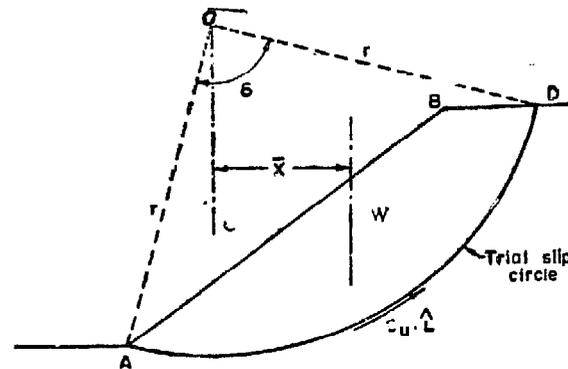


FIG. 23.5
 $\phi_u = 0$ analysis

The factor of safety F is then given by

$$F = \frac{M_R}{M_D} = \frac{c_u \widehat{L} r}{W \bar{x}}$$

Alternatively, Let c_m = mobilised shear resistance of soil ($\phi = 0$), necessary for equilibrium

$$\text{Then } W \bar{x} = c_m \widehat{L} r$$


$$\text{or } c_m = \frac{W \bar{x}}{\widehat{L} r}$$

$$\text{Hence } F = \frac{c_u}{c_m} = \frac{c_u \widehat{L} r}{W \bar{x}}$$

The distance \bar{x} of the centroid of the wedge, from centre of rotation O , can be determined by dividing the wedge into a number of vertical slices and dividing the algebraic sum of moment of weight of each slice by the weight of the wedge.

$c-\phi$ analysis

In order to test the stability of the slope of a $c-\phi$ soil, trial slip circle is drawn, and the material above the assumed slip surface is divided into a convenient number of vertical strips or slices. The forces between the slices are neglected, and each slice is assumed to act independently as a column of soil of unit thickness.

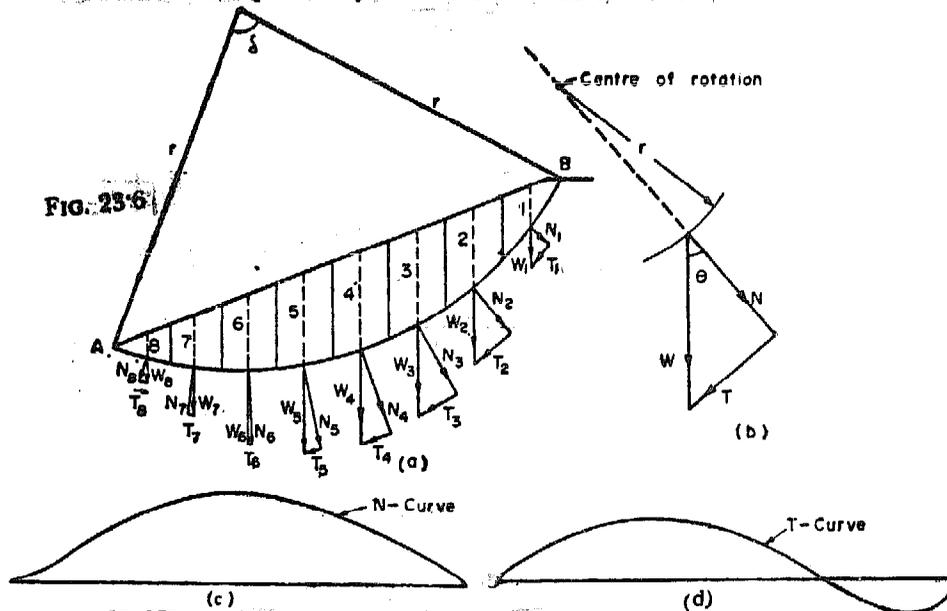

and of width b . The weight W of each slice is assumed to act at its centre. If this weight of each slice is resolved into normal (N) and tangential (T) components, the normal components will pass through the centre of rotation (O), and hence do not cause any driving moment on the slice. However, the tangential component T causes a driving moment $M_D = T \times r$, where r is the radius of the slip circle. The tangential components of the few slices at the base may cause resisting moment; in that case T is considered negative.

If c is the unit cohesion and ΔL is the curved length of each slice, then the resisting force, from Coulomb's equation is equal to $(c\Delta L + N \tan \phi)$.

For the entire slip surface AB , we have

Driving moment $M_D = r \Sigma T$

Resisting moment $M_R = r [c \Sigma \Delta L + \tan \phi \Sigma N]$

where

ΣT = algebraic sum of all tangential components

ΣN = sum of all normal components

$\Sigma \Delta L = \widehat{L} = \frac{2\pi r \delta}{360^\circ}$ = length AB of slip circle.

Hence factor of safety against sliding is

$$F = \frac{M_R}{M_D} = \frac{c \widehat{L} + \tan \phi \Sigma N}{\Sigma T}$$

A number of trial slip circles are chosen and factor of each is computed. The circle giving the minimum factor of safety is the critical slip circle.

In order to find ΣN and ΣT , N -curves and T -curves are drawn (Fig. 23.6 c, d) by making the ordinates of these diagrams equal to N and T values for different strips and joining them by smooth curves. The area of these diagrams can be measured with the help of planimeter and ΣN and ΣT can then be computed.


Source: Soil mechanics and foundations by B.C. Punmia, 1973

A.T.A., Swiss Association for Technical Assistance

Backfill of a retaining wall is the portion of the soil retained by the wall which has been artificially placed behind the wall (or any foundation) is completed and matured. The backfill material should be carefully selected. In add., it should be compacted to prevent large ground subsidence due to consolidation under its own weight. The material should be placed in thin layers not thicker than 25 to 35 cm each. Each layer should be compacted before the next one is placed. It should not be allowed to dump the material in sloping layers toward the wall, thus forming segregated layers of potential sliding surfaces. It is always a good practice to place an impervious soil in the upper layer of the backfill for the purpose of cutting down the amount of infiltration from the rain water, thus decreasing the influence of the erosion too. Where the passive earth resistance (e.g. deadman, main anchor blocks) has been taken into account, a trench foundation -i.e. excavation with vertical slopes- should be build or the backfill material must be placed carefully and the layers must be compacted very well.

Drainage and backfilling

The backfill must be done in all types of subground buildings. The backfill protects the surface ground against erosion, sliding etc.



Pervious backfill

(a)

Weep holes 15cm diameter or larger at 1.5 to 3 m horizontal spacing



Pervious backfill

Filter material

(b)

open-joint clay pipe or perforated metal pipe should be provided with rod-out system



Semipervious backfill

(c)

Vertical strips of filter material about 0.09 m² at midway between weep holes; used in conjunction with continuous horizontal strip of filter material

Filter material in pockets at weep holes, or in continuous strip



Fine-grained backfill

(d)

Longitudinal drain pipes (as shown) or weep holes can be used as desired




Expansive clay backfill

(e)

Common types of retaining wall drainage:

- a) weep holes ; b) longitudinal drain pipe ;
- c) weep holes with filter strips ; d) blanket drain ;
- e) double blanket drain .



Boulder and rubble backing used as filter material

SATA, Swiss Association for Technical Assistance


RETAINING WALLS AND FOUNDATION STRUCTURES FOR SUSPENDED AND SUSPENSION BRIDGES

A retaining wall is a wall constructed for the purpose of supporting a vertical or nearly vertical earth bank which, in turn, may support vertical loads. It may also be used to retain water or other materials such as coal, ore, etc. It differs from other types of retaining structures because it does not require external bracing for stability. For this reason, retaining walls have been widely used in a variety of purposes. When a retaining wall is used to support the end of a bridge as well as retaining the earth backfill, it is called an abutment. In the cases of suspended and suspended bridges we are dealing with a combination of foundation blocks & retaining walls. At the bridges there are normally not true retaining walls, because on the same structures often tensile forces are to be anchored. The calculation and design work, however, is shown on the following examples. Discussing the various theories in detail is outside the scope of this volume, and it is proposed to give here only the results obtained by important theories and summarize the assumption made in each.


EARTH PRESSURE

Substructures and foundations, such as retaining walls and basement, are subjected to lateral pressure where the ground level on one side differs from the ground level on the other side.

If the retaining structure is permitted to move away from the soil allowing a lateral expansion of the soil, the earth pressure decreases with the increasing expansion. Further expansion will cause a shear failure of the soil which a sliding wedge tends to move forward and downwards. At this state of failure the earth pressure is at the minimum value; additional deformation does not reduce the earth pressure any further. This minimum pressure is known as a c t i v e earth pressure. On the other hand if the retaining structure is forced to move towards the soil causing a lateral construction of the soil, the force required to start the movement is greater than the earth pressure against a rigid and unyielding wall. A larger force is required to move a greater distance until a state of failure is reached where sliding is formed. This wedge of soil moves upwards with respect to its original position. At this state of failure the earth pressure is at a maximum value known as p a s s i v e earth pressure or passive resistance.



a c t i v e earth pressure

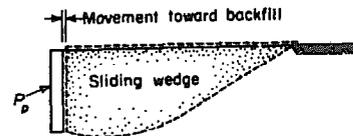


p a s s i v e earth pressure

Angle of repose (internal angle), weights and coefficients of friction of different soils

Description	Angle of repose	Coefficient of friction	Weight in kg./m ³
Very wet earth, wet clay.	15°	0.24	1440
Wet sand, gravel with sand.	25°	0.41	1600
Dry earth, dry clay, dry sand.	30°	0.52	1700
Clean sand, loose.	30°	0.50	1800
Clean sand, medium.	34°	0.50	1800
Clean sand, dense.	38°	0.55	1950
Rock	—	0.60-0.70	2000-2200

Active earth pressure on a retaining wall

- E_a = active earth pressure
- E_p = passive earth pressure
- K_a = coefficient of active earth pressure
- K_p = coefficient of passive earth pressure
- γ = unit weight of soil (t/m^3)
- β = angle of ground surface
- α = angle of the back of the wall
- δ = angle of the wall friction
- ρ = angle of internal friction

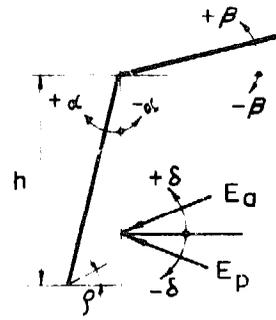

h = height of the wall

$$K_a = \frac{\cos^2(\rho + \alpha)}{\cos^2 \alpha \cdot \cos(\alpha - \delta) \left[1 + \frac{\sin(\rho + \delta) \cdot \sin(\rho - \beta)}{\cos(\alpha - \delta) \cdot \cos(\alpha + \beta)} \right]^2}$$

$$K_p = \frac{\cos^2(\rho - \alpha)}{\cos^2 \alpha \cdot \cos(\alpha - \delta) \left[1 - \frac{\sin(\rho - \delta) \cdot \sin(\rho + \beta)}{\cos(\alpha - \delta) \cdot \cos(\alpha + \beta)} \right]^2}$$

$$E_a = \frac{1}{2} \cdot \gamma \cdot h^2 \cdot K_a \quad [t/m] \quad E_p = \frac{1}{2} \cdot \gamma \cdot h^2 \cdot K_p \quad [t/m]$$

$$e_a = \gamma \cdot h \cdot K_a \quad [t/m^2] \quad e_p = \gamma \cdot h \cdot K_p \quad [t/m^2]$$

Horizontal earth pressure:

$$E_{ah} = E_a \cos(\alpha - \delta) \quad E_{ap} = E_p \cos(\alpha - \delta)$$

$$E_{ah} = \frac{1}{2} \cdot \gamma \cdot h^2 \cdot K_{ah} \quad t/m$$

EARTH PRESSURE COEFFICIENT

(The angle of wall friction is assumed to be 20°)

angle of internal friction ρ		20°		25°		27°		30°		33°					
angle of ground surface β		8°	15°	10°	20°	12°	25°	14°	28°	15°	30°				
angle of the back of the wall α	0°	back batten (width in depth)	Vertical	Earth pressure coefficients K_a	K_a	0.494	0.603	0.419	0.547	0.400	0.614	0.364	0.574	0.323	0.497
					K_{ah}	0.463	0.565	0.412	0.538	0.395	0.606	0.362	0.571	0.323	0.497
	1:6		K_a	0.418	0.507	0.341	0.442	0.319	0.487	0.283	0.444	0.245	0.373		
			K_{ah}	0.392	0.475	0.335	0.434	0.315	0.481	0.281	0.442	0.245	0.373		
	1:5		K_a	0.404	0.490	0.327	0.423	0.305	0.466	0.269	0.421	0.231	0.352		
			K_{ah}	0.379	0.459	0.321	0.416	0.301	0.460	0.267	0.419	0.231	0.352		
	1:4	K_a	0.385	0.467	0.307	0.398	0.285	0.435	0.249	0.390	0.211	0.322			
		K_{ah}	0.361	0.437	0.302	0.392	0.281	0.430	0.248	0.388	0.211	0.322			
	1:3	K_a	0.355	0.430	0.276	0.357	0.254	0.388	0.217	0.342	0.181	0.276			
		K_{ah}	0.333	0.403	0.271	0.351	0.251	0.383	0.216	0.340	0.181	0.276			


SAT A, Swiss Association for Technical Assistance

Structure stability of anchor blocks, walls etc.

Stability against overturning

Factor of safety against overturning = 1.5 (for granular backfill)
 = 2.0 (for cohesive backfill)

$$F. S. = \frac{\text{Sum of stabilizing moment}}{\text{Sum of overturning moment}} = 1.5 \text{ to } 2.0 \text{ (minimum)}$$

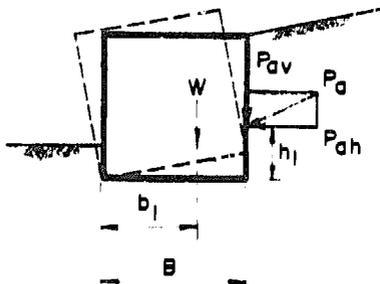

$$F. S. = \frac{\text{stabilizing moment}}{\text{overturning moment}}$$


$$= \frac{W b_1}{P_{ah} h_1 - P_{av} B} = \text{at least } 1.5 \text{ (2.0)}$$

where W = weight of wall + (weight of soil above the base - uplift due to Tension)

P_{ah} = horizontal and vertical components of lateral pressure P_o respectively (and Tensile forces)

Stability against sliding


Factor of safety against sliding = 1.50 (normal cases)
 = 2.00 (anchor walls etc)

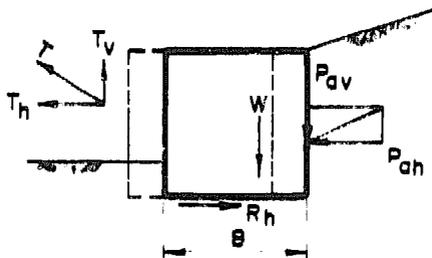

$$F. S. = \frac{\text{Horizontal resistance}}{\text{Horizontal force}}$$

$$= \frac{R_h}{P_{ah} + T_h} \text{ at least } 1.5 \text{ (2.0)}$$

where $R_h = (\text{Total weight} - \text{uplift forces}) \times \mu$
 μ = coefficient of friction

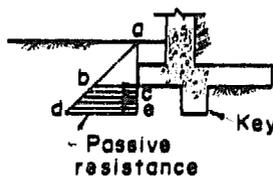


Stability against bearing capacity and soil failure

Refer to literature about soil mechanics

S.A.T.A. - Swiss Association for Technical Assistance

Types of walls.

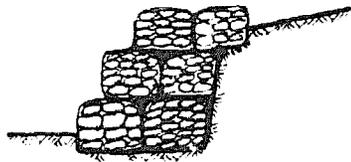

Gabion walls.

A barrier made of wire mesh, forming cells which are filled with stones or rubble. No tensile stress in any portion of the building unit. The design is similar to gravity walls.



Gravity walls.


Plain concrete or rubble (also drystone and breast walls), no tensile stress in any portion of wall.

Rugged construction is conservative but not in all cases economical for higher walls.



Semigravity walls.


A small amount of reinforcing steel is used for reducing the mass of concrete.

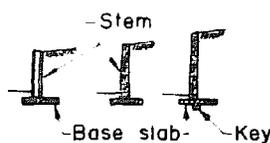

Cantilever walls.


In the form of an inverted T, each projecting portion acts as a cantilever. Generally made of reinforced concrete. For small walls, reinforced concrete blocks may be used.

This type is economical for walls of small to moderate height. (about 6 - 8 m.)

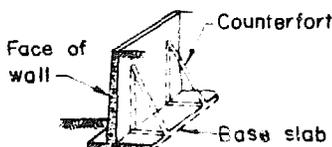

Counterfort walls.

Both base slab and face of wall span horizontally between vertical brackets known as counterforts. This type is suitable for high retaining walls, greater than about 6 m.

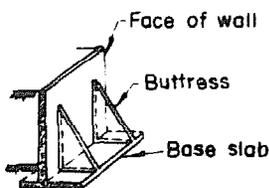


Buttressed walls.

Similar to counterfort wall except that the backfill is on the opposite side of vertical brackets (known as buttresses).

Not commonly used because of the exposed buttresses.

DRYSTONE RETAINING WALLS

Utmost care is required in the selection of stones of the proper shape and size and in the bonding of the whole work, as the stability of these walls entirely depends on these two factors, there being no mortar to cover the defects of workmanship and those arising from an improper choice of materials. For these reasons, it is the best plan to collect at site all the required materials, and to put the earth filling at the back after few meters of the wall are constructed and approved. The correct section of the wall depends on the quality of workmanship, the type of material to be supported, and the height. However, roughly speaking, the top width of the retaining wall should be kept at a minimum of 60 cm and the face batter 1 in 4, or 1 in 3, the latter being used for walls higher than 3 m. As a rule, no drystone retaining wall should be constructed of a height greater than 6 m. In case, where the height of the embankment is greater than this, the top 6 m may be made up of drystone masonry, but the portion below this must be constructed in lime or cement mortar. The beds

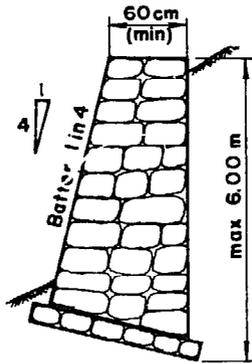

of the courses must be laid perpendicular to the face batter, and all other precautions as to the proper bonding of the work detailed under rubble masonry must be taken. Weep-holes must be provided to protect the drystone masonry wall against more pressure resulting from the water behind the wall.

BREAST WALLS

The main function of a breast wall is to protect the slopes of cutting in natural ground from the action of water and weather, and incidentally they have to support some pressure of earth behind. The section of a breast wall is very much dependent on the soil to be protected and the slope of the cutting. In some cases, the section adopted has a top width of 60 cm and a face batter of 1 in 2 and back batter of 1 in 3. Most soils can stand a steep slope immediately after they are cut, but a little exposure to weather makes the soil crumble and fall. It is, therefore, necessary that breast walls be constructed as soon after cutting is made as is possible. Water should not be allowed to get access to the back of the wall, and any interstices which exist should be filled either with puddle or small gravel. As in the case of retaining walls, the beds of the courses must be laid proper perpendicular to the face batter and the work must be correct bonded. Also on the breast wall the weep-holes must be often provided and it is important that they slope is

going downwards. It is this possible to protect the breast wall against water. The top of a breast wall should be compacted by using a little quantity of cement.


PITCHING

Pitching is a stone lining to protect earth surface from the scouring action of water, therefore, the resident engineer should take care to the coming rainy season. When the slope of the cutting is fairly flat, it is sufficient to line the face with a uniform thickness of drystone work. The thickness varies according to the requirements, the minimum being 30 cm and the maximum about 50 cm. Drystone pitching is often pointed with lime or cement mortar. In constructing pitching, stones should be properly fitted in so as to leave no large gaps between adjacent stones. Pitching is many times used on slopes of channels and dams,

Source : A treatise on building construction by : Deshpande and Vartak, 1968

Calculation Examples for retaining walls.

Example 1. Calculate the maximum thrust intensity and total pressure on a retaining wall of 3m. height with the following assumptions:

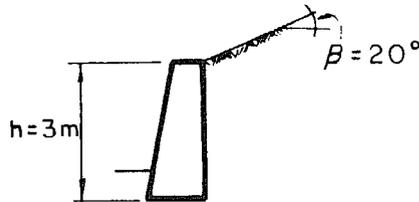

- angle of repose = 25°
- angle of wall friction = 20°
- angle of the back of the wall = 0°
- weight of the soil = 1600kg/m³

Total pressure per m length.

$$E_a = \frac{1}{2} \gamma \cdot h^2 \cdot k_a = \frac{1}{2} \cdot 1.6 \cdot 3^2 \cdot 0.547 = 3.938 \text{ t/m.}$$


$$E_{ah} = \frac{1}{2} \gamma \cdot h^2 \cdot k_{ah} = \frac{1}{2} \cdot 1.6 \cdot 3^2 \cdot 0.538 = 3.874 \text{ t/m.}$$

acting at $\frac{h}{3} = \frac{3}{3} = 1.00 \text{ m.}$ from bottom.


Example 2. Calculate the maximum thrust intensity and total pressure on a breast wall instead of above retaining wall.

$$E_a = \frac{1}{2} \gamma \cdot h^2 \cdot k_a = \frac{1}{2} \cdot 1.6 \cdot 3^2 \cdot 0.342 = 2.462 \text{ t/m.}$$

$$E_{ah} = \frac{1}{2} \gamma \cdot h^2 \cdot k_{ah} = \frac{1}{2} \cdot 1.6 \cdot 3^2 \cdot 0.340 = 2.448 \text{ t/m.}$$

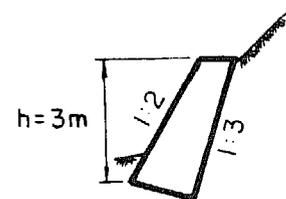

Example 3. Calculate the maximum thrust intensity and total pressure on a retaining wall of 5m. height with the following assumptions:

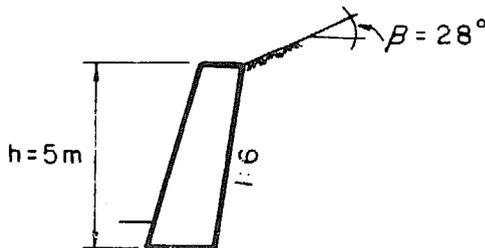

- angle of repose = 30°
- angle of wall friction = 20°
- angle of the back of the wall = 9.46°
- weight of the soil = 2000kg/m³

Total pressure per m length.


$$E_a = \frac{1}{2} \gamma \cdot h^2 \cdot k_a = \frac{1}{2} \cdot 2.0 \cdot 5^2 \cdot 0.444 = 11.1 \text{ t/m.}$$

$$E_{ah} = \frac{1}{2} \gamma \cdot h^2 \cdot k_{ah} = \frac{1}{2} \cdot 2.0 \cdot 5^2 \cdot 0.442 = 11.05 \text{ t/m.}$$

acting at $\frac{h}{3} = \frac{5}{3} = 1.67 \text{ m.}$ from bottom.

Design of gravity wall.

A. Gravity walls. Gravity walls are made of plain masonry, rubble stone, bricks or concrete. The wall should be proportioned such that there is no tensile stress at any point of the wall under any condition of loading.

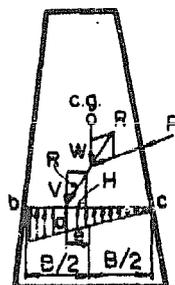

P = total lateral pressure acting
 on back of wall above pt. c

W = weight of wall above section bc

R = resultant of W and P

Proportion of wall must satisfy the following:

(1) Maximum vertical pressure at point b:

$$p = \frac{V}{B} \left(1 + 6 \frac{e}{B} \right) \leq \text{allowable compression}$$

(2) Minimum vertical pressure at point c:

$$p = \frac{V}{B} \left(1 - 6 \frac{e}{B} \right) \geq 0$$

(3) Horizontal shear along plane bc:

$$v = \frac{H}{B} \quad \text{allowable shear}$$

Stresses in gravity wall.

A gravity wall may be analysed by the principle of simple statics. Any horizontal section of the wall is subjected to two forces: a lateral force due to earth pressure and surcharge, and a vertical force equal to the weight of the wall above. The magnitude, direction and point of application of the resultant R of these two forces can be readily determined, Fig. above. Let the resultant force intercept the horizontal section at the point a, and let e be the distance from point a to the middle of the horizontal section, then this section is subjected to a vertical pressure q and a horizontal shear v

$$\text{(Pressure)} \quad q = \frac{V}{B} \left(1 \pm 6 \frac{e}{B} \right)$$






$$\text{(Shear)} \quad v = \frac{H}{B}$$

Where V, H = vertical and horizontal component of the resultant force R,

B = width of the horizontal section under investigation.

Semigravity wall & Cantilever wall.

These type of walls consist of three structural elements; the stem, the toe, and the heel, each acting as individual cantilevers. Sometimes there is provided a key which may help to get a greater factor of safety against sliding by using the passive earth pressure. The width of the base of a cantilever wall is usually 0.4 to 0.65 times the height of the wall.

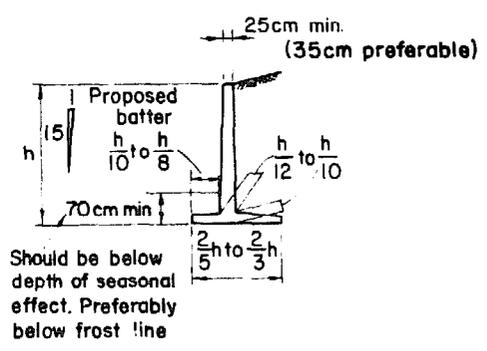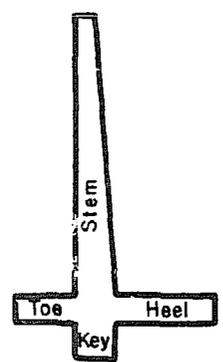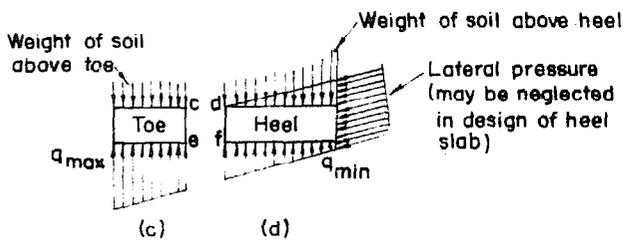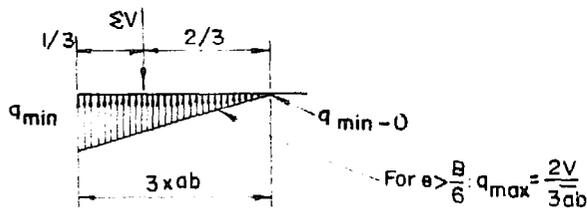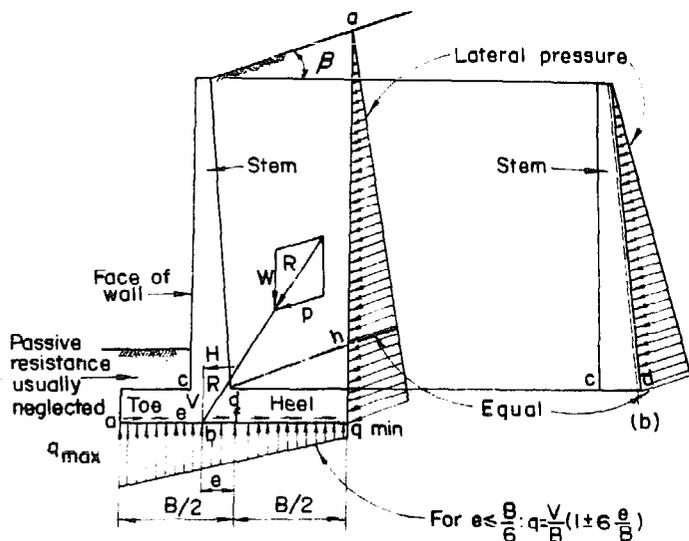

Forces acting on cantilever and counterfort walls

Common proportions of cantilever retaining walls

I. A. T. A. , Swiss Association for Technical Assistance

INTRODUCTION

For the block calculation the following loads, or the most unfavourable combination of loads, have to be taken into account :

- | | |
|--------------------------------|--|
| a) maximum cable or wire force | d) active earth pressure |
| b) dead weight of the block | e) passive earth resistance (pressure) |
| c) load of refilled earth | f) friction force |

In order to achieve the most suitable and economical anchorage solution the following conditions must be guaranteed :

- thorough soil investigations at the actual site, perhaps also shearing and bearing tests, revising of the plans according to the last determined results, possible application of a more appropriate solution.
- careful investigations of possible soil failures specially in cases of steep slopes with danger of sliding.
- qualified personnel for a careful supervision and execution.

Anchorage Type No. 1 (Gravity Blocks)

To improve the economy of the massive anchor block the use of block fills is recommended and shown in the standardized drawing of HMG Standard Design. It should be mentioned here, that at each bridge site under construction the solution of the so called "cell-type" foundation is proposed.

Anchorage Type No. 2 (Gravity/Earth Block)

In case the shape of the embankment is suitable and the fixation point of the main cable or wires is required to be above ground level these anchorage types are more economical than the types No. 1. The following forces are acting on this typ :

- | | |
|--------------------------|--------------------------|
| - cable wire force | - block dead weight |
| - active earth pressure | - weight of refill earth |
| - passive earth pressure | - friction force |

Four cases of possible soil failures and earth slides have to be considered :

- horizontal sliding. The calculation results in a minimum bank width in front.
 - Sliding upward on a plane.
 - Sliding upward on an arc.
 - (Classical) passive sliding triangle loading to the (minimum) earth resistance.
- In cases of endangered slopes their safety against earth failure has to be analysed carefully (e.g. Swedish circle method).

Anchorage Type No. 3 (Gravity/Rock block)

In the calculation of these two block types, namely Type 3a and 3b, the actual rock resistance is only regarded as an addition to safety, since only medium rock quality is assumed. If the technical report of the survey team includes the results of a quite well medium rock, however, the rock anchor rods may be taken into account (either acting by shearing or real anchorage bars), but, the safety factor without taking the rods into account should be at least about 0.9 to 1.0. Many variations of the block design are possible according to the embankment situation.

The calculation of the block of Typ No. 3c takes the rock resistance into account. This leads to a reduced concrete volume. The assumed value of the permissible pressure in front of the block spur should not be greater than 8 kg/cm². For calculating the Type No. 3d a good rock is required. The excavation work must be made proper according to the detail drawings and the front face should be as vertical as possible. The rock surface has to be sufficiently rough and to be provided with the required number of steel anchor bars. The usual steel concrete analysis has to be applied.

Anchorage Type No. 4 (Rock anchor)

In every case of good or medium rock, found at an anchorage site, the applicability of rock anchors should be investigated. A considerable cost reduction can be made possible by these anchor types. The types of tunnel anchorage needs excellent rock conditions. The rock excavations should be limited to relatively small volumes of 20 to 30 m³. If a large tunnel should be excavated the required volume of a foundation (Types 1, 2, or 3) might be the cheaper way of anchor a tensile force. These kind of foundations needs a skill labour too and a very good supervision and controll.

STRUCTURAL ANALYSIS

Gravity blocks typ no. 1






No. : 3.602

Date : 10th Jan. 77

Sig : *Has. P. Hob*

GRAVITY BLOCKS

Type No. 1: Utilising normal friction only (partly weight of backfilling) (without passive earth pressure)

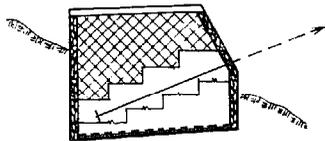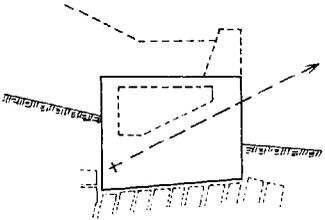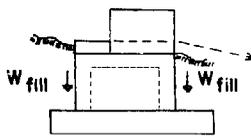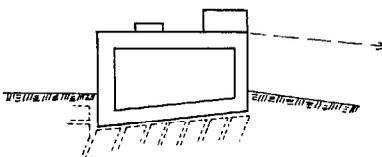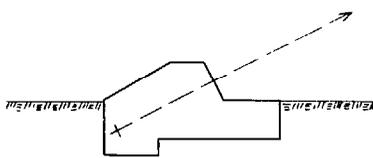TYPE NO	Shape of anchorage blocks	coefficient of friction	General description, presupposed soil conditions, comparison calculation methods, permissible soil pressure	used at bridge type
1a		0.45 (Soil) 0.70 (Rock)	HMG standard design. The shape applied may vary. Due to infill of sand, gravel and rubble concrete can be saved. R.R. Masonry 1:6 Plumb concrete 1:3:6 + 40% Boulder (rubble)	Suspension
1b		0.45 (Soil) 0.70 (Rock)	HMG standard design and modified standard design. This type is used on soil and on rock. The shape applied may vary. R.R. Masonry 1:6 Plumb concrete 1:3:6 + 40% rubble	Suspension
1c		0.45 (Soil) 0.70 (Rock)	Used on soil and on rock. Concrete savings due to infill of sand, gravel and boulders. Economical type of Foundation. Certain slope shape and earth protection in front of the anchorage required. R.R. Masonry 1:6 and mainly Plumb concrete 1:3:6 + 40% Boulder.	Suspended
1d		0.45 (Soil) 0.70 (Rock)	Used on soil and on rock. Concrete saving due to infill of sand, gravel and boulders R.R. Masonry 1:6 and mainly Plumb concrete 1:3:6 + 40% Boulder.	Suspended
1e		0.45 (Soil)	Poor soil conditions with an estimated maximum permissible soil pressure of about $0.5 - 1.0 \frac{\text{kg}}{\text{cm}^2}$ Calculation according to 1a and 1b. No soil resistance considered.	Suspension

Sources: German Consultants (Dr. Ing. Walter KG. DIWI)
Design Section of HMG Suspension Bridge Division

S A T A , Swiss Association for Technical Assistance






HMG Nepal

Roads Department

Suspension Bridge Division

GRAVITY BLOCKS

Type NO. 2: Utilising passive soil resistance plus normal friction (using passive earth pressure)

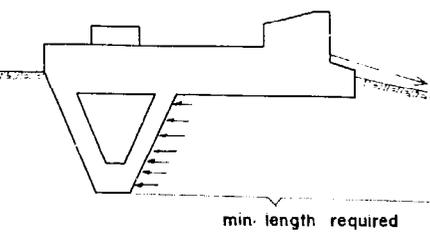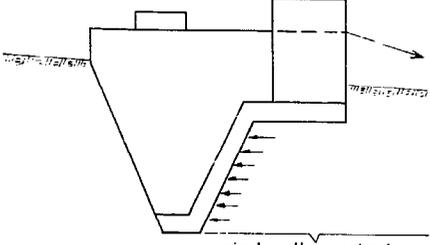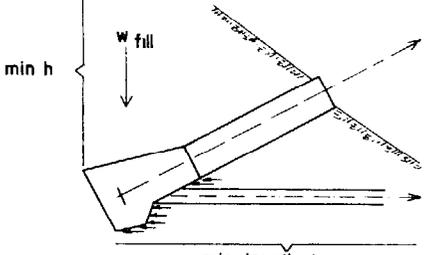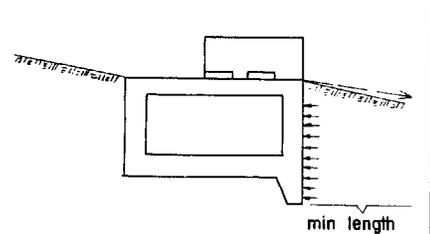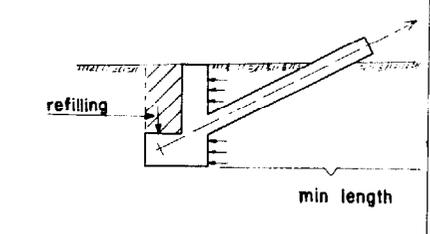TYPE NO	Shape of anchorage blocks	coefficient of friction	General description, presupposed soil conditions, comparison, calculation methods, permissible soil pressure	used or bridge type
2a		$\tan(0.9\psi)$	<p>Application requires special shape of embankment. Considerable savings of concrete. Several cases of sliding or soil failure have to be taken into consideration.</p> <p>Assumed value of maximum soil pressure. $3.0 \frac{\text{kg}}{\text{cm}^2}$ Safety factors > 2.0</p>	Suspended
2b		$\tan(0.9\psi)$	<p>Middle-wall modification of type 2a Application if a higher saddle level for the main cables is required. Other conditions and values according to 2a.</p>	Suspended
2c		$\tan(0.9\psi)$	<p>Very little concrete consumption, but requiring big excavation and refill. Certain minimum length l and height h necessary</p> <p>(a) Suspension Bridge. (b) Suspended Bridge. Slope to be protected against erosion.</p>	Suspension Suspended
2d		0.45	<p>Shape according to 1d in principle. Certain amount of soil resistance additionally taken into consideration. Certain slope shape and slope protection necessary.</p>	Suspended
2e		$\tan(0.9\psi)$	<p>Very economical wall type anchorage. More difficult application in case of horizontal acting force. Certain slope shape and earth protection in front of the anchorage required.</p>	Suspension Suspended

Sources: German Consultants (Dr. Ing. Walter KG DIWI)
Design Section of HMG Suspension Bridge Division





STRUCTURAL ANALYSIS
Gravity rock blocks type no. 3

No. : 3.604

Date : 10th Jan. 77

Sig : *[Signature]*

GRAVITY ROCK BLOCKS
Type No. 3: Utilising rock resistance.

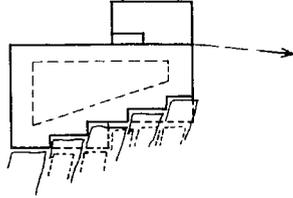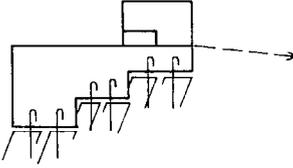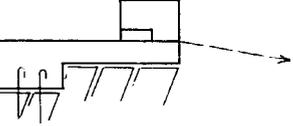TYPE NO	Shape of anchorage blocks	coefficient of friction	General description, presupposed soil conditions, comparison, calculation methods, permissible soil pressure	used at bridge type
3a		0.7	Some variations of the shape possible. Horizontal widening of the rear section of the anchor; filling; and various numbers of steps. Calculation simplified by considering friction only. Reduced safety factor possible. Medium rock with layers not inclined towards the river. R.R. Masonary 1:6 and mainly Plumb concrete 1:3:6 + 40% rubble.	Suspended
3b		0.7	Differing from 3a by the application of anchor bars. Further reduction of concrete volume. Rock conditions according to 3a. Mainly Plumb concrete 1:3:6 + 40% boulders.	Suspended
3c		0.7	Reduced concrete volume, one step only, anchor bars possible. Reduced safety factor, rock resistance taken into account. Good rock conditions. Mainly Mass concrete 1:3:6	Suspended
3d		0.7	Minimum concrete volume using a <u>larger</u> number of anchor bars. Good rock conditions. Mainly Mass concrete 1:3:6	Suspended

Sources: German Consultants (Dr. Ing. Walter KG. DIWI)
Design Section of HMG Suspension Bridge Division

STRUCTURAL ANALYSIS
Rock anchors typ no. 4





No. : 3.605

Date : 10th Jan. 77

Sig : *for P/L*

ROCK ANCHORS

Type No. 4: Utilising rock resistance in an excavated hole and utilising drilled rock holes

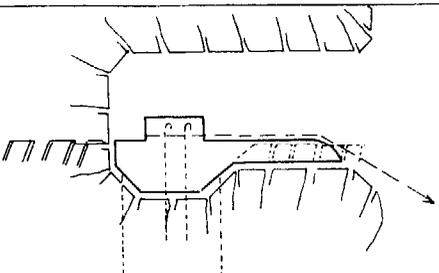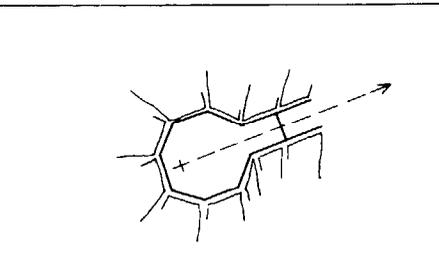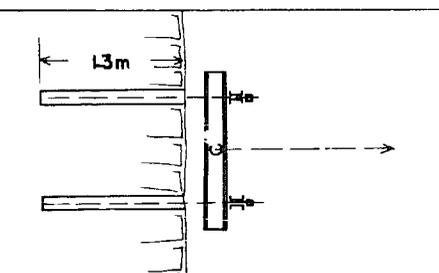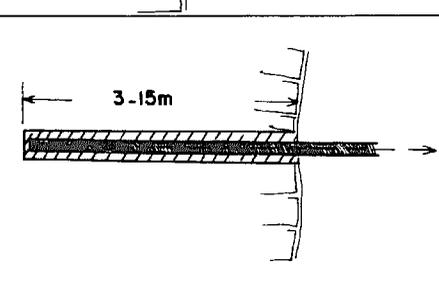
TYPE NO	Shape of anchorage blocks	Coefficient of friction rock bearing bond stress	General description, presupposed soil conditions, comparison, calculation methods, permissible soil pressure	used at bridge type
4a		$A = 0.9 \tan \varphi$ max. rock bearing = 10-15 Kg/cm ²	<p>Very small requirement of concrete. Many variations of the excavation shape possible, also a non-tunnel solution. Excellent rock required. Mainly Mass concrete 1:3:6</p>	<p>Suspension Suspended</p>
4b		$A = 0.9 \tan \varphi$ max. rock bearing = 10-15 Kg/cm ² Bond stress 1-4 Kg/cm ² (Steel concrete)	<p>Bulb-shaped anchor. Rock conditions according to 4a. Also applicable at suspended bridge type in case of suitable slope shape. Mainly Mass concrete 1:3:6</p>	<p>Suspension Suspended</p>
4c		Bond stress 1-4 Kg/cm ² (Steel-mortar - rock)	<p>No concrete required. Holes drilled with percussion-rotation equipment. Length of holes limited. Anchors fitted with system described in Chapter 9.5. Excellent rock required.</p>	<p>Suspension Suspended</p>
4d		Bond stress 1-4 Kg/cm ² (Steel wire - mortar-rock)	<p>No concrete required. Holes drilled with core drilling equipment, rotation only. Length of holes extended. Anchors fitted with cement injection (hand operated injection pump). At least medium rock required</p>	<p>Suspension Suspended</p>

Sources: German Consultants (Dr. Ing. Walter KG. DIWI)
Design Section of HMG Suspension Bridge Division

SAT A, Swiss Association for Technical Assistance

Simplified design of a gravity anchor block

used on standard bridges etc.

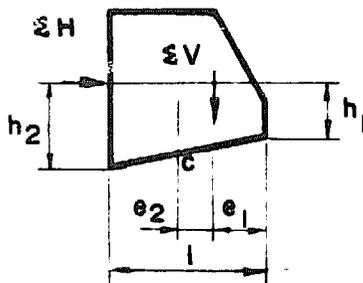

block with b

ΣH = horizontal component of the anchorage forces and sometimes also of the earth pressure

ΣV = Total vertical reactions

$$\text{Safety against sliding} = \frac{0.45 \cdot \Sigma V}{\Sigma H} \geq 1.5$$

$$\text{Block weight required} = \Sigma V \geq 3.33 \cdot \Sigma H$$

$$\text{Safety against overturning} = \frac{\Sigma V \cdot e_1}{\Sigma H \cdot h_1} \geq 1.50$$

$$\text{Maximum eccentricity} = e_1 \geq \frac{l}{6}$$

$$\text{Maximum soil pressure} = \frac{4}{3} \frac{\Sigma V}{b(1 - 2e_2)} \leq 3.0 \text{ Kg/cm}^2$$

if $e_2 \leq \frac{l}{6}$ Safe bearing capacity

$$\text{Maximum soil pressure} = \frac{\Sigma V}{b \cdot l} \left(1 \pm \frac{6e_2}{l} \right) \leq \text{Safe bearing capacity}$$

if $e_2 > \frac{l}{6}$

$$\text{Eccentricity } e_2 = \frac{\Delta M_c}{\Sigma V}$$

STRUCTURAL ANALYSIS


No. 13702

Calculation example for a main anchor block for a suspended bridge (without taking any earth pressure into account)

Date: 19th Jan. 77

Sig: *[Signature]*

Calculation example for a main anchor block of a suspended bridge. (without any earth pressure)

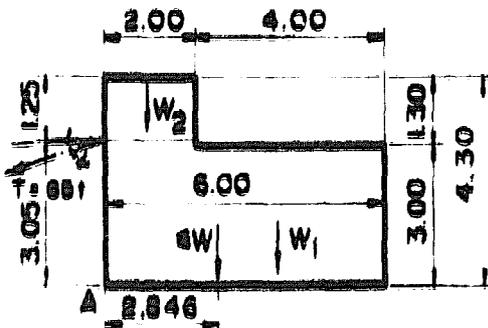

Cell type foundation = 2 t/m³
 Width = 4.00 m
 Gangway = 1.00 m
 $\alpha = 12.5^\circ$
 T = 65 t
 $T_v = 65 \sin \alpha = 14.07$ t
 $T_h = 65 \cos \alpha = 63.46$ t

Soil quality = $\tan \mu = 0.50$
 Permissible pressure = 2.5 Kg/cm²
 $W_1 = 6.0 \cdot 3.0 \cdot 4.5 \cdot 2.0 = 162.00$ t
 $W_2 = 2.0 \cdot 1.3 \cdot (4.5 - 1.90) \cdot 2 = 13.52$ t
 $T_v = 65 \cdot 0.2164 = 14.07$ t
 $\Sigma V = 189.59$ t
 $\Sigma W = 175.52$ t

Eccentricity of total weight:

$$e = \frac{W_1 \cdot 3.0 + W_2 \cdot 1.0}{\Sigma W} = \frac{162.00 \cdot 3.00 + 13.52 \cdot 1.00}{175.52} = 2.846 \text{ m}$$


Stability against overturning

$$S = \frac{\Sigma M_r}{\Sigma M_i} = \frac{\Sigma W \cdot 2.846}{T_h \cdot 3.05 \cdot \cos \alpha} = \frac{499.53}{197.81} = 2.52 > 1.5$$

Stability against sliding

$$S = \frac{\Sigma V \cdot \mu}{\Sigma H} = \frac{189.59 \cdot 0.5}{63.46} = 1.494 > 1.50$$

Max. soil bearing

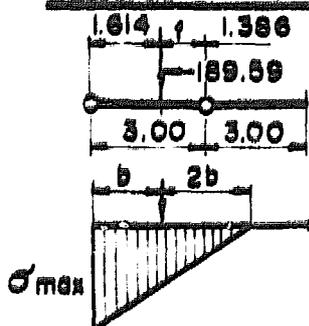

$$M_A = -W_1 \cdot 0 + W_2 \cdot 2.0 + T_h \cdot 3.05 + T_v \cdot 3.00$$

$$M_A = +13.52 \cdot 2.0 + 63.46 \cdot 3.05 + 14.07 \cdot 3.00 = 262.80 \text{ mt}$$

$$f = \frac{M_A}{\Sigma V} = \frac{262.80}{189.59} = 1.386 \text{ m} > \frac{b}{6} = 1$$


$$b = 3.00 - f = 1.614 \text{ m}$$

Max. soil bearing = $\sigma_{max} = \frac{2 \cdot \Sigma V}{3b \cdot \text{width of the foundation}}$


$$\sigma_{max} = \frac{2 \cdot 189590}{3 \cdot 1.614 \cdot 450} = 1.74 \text{ Kg/cm}^2 \leq 2.5$$

S.A.T.A. Swiss Association of Technical Architects

CALCULATION EXAMPLE FOR A WIND GUY ANCHOR BLOCK.

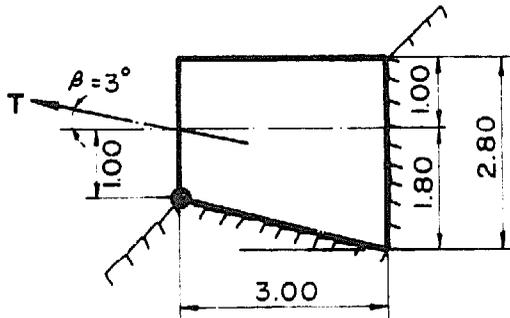

Side Elevation

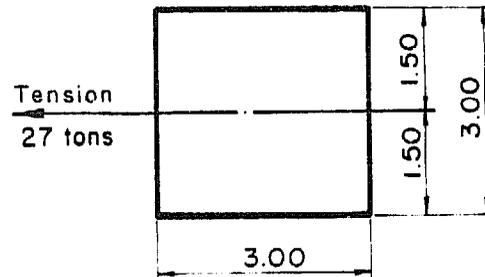

Plan

Foundation width = 3.00 m
 Rock quality : weathered
 Tension = 27.0 tons
 $\tan \alpha = 80 : 300 = 0.267 \quad \alpha = 14.93^\circ$

Coefficient of friction = 0.60
 Permissible rock pressure = 6 Kg/cm²
 $T_V = T \cdot \sin \beta = 1.4$ tons (uplifting)
 $T_H = T \cdot \cos \beta = 27.0$ tons


Volume of the block

Weight of the block

$$V = \left[\frac{(2.80 - 0.80) + 2.80}{2} \cdot 3.0 \right] \cdot 3.0 = 21.60 \text{ m}^3$$

$$W = 21.6 \cdot 2.3 = 49.68 \text{ t}$$

Centre of gravity

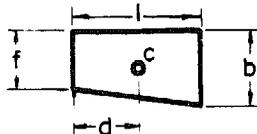

$$d = \frac{l}{3} \cdot \frac{b + 2f}{b + f} = \frac{3.0}{3} \cdot \frac{2.8 + 4.0}{2.8 + 2.0} \approx 1.42 \text{ m}$$

Stability against overturning

$$S.F = \frac{\sum M_{st}}{\sum O} = \frac{49.68 \cdot 1.42}{27.0 \cdot 1.0} = \frac{70.5456}{27.0} = 2.613 > 1.50$$

Stability against sliding

Due to the inclined span the following formula can be used

α = angle of the inclined bottom μ = factor of friction

$$S.F = \frac{(\sum W - T_V) \cdot (\cos \alpha \cdot \mu + \sin \alpha)}{\sum H \cdot \cos} = \frac{(49.68 - 1.4) \cdot (0.966 \cdot 0.6 + 0.258)}{27.0 \cdot 0.966} = 1.55 > 1.50$$

Max. rock bearing at A (simplified calculation)

$$b = \frac{\text{Moment stabilizing} - \text{Moment overturning}}{\sum V} = \frac{(70.5456 - 27.0)}{(49.68 \cdot 1.4)} = 0.902 \text{ m}$$

$$e = 1.42 - 0.902 = 0.518 > \frac{1}{6} = 0.50$$

$$\sigma_{\max} = \frac{2 \cdot \sum V}{3 \cdot b \cdot \text{width of the foundation}} = \frac{2 \cdot 48.28}{3 \cdot 0.902 \cdot 3.0} = 11.894 \text{ t/m}^2 = 1.19$$

$$\sigma_{\max} = 1.19 \text{ Kg/cm}^2 \ll 6.0 \text{ Kg/cm}^2$$

STRUCTURAL ANALYSIS


Calculation example for a gravity/rock block for a suspended bridge

No. : 3.704

Date : 24th Jan. 77

Sig : *[Signature]*

CALCULATION EXAMPLE FOR A GRAVITY/ROCK BLOCK FOR A SUSPENDED BRIDGE.

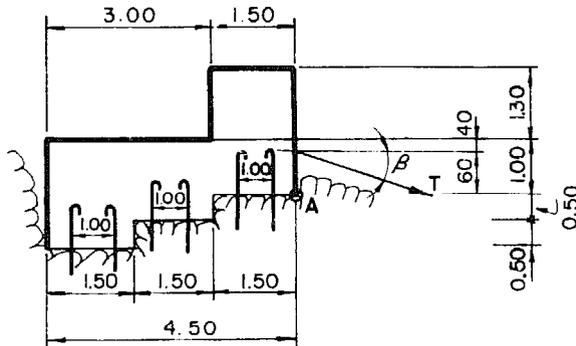

Gangway ... = 1.90m
 Foundation width ... = 3.50m

Rock quality ... = medium

β = Angle of cable force = 12.5°

T = 60t

$T_v = T \cdot \sin \beta = 12.99t$


$T_H = T \cdot \cos \beta = 58.58t$

Permissible rock pressure = 8kg/m²

Total 6.4 = 24 rod ϕ 1"

Coefficient of friction = 0.65

Weights

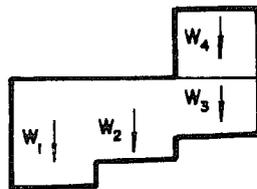

$W_1 = 1.5 \cdot 2.0 \cdot 3.5 \cdot 2.2 = 23.100t$

$W_2 = 1.5 \cdot 1.5 \cdot 3.5 \cdot 2.2 = 17.325t$

$W_3 = 1.5 \cdot 1.0 \cdot 3.5 \cdot 2.2 = 11.550t$

$W_4 = 1.5 \cdot 1.3 \cdot (3.5 - 1.9) \cdot 2.2 = 6.864t$

$W_T = 58.839t$

Volume = 26.745m³

Eccentricity of the total weight

$e = \frac{23.10 \cdot 3.75 + 17.325 \cdot 2.25 + 11.550 \cdot 0.75 + 6.864 \cdot 0.75}{58.839}$


$e = \frac{86.625 + 38.98125 + 8.6625 + 5.148}{58.839} = 2.37m.$

Safety against overturning (with reference to A) without considering the steel bar anchors.

S.F. = $\frac{\Sigma V \cdot e}{T \cdot \cos \alpha \cdot 0.60} = \frac{58.839 \cdot 2.37}{60 \cdot 0.9763 \cdot 0.60} = 3.97 > 1.5$

Safety against sliding without considering the steps and the anchor bars.

$\tan \alpha = \frac{1.0}{4.5} = 0.222; \quad \alpha = 12.53^\circ$

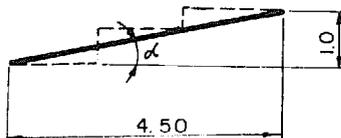

S.F. = $\frac{\min. \Sigma V (\cos \alpha \cdot \mu + \sin \alpha)}{\max. \Sigma H \cdot \cos \alpha}$

S.F. = $\frac{(58.839 + 12.99)(0.976 \cdot 0.65 + 0.217)}{58.58 \cdot 0.976} = 1.07$

As this value has been found out by a simplified calculation, it can be regarded to be sufficient.

SAT A, Swiss Association for Technical Assistance

STRUCTURAL ANALYSIS

No. : 3.705


Calculation example for a gravity/rock block for a suspended bridge (continuation)

Date : 24th Jan. 77

Sig : *Ks P.H.*

Eccentricity of the resultant force

$$e = \frac{\Delta M}{\Sigma V} = \frac{(58.839 \cdot 2.37) - (60 \cdot 0.9763 \cdot 0.6)}{58.839} = 1.77m$$

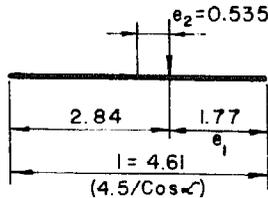

Max. pressure on rock

$$\frac{l}{6} = 0.768m < 0.535$$

$$\sigma_{max} = \frac{4}{3} \cdot \frac{\Sigma V}{b(1-2 \cdot e_2)} = 6.33t/m^2 = 0.63kg/cm^2 \ll 8.0$$

Note worth: The safety against overturning is greater than 1.5 (3.92) just by weight. The stability against sliding of 1.07 is a fictive value. The actual one is higher than required, as the foundation is provided with anchor bars and excavated steps.

Anchor length of the bars required

$$l_A = \frac{\text{Tension}}{G \cdot \text{bond stress}}$$


We assume a bond stress of 2.0 kg/cm²

$$l_A = \frac{912.5 kg}{2.5 \cdot \pi \cdot 2.0} = 58.1 cm$$

Due to unknown rock formation, the anchor length is chosen with 1.00 m.

In case the anchor bars are considered to take the load, the stresses are:

Stresses in the anchor bars:

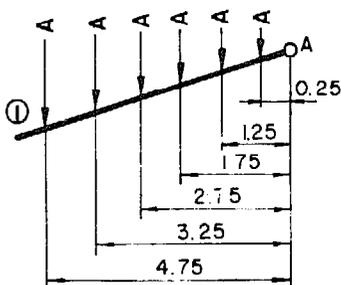

$$A = 4 \cdot A_{\phi 25} = 19.63 cm^2$$

$$M_A = T \cdot \cos \beta \cdot 0.6$$

$$M_A = 35.148 mt$$

$$\text{Tension}_1 = \frac{\Sigma M_A \cdot 4.25}{(4.25^2 + 3.25^2 + 2.75^2 + 1.75^2 + 1.25^2 + 0.25^2)} = 3.65t$$

$$\sigma_T \text{ in one rod} = \frac{3.65t}{19.63 cm^2} = 0.186t/m^2 \ll \sigma \text{ permissible.}$$

Shearing in the anchor bars


$$\gamma = \frac{\Sigma H}{\Sigma F} = \frac{58.58}{117.78} = 0.497t/m^2 < \gamma \text{ permissible}$$

Comparison stress in the anchor bars

$$\sigma_c = \sqrt{\sigma^2 + 3 \cdot \gamma^2} = \sqrt{0.186^2 + 3 \cdot 0.497^2} = 0.88t/m^2 < \sigma \text{ permissible.}$$

S A T A , Swiss Association for Technical Assistance

CALCULATION EXAMPLE FOR ROCK ANCHORAGE

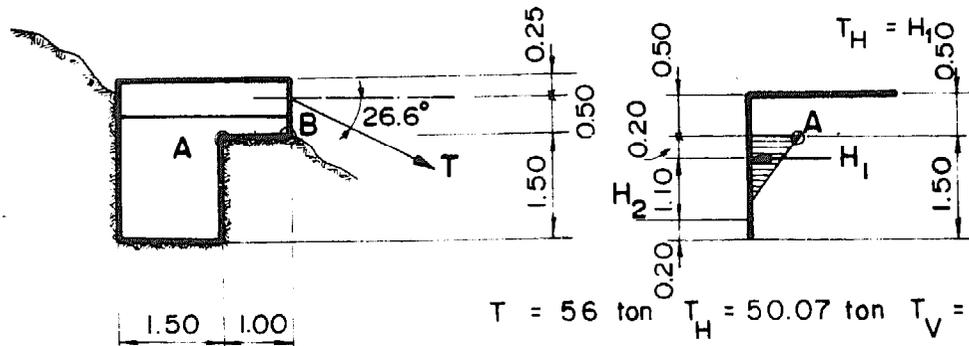

$T = 56 \text{ ton}$ $T_H = 50.07 \text{ ton}$ $T_V = 25.07 \text{ ton}$


Concrete Volume:

Slab = $0.75 \cdot 2.50 \cdot 1.8 = 3.375 \text{ m}^3$
 Post = $1.50 \cdot 1.80 \cdot 1.5 = 4.050 \text{ m}^3$
 Total = 7.425 m^3

Concrete weight = 16.34 ton

Rock condition is excellent

Permissible bearing = 15 Kg/m^2

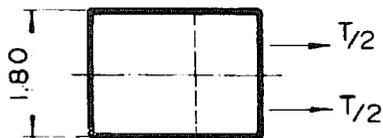

max. rock bearing at A



$H \cdot (2.0 - 0.2) = H_1 \cdot (1.50 - 0.2 - 0.2)$

$H \cdot 1.80 = H_1 \cdot 1.10$

$H_1 = \frac{1.80}{1.10} \cdot 50.07 = 81.933 \text{ t}$

$\sigma_{\text{max}} = \frac{2 \cdot 81.933}{(3 \cdot 0.20) \cdot 1.8} = 151.17 \text{ t/m}^2 \approx 15.0 \text{ Kg/cm}^2$

max. soil bearing at B

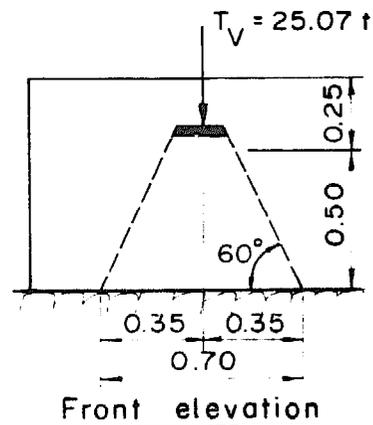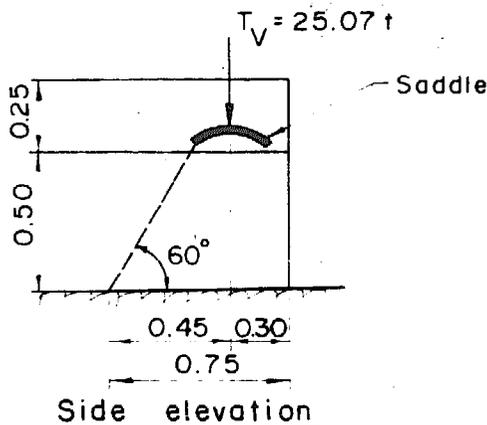

$\sigma \approx \frac{25070}{75 \cdot 70} = 4.775 \text{ Kg/m}^2 < \sigma \text{ permissible}$

STRUCTURAL ANALYSIS

Calculation example for rock anchorage (continuation)

No. : 3.707

Date : 19th Jan. 77

Sig : *[Signature]*

Shearing in the concrete post


$$\tau \cong \frac{50070}{0.9 \cdot 140 \cdot 180} = 2.21 \text{ Kg/cm}^2 < \tau_{\text{permissible}}$$

Reinforcement in the post

$$M = 0.50 \cdot 50.07 = 25.035 \text{ mt}$$

$$\text{required reinforcement steel} = \frac{M}{0.9 \cdot h \cdot 1.4} = \frac{25.035}{0.9 \cdot 1.4 \cdot 1.4} = 14.19 \text{ cm}^2$$

$$\text{say } 8 \phi 16 \cong 16 \text{ cm}^2 > 14.19 \text{ cm}^2$$

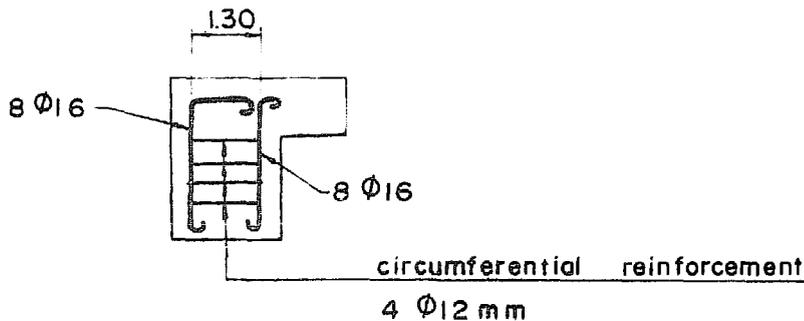

Reinforcement in the slab

$$Z = 50.07 \text{ tons}$$

$$\text{required reinforcement steel} = \frac{50.07}{1.4} = 35.76 \text{ cm}^2$$

$$\text{say } = 2 \times 9 = 18 \phi 16 = 36 \text{ cm}^2 > 35.76 \text{ cm}^2$$



ATA, JWRB APPROVED FOR TECHNICAL ASSISTANCE

STRUCTURAL ANALYSIS


No.: 3.708

Factor of friction for inclined foundation bottom

Date: 22nd Feb. 77

Sig.: *[Signature]*

FACTOR OF FRICTION FOR INCLINED FOUNDATION BOTTOM

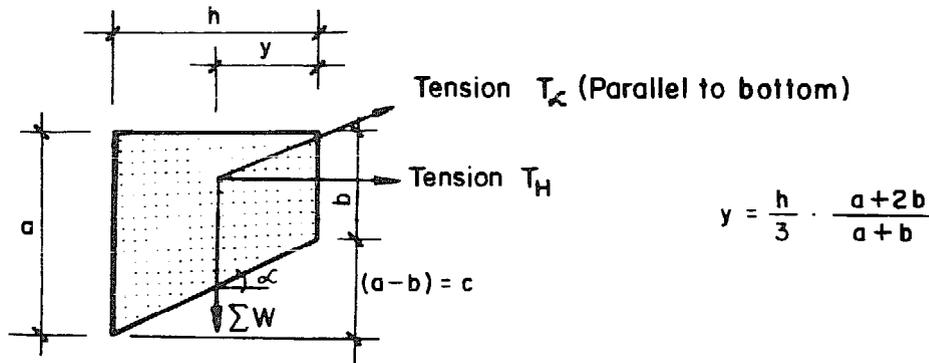

$$y = \frac{h}{3} \cdot \frac{a+2b}{a+b}$$

$$\tan \alpha = \frac{(a-b)}{h} = \frac{c}{h}$$

$\tan \rho = \mu = \text{factor of friction}$

$$T_H = T_{\alpha} \cdot \cos \alpha$$

$$T_{\alpha} = \frac{T_H}{\cos \alpha}$$

Resistant force due to weight (ΣW)

$$R.F. \text{ parallel to bottom} = R.F_{\alpha} = \Sigma W (\sin \alpha + \mu \cdot \cos \alpha)$$

$$R.F. \text{ Horizontal} = R.F_H = \Sigma W \cdot \tan (\alpha + \rho)$$

$$R.F. \text{ H} = \Sigma W \cdot \mu' \quad (\text{when inclined bottom face})$$

Table for factor of friction μ' (when inclined bottom)


α	μ Horizontal bottom						
	0.40	0.45	0.50	0.55	0.60	0.65	0.70
0°	0.40	0.45	0.50	0.55	0.60	0.65	0.70
4°	0.48	0.54	0.59	0.64	0.70	0.75	0.81
8°	0.57	0.63	0.69	0.75	0.81	0.87	0.93
12°	0.67	0.73	0.79	0.86	-	-	-
α	μ' (inclined bottom)						

Factor of safety against sliding: $F.S = \frac{\Sigma W \cdot \mu'}{T_H} \geq 1.5 \text{ to } 2.0$

SATA, Swiss Association for Technical Assistance

PASSIVE EARTH PRESSURE ON AN ANCHOR WALL

This kind of foundation is suitable when it can be installed below the level of the original ground. Short deadman near ground surface is shown below. This dead-

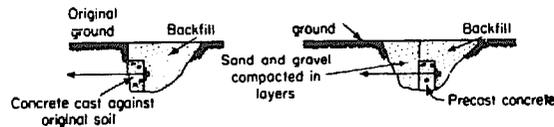

man with a length L is subjected to keep an anchor pull T (e.g. Tension of the main-cables of a suspension bridge). The system of the main anchor blocks for suspended bridges allows the use of the passive earth pressure which leads to a very economical solution. Take care that a certain slope shape and slope protection must exist. The following passive and active earth pressure coefficient are useful :


Description	soil in place				backfill	
	26°	30°	34°	38°	26°	30°
angle of internal friction ϕ						
coefficient of active earth pressure K_a	0.35	0.30	0.25	0.20	0.50	0.35
coefficient of passive earth pressure K_p	3.00	5.00	7.00	9.00	—	—

For the above figures the soil surface is assumed as horizontal -i.e. $\beta = 0^\circ$


The total ultimate capacity of a short deadman in granular soil near ground surface is :

$$T_{ult} \leq L(E_p - E_a) + \frac{1}{3} K_0 \gamma (\sqrt{K_p} + \sqrt{K_a}) H^3 \tan \phi$$

where L = length of the deadman, m
 H = height of deadman
 ϕ = angle of internal friction
 E_p, E_a = total passive and active earth pressure, t per m
 K_0 = coefficient of earth pressure at rest. It may be taken as 0.4 for design of deadman,
 γ = unit weight of soil, t/m³ K_p, K_a = coefficients of passive and active earth pressure,

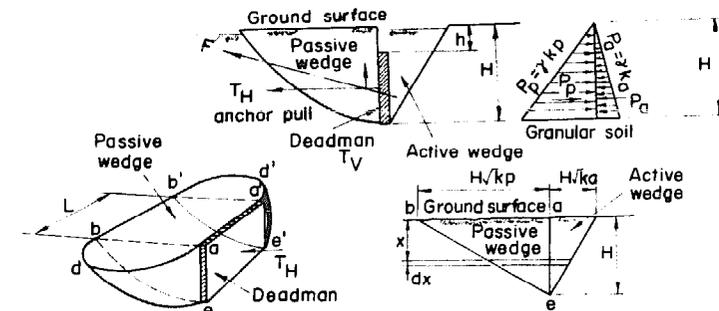

Uplift capacity = W + F

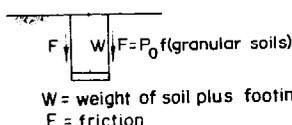

(b)
 P_0 = total horiz. earth pressure at rest acting on the entire vertical surface
 = 0.4 x unit wt of soil
 f = coeff. of friction
 = 0.35 - 0.55

The uplift capacity resulting from the friction should normally not be taken into account. This assumption may be unsafe in some cases (e.g. backfilling etc)

The factors of safety should be taken at least with 1.5 for the ultimate capacity as well as for the safety against sliding, therefore a safety factor of $1.5 \times 1.5 = 2.25$ will be developed.

Reference : Wayne C. Teng : Foundation design, Teng Associates, USA, 1974

STRUCTURAL ANALYSIS

No. : 3.802

Calculation example for an anchor wall
 Deadman used as main cable anchorage by using the
 passive earth resistance and friction resistance

Date : 19th Jan. 77


Sig : *[Signature]*

Anchor wall.

(Deadman used as main cable anchorage by using the passive earth pressure)

This system allows saving of concrete and costs. Certain slope, shape and slope protection are necessary. The factors of safety should be taken as follows:

- Factor of safety against overturning = 1.5 (for granular backfill).
 = 2.0 (for cohesive backfill).
- Factor of safety against sliding = 2.0
- Slipping: Frictional resistance = Total weight x co-efficient of friction.
- Formulas refer to Chapter: Passive earth pressure on an anchorage wall.

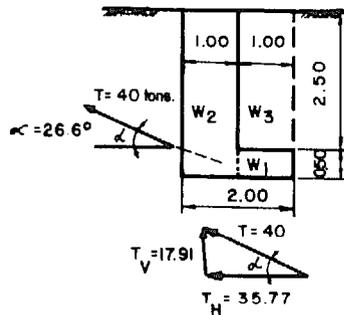

- H = 3.00 m.
- L = 3.00 m. (Width)
- $\phi = 30^\circ$
- Weight of soil = 1.7 t/m³
- Weight of concrete = 2.3 t/m³
- Factor of sliding = 0.9 tan $\phi = 0.52$

$T_v = T \cdot \sin \alpha = 17.91 t.$
 $T_H = T \cdot \cos \alpha = 35.77 t.$

Coefficient of earth pressure: $k_a = 0.35$; $k_p = 5.00$

Total weight = $W_1 + W_2 + W_3 = W_T$
 $W_T = (1.0 \cdot 0.50 \cdot 3.00 \cdot 2.3) + (1.0 \cdot 3.0 \cdot 3.0 \cdot 2.3) + (1.0 \cdot 2.5 \cdot 3.0) = 36.90 t$

Factor of safety against uplift = $\frac{36.90}{17.91} = 2.06 > 2.0.$

Weight acting on the bottom = W_R
 $W_R = W_T - W_{uplift} = 36.90 - 17.91 = 18.99.$

Frictional resistance F. R. = $W \cdot \mu = 18.99 \cdot 0.52 = 9.87 t$

Resistance force due to earth pressure:

$T_{ult.} = L (E_p - E_a) + \frac{1}{3} \cdot k_o \gamma (\sqrt{k_p} + \sqrt{k_a}) H^3 \tan \phi$

$E_a = \frac{1}{2} \cdot k_a \cdot \gamma \cdot H^2 = \frac{1}{2} \cdot 0.35 \cdot 1.7 \cdot 3^2 = 2.68 t/m'$

$E_p = \frac{1}{2} \cdot k_p \cdot \gamma \cdot H^2 = \frac{1}{2} \cdot 5.00 \cdot 1.7 \cdot 3^2 = 38.25 t/m'$

$T_{ult.} = 3.0 (38.25 - 2.68) + \frac{1}{3} \cdot 0.4 \cdot 1.7 (\sqrt{5} + \sqrt{0.35}) 3^2 \cdot \tan 30^\circ$

$T_{ult.} \leq 112.478 t$

minimum length of ground surface in front of the foundation = $1.5 \cdot H \sqrt{k_p} = 1.5 \cdot 3 \cdot \sqrt{5} = 1.5 \cdot 6.71 = 10.07 m.$
 safety factor


length of ground surface in back of the foundation = $H \sqrt{k_a} = 3.0 \sqrt{0.35} = 1.77 m$

Total horizontal resistance = H. R.

$H.R. = T_{ult.} + F.R. = \frac{112.478}{1.5} + 9.87 = 84.765$

Factor of safety against sliding = $\frac{HR}{T_H}$

$F.S. = \frac{84.765}{35.77} = 2.37 > 2.0$

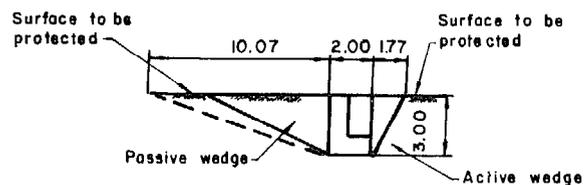

S A T A , Swiss Association for Technical Assistance

STRUCTURAL ANALYSIS

Calculation example for a deadman used as wind guy anchorage


No. : 3.803

Date : 15th March 77

Sig. : *Jan Ploffen*

CAPACITY OF THE DEADMAN

$\phi = 25^\circ$ $K_p = 3,78$ (p. 3.804)
 $\gamma = 1700 \text{ kg/m}^3$ $K_a = 0,441$ (p.3.804)
 $K_o = 0,40$

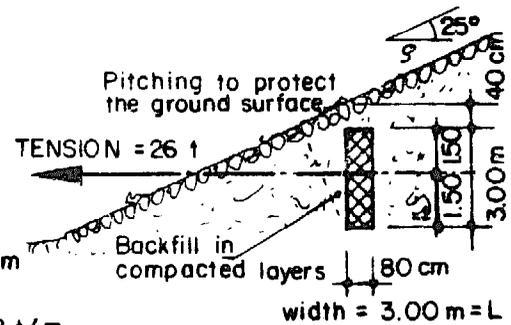

$$T_{ult} \leq L(E_p - E_a) + \frac{1}{3} \cdot K_o \cdot \gamma \cdot (K_p - K_a) \cdot H^3 \cdot \tan \phi$$

$$E_a = \frac{K_a \cdot \gamma \cdot 0,4 \text{ m} + K_a \cdot \gamma \cdot 3,40 \text{ m}}{2} \cdot 3,00 \text{ m} = 4,273 \text{ t/m} \quad (12,819 \text{ t})$$

$$E_p = \frac{K_p \cdot \gamma \cdot 0,4 \text{ m} + K_p \cdot \gamma \cdot 3,40 \text{ m}}{2} \cdot 3,00 \text{ m} = 36,6282 \text{ t/m} \quad (109,8846 \text{ t})$$

$$T_{ult} \leq 3,0(36,6282 - 4,273) + \frac{1}{3} \cdot 0,4 \cdot 1,7 \cdot (\sqrt{3,78} - \sqrt{0,441}) \cdot \frac{0,4 + 3,4}{2} \cdot 3,0 \cdot 0,5774$$

$$T_{ult} \leq 97,0656 + 0,2266 \cdot (1,2801439) \cdot 1,9 \cdot 3,0 \cdot 0,5774 = 97,0656 + 1,123516 = 98,189116 \text{ t}$$

say : $T_{ult} \leq 98 \text{ tons}$


DEADMAN RESISTANCE taken into account = $\frac{98 \text{ tons}}{\text{factor of safety} = 1,5} = 65,33 \text{ tons}$

Factor against sliding = $\frac{\text{red. deadman's capacity}}{\text{tension guy}} = \frac{65,33}{26} = 2,51 > 2 \quad \text{O.K.}$

Theoretical stability = safety factor \cdot safety factor = $1,5 \cdot 2,51 = 3,765 = \text{t.s.f.}$

Due to the unsafe soil information, execution and backfilling it is recommended to get rather high safety figures.

DIMENSIONING OF THE REINFORCED CONCRETE SHIELD (deadman)

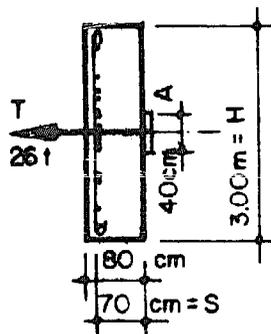

$$\text{max. Moment} = \frac{T(H-A)}{8} = \frac{26(3,0-0,4)}{8} = 8,45 \text{ mt}$$

$$\text{max. Shearing} = \frac{T(H-A)}{2 \cdot H \cdot 0,9 \cdot S \cdot H} = \frac{26(3,0-0,4)}{2 \cdot 3 \cdot 0,9 \cdot 0,7 \cdot 3} = 5,9612 \text{ t/m}^2$$

$$\text{max. Shearing} = 0,60 \text{ kg/cm}^2 \quad \text{O.K.}$$

Because of the modulus of foundation and the difference of the soil bearing on the bottom and top face, however, the dimensioning of reinforcement should be done by taking the max. moment twice into consideration.

$$\text{Reinforcement required} = \frac{\text{Moment}}{0,9 \cdot S \cdot \sigma_{R_{all}}} = \frac{2 \cdot 8,45}{0,9 \cdot 0,7 \cdot 1,4} = 19,161 \text{ cm}^2$$


say : $14 \phi 14 \text{ mm} \hat{=} 21,56 \text{ cm}^2 > 19,161 \text{ cm}^2 \hat{=} 100\%$

The reinforcement should be placed crosswise - i.e. total $28 \phi 14 \text{ mm}$

REINFORCEMENT			
	percentage	area req.	pieces
8 gradations	6 %	1,15 cm ²	1 ϕ 14
	8 %	1,53 cm ²	1 ϕ 14
	13 %	2,49 cm ²	2 ϕ 14
	23 %	4,40 cm ²	3 ϕ 14
	23 %		3 ϕ 14
	13 %		2 ϕ 14
	8 %		1 ϕ 14
	6 %		1 ϕ 14

$$\text{Total} = 100\% = 14 \phi 14 = 21,56 \text{ cm}^2$$

To get no overturning moment with reference to point A, the tensile force might be anchored as follows:

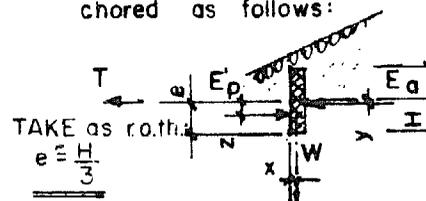

note worth :
 While taking $E_p = T_{ult}$ the results will be absurd
 $\therefore E_p = \frac{E_p}{\text{t.s.f.}}$


$$(E_p' \cdot z) - (E_a \cdot y) - W \cdot x = 0$$

neglecting the weight of the soil above the deadman

SATA, Swiss Association for Technical Assistance

Calculation example for a main anchor block of a suspended bridge taking the passive earth resistance into account

EXAMPLE FOR CALCULATION OF A MAIN ANCHOR BLOCK FOR A SUSPENDED BRIDGE TAKING THE PASSIVE EARTH RESISTANCE INTO ACCOUNT

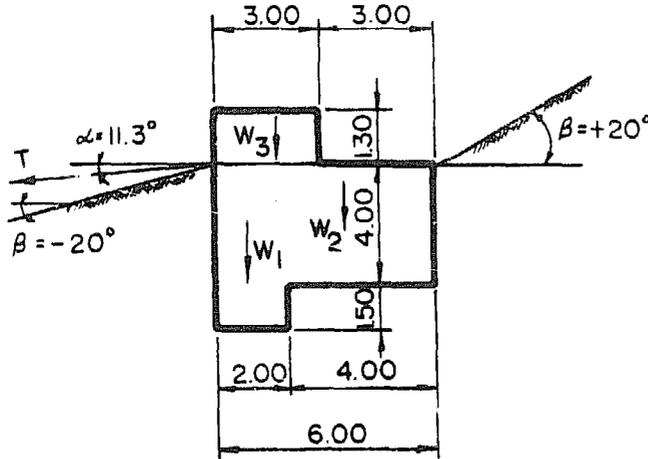

Cell-type foundation ... = 2 t/m³
 Width ... = 5.00m.
 Gangway ... = 1.90m.
 T ... = 130 tons.
 $T_V = T \cdot \sin \alpha$... = 25.47t.
 $T_H = T \cdot \cos \alpha$... = 127.48t.

Trench excavation needed

- Soil quality = $\rho = 30^\circ$ Soil = 1.9 t/m³
- Coefficient of friction = 0.9 tan $\rho = 0.52$
- Permissible pressure = 3 kg/cm²
- Weight of the foundation

$$W_1 = 2.0 \cdot 5.5 \cdot 5.0 \cdot 2.0 = 110.00t.$$

$$W_2 = 4.0 \cdot 4.0 \cdot 5.0 \cdot 2.0 = 160.00t.$$

$$W_3 = 3.0 \cdot 1.3 (5.0 - 1.9) \cdot 2.0 = 31.98t$$

$$W_T = 301.98t$$

Eccentricity of the foundation

$$e = \frac{W_1 \cdot 1.0 + W_2 \cdot 3.0 + W_3 \cdot 1.5}{301.98} = \frac{110.00 + 480.00 + 47.97}{301.98} = 2.11m.$$

Calculation of the acting forces etc.

Passive and active earth pressure coefficient (ground surface = $\beta = 20^\circ$)

Description	Soil in place ($\beta = 20^\circ$)					
	25°	27.5°	30°	32.5°	35°	37.5°
angle internal friction ρ	25°	27.5°	30°	32.5°	35°	37.5°
coefficient of active earth pressure K_a	0.572	0.500	0.441	0.389	0.344	0.303
coefficient of passive earth pressure K_p	2.78	3.22	3.78	4.44	5.36	6.55

STRUCTURAL ANALYSIS

No : 3.605

Calculation example for a main anchorage block of a suspended bridge taking the passive earth resistance into account (continuation)

Date : 24th Jan. 77

Sig : *for P. H. K.*

Passive earth pressure = $\frac{1}{2} \cdot \gamma \cdot k_p \cdot H^2 = 0.5 \cdot 1.9 \cdot 3.78 \cdot 5.5^2 = 108.63 \text{ t}$
 Total passive earth pressure = $5.0 \cdot 108.63 = 543.15 \text{ t}$
 $E_{PH} = 543.15 \cdot \cos(45 - \varphi) = 524.64 \text{ t}$
 Active earth pressure = $\frac{1}{2} \cdot \gamma \cdot k_a \cdot H^2 = 0.5 \cdot 1.9 \cdot 0.441 \cdot 5.5 = 12.67 \text{ t}$
 Total active earth pressure = $5.0 \cdot 12.67 = 63.37 \text{ tons}$
 $E_{aH} = 63.37 \cdot \cos(45 - \varphi) = 61.21 \text{ t}$

Stability against overturning

$\Sigma V = \Sigma W + T_v = 301.98 + 25.47 = 327.45$

Moment about A

$M_{\text{overturning}} = 127.48 \cdot 5.5 + 61.21 \cdot 1.83$
 $= 813.15 \text{ mt}$

$M_{\text{stabilizing}} = \frac{524.64 \cdot 1.83 + 301.99 \cdot 2.11}{1.5}$
 $= 1277.24 \text{ mt}$

Safety against overturning = $\frac{1277.24}{813.15}$
 $= 1.57 > 1.5$

- Stability against sliding

$\Sigma H_{\text{sliding}} = 127.48 + 61.21 = 188.69$ safety factor = 1.5

$\Sigma H_{\text{stabilizing}} = \frac{1}{1.5} \cdot E_{PH} + \Sigma V \cdot \mu = \frac{1}{1.5} \cdot 524.64 + 327.45 \cdot 0.52 = 520.03$

Safety against sliding = $\frac{520.03}{159.08} = 3.27 > 1.50$

Max. soil bearing


$b = \frac{\text{Moment stabilizing} - \text{Moment overturning}}{\Sigma V}$

$b = \frac{1277.24 - 813.15}{327.45} = 1.42 \text{ m}$

max. soil bearing = $\sigma_{\text{max}} = \frac{2 \cdot \Sigma V}{3 \cdot b - \text{Width of the foundation}}$


$\sigma_{\text{max}} = \frac{2 \cdot 327.450}{3 \cdot 1.42 - 5.00} = 3.07 \text{ kg/cm}^2 \cong 3 \text{ kg/cm}^2$

Ground - Surface to be protected.

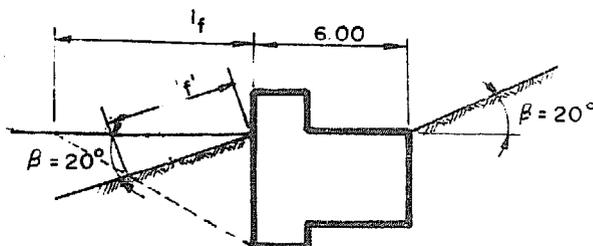


safety factor
 $l_f = 1.5 \cdot H \cdot \sqrt{k_p} = 1.5 \cdot 5.5 \cdot \sqrt{3.78} = 16.03 \text{ m}$

$l'_f = l_f \cdot \cos \beta = 15.22 \text{ m}$


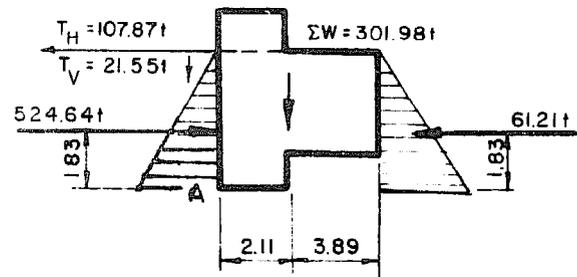


$e = 1.58 > \frac{1}{6} = 1.00$

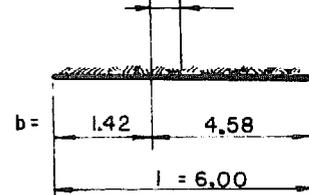

DOUBLE ECCENTRIC LOADING


The chart below is very useful by calculating the max. soil bearing (max. contact pressure). It is out of the scope of this manual to explain the theory, but reference to the books about soil mechanics may be made by the reader himself. There are two well known ways to calculate the max. soil bearing, either with the chart below or with the next page of "coefficients for calculating the max. soil bearing of bi-axial and eccentric compressed foundations".

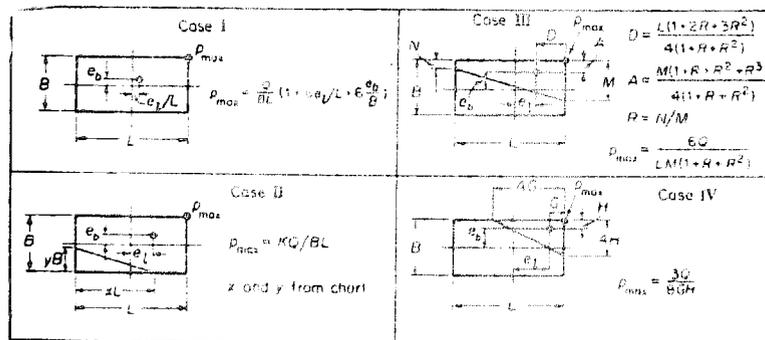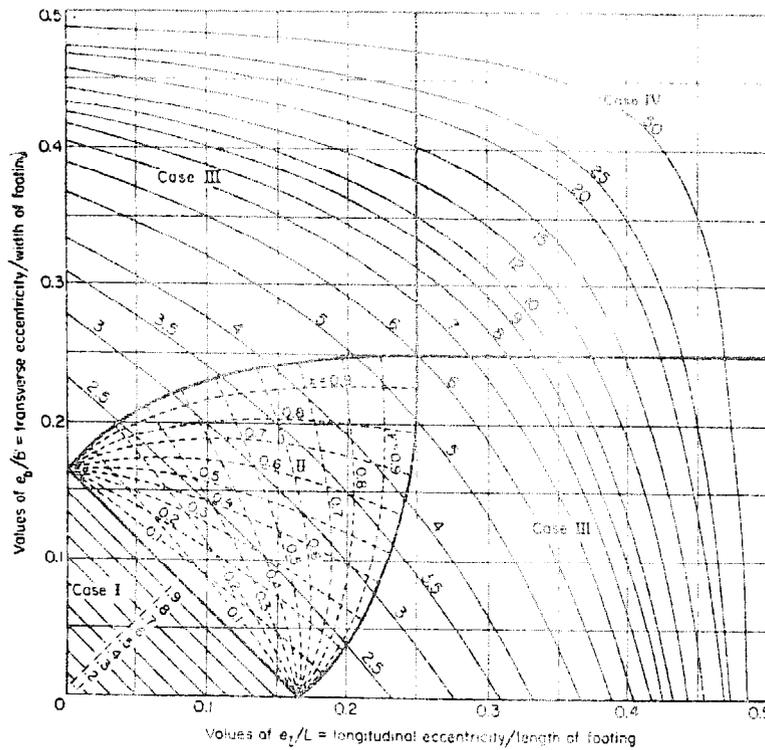

Rectangular footing, double eccentricity

Source : Wayne C. Teng : Foundation design, Teng Associates, USA, 1974

COEFFICIENTS FOR CALCULATING THE MAX. SOIL BEARING OF BI-AXIAL AND ECCENTRIC COMPRESSED FOUNDATION

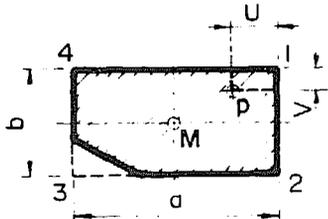

$$\max \sigma = z \cdot \frac{\Sigma V (P)}{2u \cdot 2v} \leq \text{permissible pressure}$$

Example:

$a = 2.00 \text{ m}, \quad u = 0.50 \text{ m}, \quad \Sigma V = 26 \text{ tons}$
 $b = 3.00 \text{ m}, \quad v = 1.00 \text{ m}, \quad \text{permissible pressure} = 2 \text{ Kg/cm}^2$
 $\frac{u}{a} = \frac{0.50}{2.00} = 0.25; \quad \frac{v}{b} = \frac{1.00}{3.00} = 0.33; \quad z = 1.48$
 $\text{max. soil bearing} = 1.48 \cdot \frac{26000}{2 \cdot 50 \cdot 2 \cdot 100} = 1.924 < 2.0 \text{ Kg/cm}^2$



Z - Factors

V/b	U/a																	V/b		
	0.00 to 0.16	0.18	0.20	0.22	0.24	0.26	0.28	0.30	0.32	0.34	0.36	0.38	0.40	0.42	0.44	0.46	0.48		0.50	
0.00	Point 1	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.49	1.48	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.00
to 0.16	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.49	1.48	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	to 0.16
0.18	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.49	1.48	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.18
0.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.49	1.48	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.20
0.22	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.48	1.48	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.22	
0.24	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.48	1.48	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.24	
0.26	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.48	1.48	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.26	
0.28	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.48	1.48	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.28	
0.30	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.49	1.48	1.47	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.30	
0.32	1.49	1.49	1.49	1.49	1.48	1.48	1.48	1.48	1.48	1.47	1.46	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.32	
0.34	1.48	1.48	1.48	1.48	1.48	1.48	1.48	1.48	1.47	1.47	1.45	1.45	1.43	1.42	1.40	1.38	1.36	1.33	0.34	
0.36	1.46	1.46	1.46	1.46	1.46	1.46	1.46	1.46	1.46	1.45	1.45	1.44	1.43	1.42	1.40	1.38	1.35	1.33	0.36	
0.38	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.44	1.44	1.43	1.42	1.41	1.39	1.37	1.34	1.31	0.38	
0.40	1.43	1.43	1.43	1.43	1.43	1.43	1.43	1.43	1.43	1.43	1.43	1.42	1.41	1.40	1.38	1.35	1.32	1.28	0.40	
0.42	1.42	1.42	1.42	1.42	1.42	1.42	1.42	1.42	1.42	1.42	1.42	1.41	1.40	1.38	1.36	1.33	1.29	1.24	0.42	
0.44	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.40	1.39	1.38	1.36	1.33	1.30	1.25	1.20	0.44	
0.46	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.38	1.37	1.35	1.33	1.30	1.25	1.20	1.20	0.46	
0.48	1.36	1.36	1.36	1.36	1.36	1.36	1.36	1.36	1.36	1.36	1.36	1.35	1.34	1.32	1.29	1.25	1.20	1.20	0.48	
0.50	1.33	1.33	1.33	1.33	1.33	1.33	1.33	1.33	1.33	1.33	1.33	1.33	1.31	1.28	1.24	1.20	1.20	1.25	0.50	

For the zone beneath the upper zick-zack line the centre of the foundation lies in the compressed part of the section, for the zone on the right lower corner the point of application lies in the middle third of the foundation section.

Source : Stahl im Hochbau, Verlag Stahleisen M.F.M., Duesseldorf, West Germany. (13.11)

CALCULATION EXAMPLE FOR A PYLON FOUNDATION

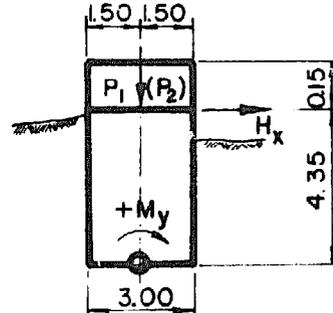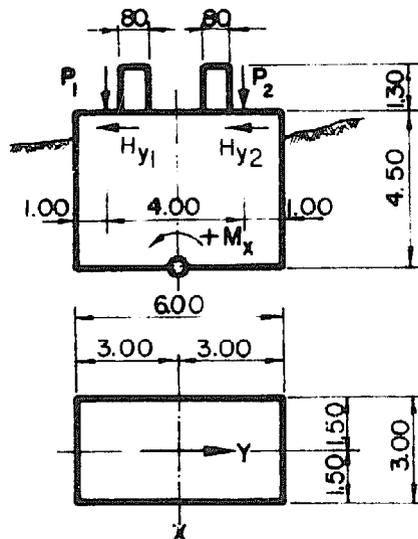

Loading cases	P ₁	P ₂	H _{y1}	H _{y2}	H _x
Case 1	46	-10	3.1	3.3	15
Case 2	50	43	0.1	0.5	3.7

Case 1: Full wind and some load.
Case 2: Full load and some wind.

Soil conditions

- Max. soil bearing $\sigma_{max} = 3.5 \text{ kg/cm}^2$
- Coefficient of friction $\mu = 0.44$
- Weight of soil $\gamma = 1.90 \text{ t/m}^3$
- Coeff. of active earth pressure $k_a = 0.35$
- Angle of repose $= 26^\circ$

Weight of the foundation.


$$W_1 = 6.0 \cdot 4.50 \cdot 3.0 \cdot 2.2 = 178.20 \text{ t}$$

$$W_2 = 2(1.3 \cdot 3.0 \cdot 0.8 \cdot 2.2) = 13.73 \text{ t}$$

$$\text{Total} = 191.95 \text{ t}$$

$$\text{Volume} = 87.25 \text{ m}^3$$

Earth pressure.

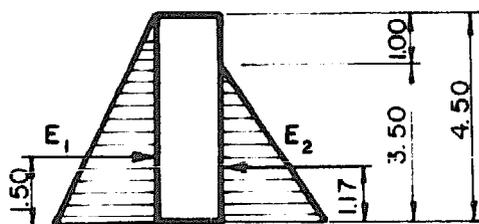

$$E = \frac{1}{2} \cdot \gamma \cdot k \cdot H^2$$

$$E_1 = \frac{1}{2} \cdot 1.9 \cdot 0.35 \cdot 4.5^2 = 6.73 \text{ t/m}^1$$

$$E_2 = \frac{1}{2} \cdot 1.9 \cdot 0.35 \cdot 3.5^2 = 4.07 \text{ t/m}^1$$

$$E_{1 \text{ Total}} = 6.73 \cdot 6.00 = 40.38 \text{ t}$$

$$E_{2 \text{ Total}} = 4.07 \cdot 6.00 = 24.42 \text{ t}$$

STRUCTURAL ANALYSIS

Calculation example for a Pylon foundation
(continuation)

No : 3.904

Date : 24th Jan. 77

Sig : *[Signature]*

Loading case 1 (full wind, some load)

$$H_x = E_1 + H_x - E_2 = 40.38 + 15.00 - 24.42 = 30.96t$$

$$H_y = -H_{y_1} - H_{y_2} = -3.1 - 3.3 = -6.4t$$

$$M_x = (H_{y_1} + H_{y_2}) \cdot 4.5 + P_1 \cdot 2.0 - P_2 \cdot 2.0 = (3.1 + 3.3) \cdot 4.5 + 46.0 \cdot 2.0 - (-10) \cdot 2.0 = 140.80mt$$

$$M_y = E_1 \cdot 1.50 - E_2 \cdot 1.17 + H_x \cdot 4.35 = 40.38 \cdot 1.5 - 24.42 \cdot 1.17 + 15.0 \cdot 4.35 = 97.25mt$$

Eccentricities

$$e_x = \frac{\sum My}{\sum V} = \frac{97.25}{191.95 + 46 - 10} = 0.43m \quad e_y = \frac{\sum Mx}{\sum V} = \frac{140.80}{191.95 + 46 - 10} = 0.62m$$

Max. soil bearing

Refer to Chapter: Coefficient for calculating the max. soil bearing of bi-axial and eccentric compressed foundations. (3.902)

$$U = 3.0 - 0.62 = 2.38m \quad U/a = 2.38/6.0 = 0.40$$

$$V = 1.5 - 0.43 = 1.07m \quad V/b = 1.07/3.0 = 0.36$$

$$Z = 1.43 \quad \text{max. soil bearing } \sigma_{max} = Z \cdot \frac{\sum V(P)}{2U \cdot 2V}$$

$$\sigma_{max} = 1.43 \cdot \frac{227950}{2 \cdot 2.38 \cdot 2 \cdot 1.07} = 1.43 \cdot 2.24 = 3.20kg/cm^2 < 3.5 Kg/cm^2$$

Loading case 2 (full load, some wind)

$$H_x = E_1 + H_x - E_2 = 40.38 + 3.7 - 24.42 = 19.66t$$

$$H_y = -H_{y_1} - H_{y_2} = -0.1 - 0.5 = -0.6t$$

$$M_x = (H_{y_1} + H_{y_2}) \cdot 4.5 + P_1 \cdot 2.0 - P_2 \cdot 2.0 = (0.1 + 0.5) \cdot 4.5 + 50.0 \cdot 2.0 - 43 \cdot 2.0 = 16.7mt$$

$$M_y = E_1 \cdot 1.50 - E_2 \cdot 1.17 + H_x \cdot 4.35 = 40.38 \cdot 1.5 - 24.42 \cdot 1.17 + 3.7 \cdot 4.35 = 48.09mt$$

Eccentricities

$$e_x = \frac{48.09}{191.95 + 50 + 43} = 0.17m \quad e_y = \frac{16.70}{191.95 + 50 + 43} = 0.06m$$

Max. soil bearing

$$U = 3.0 - 0.06 = 2.94m$$

$$U/a = 2.34/6.0 = 0.39$$

$$V = 1.5 - 0.17 = 1.33m$$

$$V/b = 1.33/3.0 = 0.44$$

$$Z = 1.385$$

$$\text{Max. soil bearing } \sigma_{max} = 1.385 \cdot \frac{284950}{2 \cdot 2.94 \cdot 2 \cdot 1.33} = 1.385 \cdot 1.822 = 2.52kg/cm^2 < 3.5kg/cm^2$$

STRUCTURAL ANALYSIS

Calculation example for a Pylon foundation
(2nd continuation)


No. : 3.905

Date : 24th Jan. 77

Sig : *[Signature]*

Safety against sliding

$$S.F. = \frac{\text{min. } \Sigma V \cdot \text{coefficient of friction}}{\text{max. } \Sigma H} = \frac{227 \cdot 0.44}{30.96} = 3.23 > 1.5 \quad \boxed{\text{if horizontal}}$$

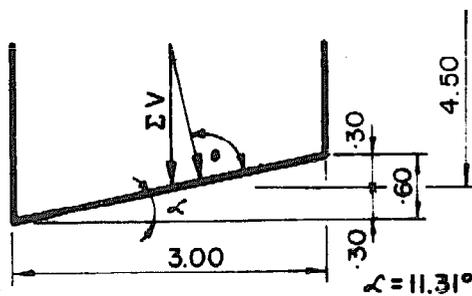


Example safety factor for a inclined bottom

$$S.F. = \frac{\text{min. } \Sigma V (\text{Cos } \alpha \cdot \tan 26^\circ + \text{Sin } 11.31)}{\text{max. } H \cdot \text{Cos}}$$

$$S.F. = \frac{227 (\text{Cos } 11.31 \cdot \tan 26^\circ + \text{Sin } 11.31)}{30.96 \cdot \text{Cos } 11.31} = 5.04 > 1.5 \quad \boxed{\text{if inclined}}$$

Safeties against overturning

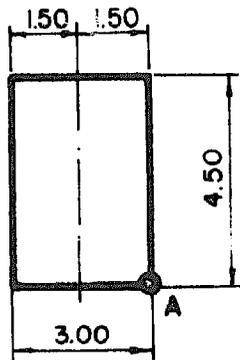

$$S.F. = \frac{\text{max. overturning moment}}{\text{min. stabilizing moment}}$$


$$M_o = 15.0 \cdot 4.35 + 40.38 \cdot 1.50$$

$$M_o = 125.82 \text{ mt}$$

$$M_{st} = 191.95 \cdot 1.5 + 24.42 \cdot 1.17 + 36 \cdot 1.5$$

$$M_{st} = 371.67 \text{ mt}$$

$$S.F. = \frac{371.67}{125.82} = 2.95 > 1.5$$

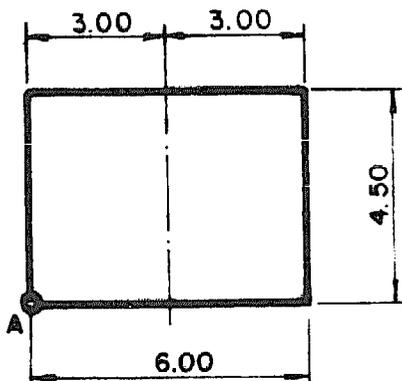

$$M_o = 6.4 \cdot 4.5 + 10 \cdot 5.0 = 78.80 \text{ mt}$$

$$M_{st} = 3.0 \cdot 191.95 + 46 \cdot 1.00 = 521.85 \text{ mt}$$

$$S.F. = \frac{521.85}{78.80} = 6.62 > > 1.5$$

STRUCTURAL ANALYSIS



Calculation example for an anchor block used as windguy and side stay cable anchorage

No : 3.906

Date : 24th. Jan. 77

Sig : *[Signature]*

CALCULATION EXAMPLE FOR AN ANCHOR BLOCK USED AS WINDGUY AND SIDE STAY CABLE ANCHORAGE

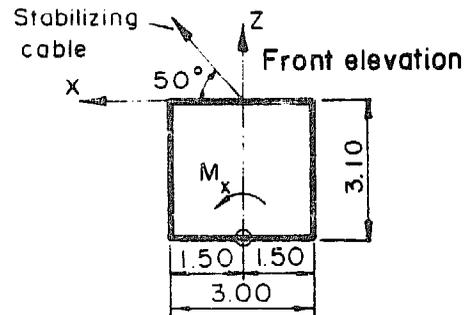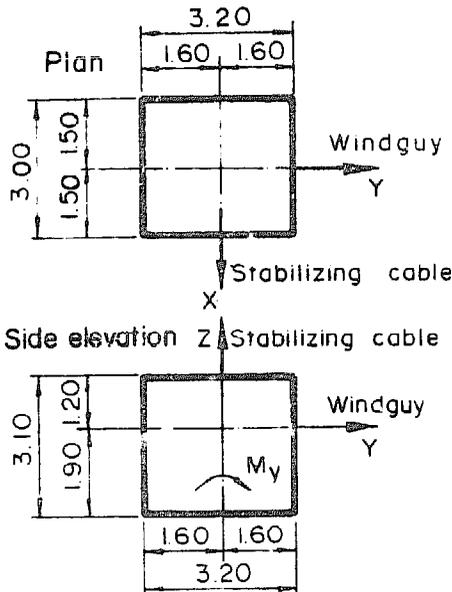

Forces :

Description	Case 1	Case 2
Windguy H_y	18 tons	3.0 tons
Stabilizing H_x	1.9 tons	2.3 tons
cable V_z	3.3 tons	2.7 tons

Case 1 : Full wind, some load
Case 2 : Full load, some wind

Soil condition = factor of friction = 0.45
max. soil bearing = 2.0 Kg/cm²

The ground surface around the foundation is horizontal, therefore the active earth pressure resulting from the backfilling is assumed as equal i.e. we are calculating without taking any earth pressure into account.

Weight of the foundation

$W_T = 3.2 \cdot 3.1 \cdot 3.0 \cdot 2.2 = 65.472 \text{ tons}$; Volume = 29.76 m³

Loading Case 1 (Full wind, some load)

$H_x = 1.9 \text{ tons}$; $H_y = 18 \text{ tons}$; $M_x = H_x \cdot 3.10 = 1.9 \cdot 3.10 = 5.89 \text{ mt}$
 $M_y = H_y \cdot 1.90 = 18.0 \cdot 1.9 = 34.20 \text{ mt}$

Eccentricities

$\Sigma V = W_T - V_z = 65.472 - 3.3 = 62.172 \text{ tons}$; $e_x = \frac{\Sigma M_y}{\Sigma V} = \frac{34.20}{62.172} = 0.550 \text{ m}$
 $e_y = \frac{\Sigma M_x}{\Sigma V} = \frac{5.89}{62.172} = 0.095 \text{ m}$

max. soil bearing

Refer to page 3.902: Coefficients for calculating the max. soil bearing of bi-axial and eccentric compressed foundations.

$u = 1.60 - 0.095 = 1.505$; $u/a = 1.505 / 3.20 = 0.47$
 $v = 1.50 - 0.550 = 0.950$; $v/b = 0.950 / 3.00 = 0.32$

$z = 1.37$; max. soil bearing = $\sigma_{max} = z \cdot \frac{\Sigma V(P)}{2u \cdot 2v}$
 $\sigma_{max} = 1.37 \cdot \frac{62172}{2 \cdot 1505 \cdot 2 \cdot 95} = 1.49 \text{ Kg/cm}^2 < 2.0 \text{ Kg/cm}^2$

STRUCTURAL ANALYSIS

Calculation of an anchor block used in a stay
side stay cable anchorage (continuation)

No : 0.807

Date : 21st Dec. 77

Sig : *[Signature]*

Loading Case 2 (Full load, some wind)

$H_x = 2.3 \text{ tons}; H_y = 3.0 \text{ tons}; M_x = H_x \cdot 3.1 = 2.3 \cdot 3.1 = 7.13 \text{ mt}$
 $M_y = H_y \cdot 1.9 = 3.0 \cdot 1.9 = 5.70 \text{ mt}$

Eccentricities

$\Sigma V = W_T - V_z = 65.472 - 2.7 = 62.772 \text{ tons}, e_x = \frac{\Sigma M_y}{\Sigma V} = \frac{5.70}{62.772} = 0.091 \text{ m}$
 $e_y = \frac{\Sigma M_x}{\Sigma V} = \frac{7.13}{62.772} = 0.114 \text{ m}$

max. soil bearing

$u = 1.60 - 0.091 = 1.509$ $u/a = 1.509 / 3.2 = 0.47$
 $v = 1.50 - 0.114 = 1.386$ $v/b = 1.386 / 3.0 = 0.46$
 $z = 1.2125$ $\text{max soil bearing } \sigma_{\text{max}} = z \cdot \frac{\Sigma V(P)}{2u \cdot 2v}$
 $\sigma_{\text{max}} = 1.2125 \cdot \frac{62772}{2 \cdot 150.9 \cdot 2 \cdot 138.6} = 0.91 \text{ Kg/cm}^2 < 2.0$

Safety against sliding

Horizontal forces $F_H = \sqrt{H_x^2 + H_y^2}$ Vertical weight = Dead load - $V_z = W_T$

Case 1 (Full wind, some load)

$F_H = \sqrt{1.9^2 + 18.0^2} = 18.1 \text{ tons}$ $W_T = 65.472 - 3.3 = 62.172 \text{ tons}$

Safety against sliding = $\frac{W_T \cdot \text{factor of friction}}{F_H}$


Safety factor = $\frac{62.172 \cdot 0.45}{18.1} = 1.55 > 1.5$

Case 2 (Full load, some wind)

$F_H = \sqrt{2.3^2 + 3.0^2} = 3.78 \text{ tons}$ $W_T = 65.472 - 2.7 = 62.772 \text{ tons}$

Safety factor = $\frac{62.772 \cdot 0.45}{3.78} = 7.47 \gg 1.5$

Safety against overturning

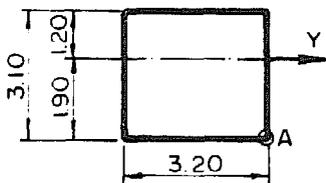


S.F. = $\frac{\text{max. overturning moment}}{\text{min. stabilizing moment}}$

$M_o = H_y \cdot 1.9 + V_z \cdot 1.6 = 18.0 \cdot 1.9 + 3.3 \cdot 1.6 = 39.48 \text{ mt}$

$M_{st} = W \cdot 1.6 = 65.472 \cdot 1.6 = 104.75 \text{ mt}$

S.F. = $\frac{104.75}{39.48} = 2.73 > 1.5$

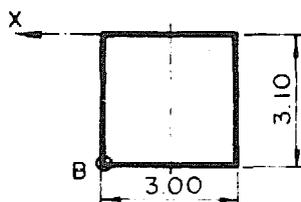

S.F. = $\frac{\text{max. overturning moment}}{\text{min. stabilizing moment}}$

$M_o = H_x \cdot 3.1 + V_z \cdot 1.5 = 2.3 \cdot 1.9 + 2.7 \cdot 1.5 = 11.18 \text{ mt}$

$M_{st} = W \cdot 1.5 = 65.472 \cdot 1.5 = 98.208 \text{ mt}$


S.F. = $\frac{98.208}{11.18} = 8.78 \gg 1.5$

S.A.P.A., Swiss Association for Technical Assistance

DIMENSIONING IN REINFORCED CONCRETE CONSTRUCTION
TAKING THE AXIAL FORCE INTO ACCOUNT

$M_e = M - N \cdot e$, Tensile force = N (positive), Compression force = N (negative)

In the rectangular section $e = h - \frac{d}{2}$




In case N acts as tensile force (+) still within the reinforcement, i.e. $c < e$

$$F_{e1} = \frac{N}{\sigma_e} \cdot \frac{e+c}{2e} \quad F_{e2} = \frac{N}{\sigma_e} \cdot \frac{e-c}{2e} \quad \text{for the}$$

tensile force action directly at the centre

$$F_{e1} = F_{e2} = \frac{N}{2e}$$

Rectangular section for uniaxial bending (with or without taking the axial force into account)

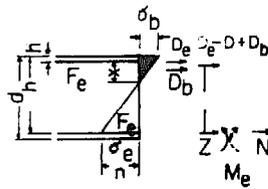

(the neutral fibre coincides with the main axis of the section)

Designation:

$$m = \frac{\sigma_e}{\sigma_b}; \quad n = \frac{E_a}{E_b} = 15; \quad x = k_x \cdot h; \quad k_x = \frac{n}{n+m}$$

$$z = k \cdot h; \quad h' = \beta \cdot h; \quad \mu = \frac{F_e}{b \cdot h}; \quad \mu = \frac{F_e}{b \cdot h}$$

For the calculation of various problems concerning the dimensioning in Building construction, where the deformation is mainly the binding, the permissible stress for the steel has been fixed as σ_e . In order to reduce the volume of calculation one can use the corresponding table for every permissible stress of steel.

Section without any compression reinforcement

$$h = k_h \sqrt{\frac{M_e}{b}} \dots 4 \quad h \text{ in cm, } M \text{ in mt, } b \text{ in m}$$

In case the k_h -value obtained from the above formula \geq that of k_h^* given in the table I for the given σ_b , there is no need of

$$F_e = \frac{M_e}{h} \cdot K_e + \frac{N}{e}, \dots [2]$$

$$\text{For mainly bending cases } F_e = \frac{M}{h} K_e \dots [2a]$$

F_e in cm^2 ; M_e in mt; h in m; N in t

σ_e in t/cm^2 ; M in mt.

The K_e -values / which corresponds to the next smaller recomend value of K_h will be taken from the table I.

Section with compression reinforcement

In case the K_n - value obtained from the formula 1 is smaller than that of K_h given in the table 1, there is need of compression reinforcement.

Tension reinforcement and the equation 2 and 2a, K - value like in table 2, starting with σ_b and K_h

Compression reinforcement

$F_e = \frac{M_e}{h} K_e$ (for $\beta < 0.08$), $F_e = \frac{M_e}{h} K_e f'$ (for $\beta \leq 0.08$)

Dimensions as in the equation, K_e' as K_e from the table 2, for $\beta = \frac{h'}{h}$ from the table 3

TABLE 1

Recommended values K_h and K_h' coefficients K_e and K_e'									
σ_b Kg/cm ²	for $\sigma_e = 1.200 \text{ t/cm}^2$			for $\sigma_e = 1.400 \text{ t/cm}^2$			for $\sigma_e = 2.200 \text{ t/cm}^2$		
	K_h and K_h'	K_e	K_z	K_h and K_h'	K_e	K_z	K_h and K_h'	K_e	K_z
20	23.1	0.89	0.93	—	—	—	—	—	—
30	16.4	0.92	0.91	17.3	0.78	0.92	20.4	0.48	0.94
35	14.5	0.93	0.90	—	—	—	—	—	—
40	13.0	0.94	0.89	13.6	0.79	0.90	15.9	0.49	0.93
45	11.8	0.95	0.88	—	—	—	—	—	—
50	10.9	0.96	0.87	11.4	0.81	0.88	13.1	0.50	0.92
60	—	—	—	9.9	0.82	0.87	11.3	0.50	0.90
70	—	—	—	8.8	0.83	0.86	10.0	0.51	0.89
80	—	—	—	8.0	0.84	0.85	9.0	0.52	0.88

TABLE 2

Coefficients ρ'															
$\beta = \frac{h'}{h}$	for $\sigma_e = 1.200 \text{ t/m}^2$					for $\sigma_e = 1.400 \text{ t/m}^2$					for $\sigma_e = 2.200 \text{ t/m}^2$				
	σ_b					σ_b					σ_b				
	40	50	-	-	-	50	60	70	80	-	50	60	70	80	
0.08	1.05	1.04	-	-	-	1.05	1.04	1.04	1.04	-	1.07	1.06	1.05	1.05	
0.09	1.11	1.09	-	-	-	1.10	1.09	1.08	1.08	-	1.15	1.12	1.10	1.10	
0.10	1.17	1.14	-	-	-	1.16	1.14	1.13	1.12	-	1.23	1.20	1.17	1.15	
0.11	1.23	1.20	-	-	-	1.22	1.19	1.18	1.17	-	1.34	1.28	1.24	1.22	
0.12	1.30	1.26	-	-	-	1.29	1.25	1.23	1.21	-	1.45	1.37	1.32	1.28	
0.14	1.47	1.39	-	-	-	1.44	1.38	1.34	1.32	-	1.74	1.59	1.49	1.44	
0.16	1.68	1.53	-	-	-	1.64	1.54	1.46	1.42	-	2.17	1.87	1.72	1.62	
0.20	2.30	1.89	-	-	-	2.18	1.95	1.82	1.74	-	3.95	2.84	2.39	2.15	

S A T A , Swiss Association for Technical Assistance

STRUCTURAL ANALYSIS

Dimensioning in reinforced construction
taking the axial compression force into account
(2nd continuation)

No. : 3.910

Date : 20th Febr. 77

Sig : *Hok*

TABLE 3

Coefficients K_e and K_e

σ_e for $\sigma_e = 1.200 \text{ t/m}^2$												σ_e for $\sigma_e = 1.400 \text{ t/m}^2$												σ_e for $\sigma_e = 2.200 \text{ t/m}^2$											
40				50				60				70				50				60				70											
in %	K_e	K_e	K_e	in %	K_e	K_e	K_e	in %	K_e	K_e	K_e	in %	K_e	K_e	K_e	in %	K_e	K_e	K_e	in %	K_e	K_e	in %	K_e	K_e	K_e	in %	K_e	K_e	K_e					
13.0	94	11.2	58	11.0	96	9.2	51	81	10.0	82	9.0	83	9.0	83	13.0	03	50	11.4	10.0	82	9.0	83	13.0	03	50	11.4	10.0	82	9.0	83					
12.9	03	11.1	61	10.9	01	9.1	54	94	9.9	03	8.9	01	8.8	01	12.9	06	50	11.3	9.8	03	8.9	01	12.9	06	50	11.3	9.8	03	8.9	01					
12.8	07	10.9	67	10.8	04	9.0	56	95	11.3	03	8.9	03	8.3	03	12.8	09	50	11.2	9.7	06	8.7	03	12.7	12	50	11.2	02	02	02	02					
12.7	10	10.7	70	10.7	07	8.9	59	95	11.2	06	8.7	06	8.6	06	12.7	15	50	11.1	9.6	09	8.6	06	12.6	15	50	11.1	05	09	09	09					
12.6	13	10.6	73	10.6	10	8.8	62	93	11.1	09	8.6	09	8.5	08	12.6	18	50	11.0	9.5	12	8.5	08	12.5	18	50	11.0	08	12	12	12					
12.5	17	10.5	76	10.5	13	8.7	64	93	11.0	12	8.5	12	8.4	11	12.5	21	50	10.9	9.4	14	8.4	11	12.4	21	50	10.9	10	14	14	14					
12.4	20	10.4	79	10.4	16	8.6	67	93	10.9	15	8.4	14	8.3	14	12.4	24	50	10.8	9.3	17	8.3	14	12.3	24	50	10.8	13	17	17	17					
12.3	24	10.3	82	10.3	19	8.5	69	93	10.8	18	8.3	17	8.2	17	12.3	27	50	10.7	9.2	20	8.2	17	12.2	27	50	10.7	16	19	19	19					
12.2	27	10.2	84	10.2	22	8.4	72	93	10.7	21	8.2	20	8.1	20	12.2	30	50	10.6	9.1	23	8.1	20	12.1	29	50	10.6	18	21	21	21					
12.1	30	10.1	87	10.1	25	8.3	74	93	10.6	24	8.2	22	8.0	22	12.1	33	50	10.5	9.0	25	8.0	22	12.0	32	50	10.5	21	24	24	24					
12.0	33	10.0	89	10.0	28	8.2	77	93	10.5	27	8.1	25	7.9	24	12.0	36	50	10.4	8.9	28	7.9	24	11.9	35	50	10.4	24	26	26	26					
11.9	37	9.9	91	9.9	31	8.1	79	93	10.4	30	8.0	28	7.8	24	11.9	39	50	10.3	8.8	31	7.8	24	11.8	38	50	10.3	26	29	29	29					
11.8	40	9.8	92	9.8	34	8.0	81	93	10.3	33	8.0	31	7.7	29	11.8	42	50	10.2	8.7	33	7.7	29	11.7	40	50	10.2	29	31	31	31					
11.7	43	9.7	93	9.7	37	7.9	84	93	10.2	36	7.8	33	7.6	32	11.7	45	50	10.1	8.6	36	7.6	32	11.6	43	50	10.1	31	33	33	33					
11.6	46	9.6	94	9.6	40	7.8	86	93	10.1	38	7.8	36	7.5	34	11.6	48	50	10.0	8.5	38	7.5	34	11.5	46	50	10.0	34	34	34	34					
11.5	49	9.5	94	9.5	43	7.7	88	93	10.0	41	7.7	38	7.4	36	11.5	51	50	9.9	8.4	41	7.4	36	11.4	49	50	9.9	36	36	36	36					
11.4	52	9.4	94	9.4	46	7.6	90	93	9.9	44	7.6	40	7.3	39	11.4	54	50	9.8	8.3	43	7.3	39	11.3	52	50	9.8	39	39	39	39					
11.3	55	9.3	94	9.3	48	7.5	90	93	9.8	47	7.5	43	7.2	41	11.3	57	50	9.7	8.2	45	7.2	41	11.2	55	50	9.7	41	41	41	41					
									9.7	49	8.1	48	7.1	43	11.2	60	50	9.6	8.1	48	7.1	43	11.1	58	50	9.6	43	43	43	43					
									9.5	55	8.0	50	7.0	45	11.1	63	50	9.5	8.0	50	7.0	45	11.0	61	50	9.5	46	46	46	46					
									9.4	57	7.9	53	6.9	48	11.0	66	50	9.4	7.9	53	6.9	48	10.9	64	50	9.4	48	48	48	48					
									9.3	60	7.8	55	6.8	50	10.9	69	50	9.3	7.8	55	6.8	50	10.8	67	50	9.3	50	50	50	50					
									9.2	62	7.7	57	6.7	52	10.8	72	50	9.2	7.7	57	6.7	52	10.7	70	50	9.2	52	52	52	52					
									9.1	65	7.6	60	6.6	54	10.7	75	50	9.1	7.6	60	6.6	54	10.6	73	50	9.1	54	54	54	54					
									9.0	67	7.5	62	6.5	56	10.6	78	50	9.0	7.5	62	6.5	56	10.5	75	50	9.0	56	56	56	56					
									8.9	70	7.4	64	6.4	58	10.5	81	50	8.9	7.4	64	6.4	58	10.4	77	50	8.9	58	58	58	58					
									8.8	72	7.3	66	6.3	60	10.4	83	50	8.8	7.3	66	6.3	60	10.3	79	50	8.8	60	60	60	60					
									8.7	75	7.2	69	6.2	62	10.3	84	50	8.7	7.2	69	6.2	62	10.2	81	50	8.7	62	62	62	62					
									8.6	77	7.1	71	6.1	64	10.2	85	50	8.6	7.1	71	6.1	64	10.1	82	50	8.6	64	64	64	64					
									8.5	80	7.0	73	6.0	66	10.1	86	50	8.5	7.0	73	6.0	66	10.0	83	50	8.5	66	66	66	66					
									6.9	75	6.9	75	5.9	68	10.0	87	50	6.9	6.9	75	5.9	68	9.9	80	50	6.9	68	68	68	68					
									6.8	77	6.8	77	5.8	70	9.9	88	50	6.8	6.8	77	5.8	70	9.8	81	50	6.8	70	70	70	70					
									6.7	79	6.7	79	5.7	71	9.8	89	50	6.7	6.7	79	5.7	71	9.7	82	50	6.7	71	71	71	71					
									6.6	81	6.6	81	5.6	73	9.7	90	50	6.6	6.6	81	5.6	73	9.6	83	50	6.6	73	73	73	73					
									6.5	83	6.5	83	5.5	75	9.6	91	50	6.5	6.5	83	5.5	75	9.5	85	50	6.5	75	75	75	75					
									5.4	77	5.4	77	5.4	77	9.5	92	50	5.4	5.4	77	5.4	77	9.4	86	50	5.4	77	77	77	77					
									5.3	78	5.3	78	5.2	80	9.4	92	50	5.3	5.3	78	5.2	80	9.3	87	50	5.3	78	78	78	78					
									5.1	81	5.1	81	5.1	81	9.3	93	50	5.1	5.1	81	5.1	81	9.2	88	50	5.1	81	81	81	81					
									5.0	83	5.0	83	5.0	83	9.2	93	50	5.0	5.0	83	5.0	83	9.1	89	50	5.0	83	83	83	83					

N. B. For $\sigma_b > 100$, compression reinforcement is not permissible, because in that case σ_e will $> \sigma_e$ permissible.
















STRUCTURAL ANALYSIS

Bending moments, shearing forces and deflection of some loading cases

No. : 3.911

Date : 21st Febr. 77

Sig : *[Signature]*

Method of Loading	Location of Maximum	Bending Moment		Shearing Forces		Maximum Deflection and Slope
		Ben-Def- dina lection imum	Maxi- imum	Diagram	Diagram	
	B	A	$P = WL$			$\frac{WL^3}{3EI}, \frac{WL^2}{2EI}$
	B	A	$P = \frac{WL}{2}$			$\frac{WL^3}{8EI}, \frac{WL^2}{6EI}$
	C	A	$P = \frac{WL}{4}$			$\frac{WL^3}{48EI}, \frac{WL^2}{16EI}$
	C	A	$P = \frac{WL}{8}$			$\frac{5WL^3}{384EI}, \frac{WL^2}{24EI}$
	C	D not max at C	$P = \frac{Wab}{L}$			$\frac{Wa^2b^2}{3EI} = 6C^*$
	at AB&C	C	$P = \frac{WL}{4}$ $Q = \frac{WL}{8}$			$\frac{WL^3}{192EI}$
	A or B C	C	$P = \frac{WL}{8}$ $Q = \frac{WL}{12}$			$\frac{WL^3}{384EI}$


*At D, distant $\sqrt{a(2L-a)} + 3$ from B, $\delta = W(L-a)(2aL-a^2) \sqrt{3EI}$

TRIGONOMETRY

Basic notations

Angular & circular measure

$$\begin{aligned} \alpha &= \text{arc } \alpha = \frac{\pi \cdot \alpha^\circ}{180^\circ} \\ \text{arc } \alpha &\approx 0.017453 \cdot \alpha^\circ \\ \alpha^\circ &\approx 57.2967 \cdot \text{arc } \alpha \end{aligned}$$

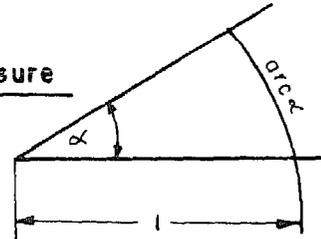

Angular measure	0°	30°	45°	60°	90°	180°	270°	360°
Circular measure	0	$\frac{\pi}{6}$	$\frac{\pi}{4}$	$\frac{\pi}{3}$	$\frac{\pi}{2}$	π	$\frac{3\pi}{2}$	2π
arc α	0	0.52	0.78	1.05	1.57	3.14	4.71	6.28

The length of the arc of a circle which makes an angle α with the centre of the circle with radius r is :

$$b = r \cdot \text{arc } \alpha$$


The right-angled triangle

$$\sin \alpha = \frac{\text{Perpendicular}}{\text{Hypotenus}} = \frac{a}{c}$$

$$\cos \alpha = \frac{\text{Base}}{\text{Hypotenus}} = \frac{b}{c}$$

$$\tan \alpha = \frac{\text{Perpendicular}}{\text{Base}} = \frac{a}{b}$$

$$\cot \alpha = \frac{\text{Base}}{\text{Perpendicular}} = \frac{b}{a}$$

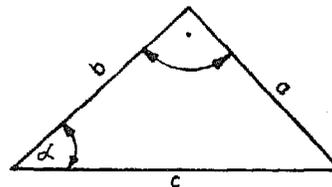

Functional values of the important angles

Angle	0°	30°	45°	60°	75°	90°	180°	270°	360°
Sine	0	0.500	0.707	0.866	0.966	1	0	-1	0
Cosine	1	0.866	0.707	0.500	0.259	0	-1	0	1
tangent	0	0.577	1.000	1.732	3.732	∞	0	∞	0
Cotangent	∞	1.732	1.000	0.577	0.268	0	∞	0	∞

STRUCTURAL ANALYSIS
General Conversion Table

No. 13.913

Date : 20th Febr. 77

Sig : *[Signature]*

GENERAL CONVERSION TABLE

Multiply by	To Convert	To	
2.54	Inches	Centimetres	0.3937
30.48	Feet	„ „	0.3228
0.914	Yards	Metres	1.094
1609.3	Miles	„ „	0.000621
6.45	Square Inches	Sq. cum.	0.155
0.093	Square Feet	Sq. Metres	10.764
0.836	Square Yards	„ „	1.196
16.39	Cubic Inches	Cub. cms	0.061
28.3	Cubic Feet	Litres	0.0353
6.24	„ „	Gallons	0.1602
0.765	Cubic Yards	Cub. Metres	1.308
0.3732	Pounds (Troy)	Kilogrammes	2.68
1016.0	Tons	Kilogrammes	0.000984
4.546	Gallons	Litres	0.22
70.3	Lb. per sq. in.	Gm./sq. cm.	0.0142
1.575	Tons per sq. in.	Kgms./sq. mm.	0.635
4.883	Lb. per sq. ft.	Kgm./sq. metre	0.205
0.593	Lb. per cub. yd.	Kgm./cub. metre	1.686
16.02	Lb. per cub. ft.	„ „ „	0.062
0.1833	Foot lb.	K'grammetres	7.23
0.33	Foot-tons	Tonne - metres	3.0
197.0	Metres sec.	Ft./min.	0.00508
1.488	Lb. per ft.	Kgm. per metre	0.672
0.496	Lb. per yd.	„ „ „	2.016
3 333.33	Tons per ft.	„ „ „	0.0003
1 111.11	Tons per yd.	„ „ „	0.0009
10.936	Tons per sq. ft.	Tonnes/sq. metre	0.0914
1.215	Tons per sq. yd.	„ „	0.823
1.329	Tons per cub. yd.	Tonnes cub. metre	0.752
25.8	Inch tons	K'grammeire	0.0387
	To Obtain	From	Multiply by above

I. A. T. A. Swiss Association for Technical Assistance

STRUCTURAL ANALYSIS

Conversion table inches - mm
feet - mm

No : 3.910

Date : 21st Febr. 77

Sig : *[Signature]*

CONVERSION TABLE

in.	mm	ft.	mm	ft.	mm
1/16	1.59	1	304.8	25	7620.0
1/8	3.18	2	609.6	26	7924.8
3/16	4.76	3	914.4	27	8229.6
1/4	6.35	4	1219.2	28	8534.4
5/16	7.94	5	1524.0	29	8839.2
3/8	9.53	6	1828.8	30	9144.0
7/16	11.11	7	2133.6	31	9448.8
1/2	12.70	8	2438.4	32	9753.6
9/16	14.29	9	2743.2	33	10058.4
5/8	15.88	10	3048.0	34	10363.2
3/4	19.05	11	3352.8	35	10668.0
7/8	22.23	12	3657.6	36	10972.8
1	25.40	13	3962.4	37	11277.6
2	50.80	14	4267.2	38	11582.4
3	76.20	15	4572.0	39	11887.2
4	101.6	16	4876.8	40	12192.0
5	127.0	17	5181.6	41	12496.8
6	152.4	18	5486.4	42	12801.6
7	177.8	19	5791.2	43	13106.4
8	203.2	20	6096.0	44	13411.2
9	228.6	21	6400.8	45	13716.0
10	254.0	22	6705.6	46	14020.8
11	279.4	23	7010.4	47	14325.6
12	304.8	24	7315.2	48	14630.4


S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department


Suspension Bridge Division

MENSURATION — Areas




Square

A = area.
 $A = s^2$
 $A = \frac{1}{2}d^2$
 $s = 0.7071d = \sqrt{A}$
 $d = 1.414s = 1.414\sqrt{A}$




Rectangle

A = area.
 $A = ab$
 $A = a\sqrt{d^2 - b^2} = b\sqrt{d^2 - a^2}$
 $d = \sqrt{a^2 + b^2}$
 $a = \sqrt{d^2 - b^2} = \sqrt{A + b^2}$
 $b = \sqrt{d^2 - a^2} = \sqrt{A + a^2}$




Parallelogram

A = area.
 $A = ab$
 $a = A + b$
 $b = A + a$
 Note that dimension a is measured at right angles to line b.




Right-angled Triangle

A = area.
 $A = \frac{bc}{2}$
 $a = \sqrt{b^2 + c^2}$
 $b = \sqrt{a^2 - c^2}$
 $c = \sqrt{a^2 - b^2}$




Acute-angled Triangle

A = area.
 $A = \frac{bh}{2} = \frac{b}{2} \sqrt{a^2 - \left(\frac{a^2 + b^2 - c^2}{2b}\right)^2}$
 If $S = \frac{1}{2}(a + b + c)$, then
 $A = \sqrt{S(S-a)(S-b)(S-c)}$




Obtuse-angled Triangle

A = area.
 $A = \frac{bh}{2} = \frac{b}{2} \sqrt{a^2 - \left(\frac{c^2 - a^2 - b^2}{2b}\right)^2}$
 If $S = \frac{1}{2}(a + b + c)$, then
 $A = \sqrt{S(S-a)(S-b)(S-c)}$



Trapezoid

A = area.
 $A = \frac{(a+b)h}{2}$




Trapezium

A = area.
 $A = \frac{(H+h)a + bh + cH}{2}$
 A trapezium can also be divided into two triangles as indicated by the dotted line. The area of each of these triangles is computed and the results added to find the area of the trapezium.




Regular hexagon

A = area.
 $R = \text{radius of circumscribed circle}$
 $r = \text{radius of inscribed circle}$
 $A = 2.598s^2 = 2.598R^2 = 3.464r^2$
 $R = s = 1.155r$
 $r = 0.866s = 0.866R$
 $s = R = 1.155r$




Circle

A = area, C = circumference
 $A = \pi r^2 = 3.1416r^2 = 0.7854d^2$
 $C = 2\pi r = 6.2832r = 3.1416d$
 $r = C + 6.2832 = \sqrt{A + 3.1416} = 0.564\sqrt{A}$
 $d = C + 3.1416 = \sqrt{A + 0.7854} = 1.128\sqrt{A}$
 Length of arc for center angle of $1^\circ = 0.008727d$
 Length of arc for center angle of $n^\circ = 0.008727nd$



Circular sector

A = area, l = length of arc, α = angle in deg.
 $l = \frac{r\alpha \times 3.1416}{180} = 0.01745r\alpha = \frac{2A}{r}$
 $A = \frac{1}{2}rl = 0.008727r^2\alpha$
 $\alpha = \frac{57.296l}{r} \quad r = \frac{2A}{\alpha} = \frac{57.296l}{\alpha}$




Circular Segment

A = area, l = length of arc, α = angle in deg.
 $c = 2\sqrt{h(2r-h)} \quad A = \frac{1}{2}r^2(\alpha - \sin\alpha)$
 $r = \frac{c + 4h}{8h} \quad l = 0.01745r\alpha$
 $h = r - \frac{1}{2}\sqrt{4r^2 - c^2} \quad \alpha = \frac{57.296l}{r}$



Circular Ring


A = area.
 $A = \pi(R^2 - r^2) = 3.1416(R^2 - r^2)$
 $= 3.1416 \cdot 1416(R+r)(R-r)$
 $= 0.7854(D^2 - d^2) = 0.7854(D+d)(D-d)$



Circular Ring Sector


A = area, α = angle in degrees.
 $A = \frac{\alpha\pi}{360}(R^2 - r^2) = 0.00873\alpha(R^2 - r^2)$
 $= \frac{\alpha\pi}{4 \times 360}(D^2 - d^2) = 0.00218\alpha(D^2 - d^2)$

MENSURATION — Volumes of Solids




Square Prism

V = volume.
 $V = abc$
 $a = \frac{V}{bc} \quad b = \frac{V}{ac} \quad c = \frac{V}{ab}$




Cube

V = volume.
 $V = s^3$
 $s = \sqrt[3]{V}$



Wedge

V = volume.
 $V = \frac{(2a + c)bh}{6}$



Cylinder

V = volume, S = area of cyl. surface.
 $V = 3.1416r^2h = 0.7854d^2h$
 $S = 6.2832rn = 3.1416dh$
 Total area A of cylindrical surface and end surfaces:
 $A = 6.2832r(r+h) = 3.1416d(\frac{1}{2}d + h)$

S. A. T. A. Swiss Association for Technical Assistance

Volumes of Solids Continued.




Portion of Cylinder $V = 1.5708r^2(h_1 + h_2) = 0.3927d^2(h_1 + h_2)$
 $S = 3.1416r(h_1 + h_2) = 1.5708d(h_1 + h_2)$

V = volume; S = area of cylindrical surface.



Sphere

V = volume, A = area of surface.
 $V = \frac{4\pi r^3}{3} = \frac{\pi d^3}{6} = 4.1888r^3 = 0.5236d^3$
 $A = 4\pi r^2 = \pi d^2 = 12.5664r^2 = 1.416d^2$
 $r = \sqrt[3]{\frac{3V}{4}} = 0.6204\sqrt[3]{V}$



Portion of Cylinder

V = volume; S = area of cylindrical surface.


$V = \left(\frac{2}{3}a^3 \pm b \times \text{area ABC}\right) \frac{h}{r \pm b}$
 $S = (ad \pm b \times \text{length of arc ABC}) \frac{h}{r \pm b}$

Use + when base area is larger, and - when base area is less than one-half the base circle.



Spherical Sector


V = volume; A = total area of conical and spherical surface.
 $V = \frac{2\pi r^2 h}{3} = 2.0944r^2 h$
 $A = 3.1416r(2h + \frac{1}{2}c)$
 $c = 2\sqrt{h(2r-h)}$



Hollow Cylinder


V = volume.

$V = 3.1416h(R^2 - r^2) = 0.7854h(D^2 - d^2)$
 $= 3.1416h \frac{D^2 - d^2}{4} = 3.1416ht(D - d)$
 $= 3.1416ht(2r + r) = 3.1416ht(D + d)$
 $= 3.1416ht(R + r) = 1.5708ht(D + d)$



Spherical Segment

V = volume; A = area of spherical surface.
 $V = 3.1416h^2\left(r - \frac{h}{3}\right) = 3.1416h\left(\frac{c^2}{8} + \frac{h^2}{6}\right)$
 $A = 2\pi rh = 6.2832rh = 3.1416\left(\frac{c^2}{4} + h^2\right)$
 $c = 2\sqrt{h(2r-h)}; r = \frac{c^2 + 4h^2}{8h}$




Cone

V = volume; A = area of conical surface.


$V = \frac{3.1416r^2 h}{3} = 1.0472r^2 h = 0.2618d^2 h$
 $A = 3.1416r\sqrt{r^2 + h^2} = 3.1416rs = 1.5708ds$

$s = \sqrt{r^2 + h^2} = \sqrt{\frac{d^2}{4} + h^2}$



Spherical Zone

V = volume; A = area of spherical surface.
 $V = 0.5236h\left(\frac{3c_1^2}{4} + \frac{3c_2^2}{4} + h^2\right)$
 $A = 2\pi rh = 6.2832rh$
 $r = \sqrt{\frac{c_2^2}{4} + \left(\frac{c_2^2 - c_1^2 - 4h^2}{8h}\right)^2}$



Frustum of Cone

V = volume; A = area of conical surface.

$V = 1.0472h(R^2 + Rr + r^2) = 0.2618h(D^2 + Dd + d^2)$
 $A = 3.1416s(R + r) = 1.5708s(D + d)$
 $a = R - r \quad s = \sqrt{a^2 + h^2} = \sqrt{(R - r)^2 + h^2}$



Spherical Wedge

V = volume; A = area of spherical surface.
 $\alpha = \text{center angle in degrees}$
 $V = \frac{\alpha}{360} \times \frac{4\pi r^3}{3} = 0.0116\alpha r^3$
 $A = \frac{\alpha}{360} \times 4\pi r^2 = 0.0349\alpha r^2$



Hollow Sphere

V = volume.
 $V = \frac{4\pi}{3}(R^3 - r^3) = 4.1888(R^3 - r^3)$
 $= \frac{\pi}{6}(D^3 - d^3) = 0.5236(D^3 - d^3)$

STRUCTURAL ANALYSIS


Colour indication of temperature of steel

No. : 3.917

Date : 21st Febr. 77

Sig : *[Signature]*


COLOUR INDICATION OF TEMPERATURE OF STEEL

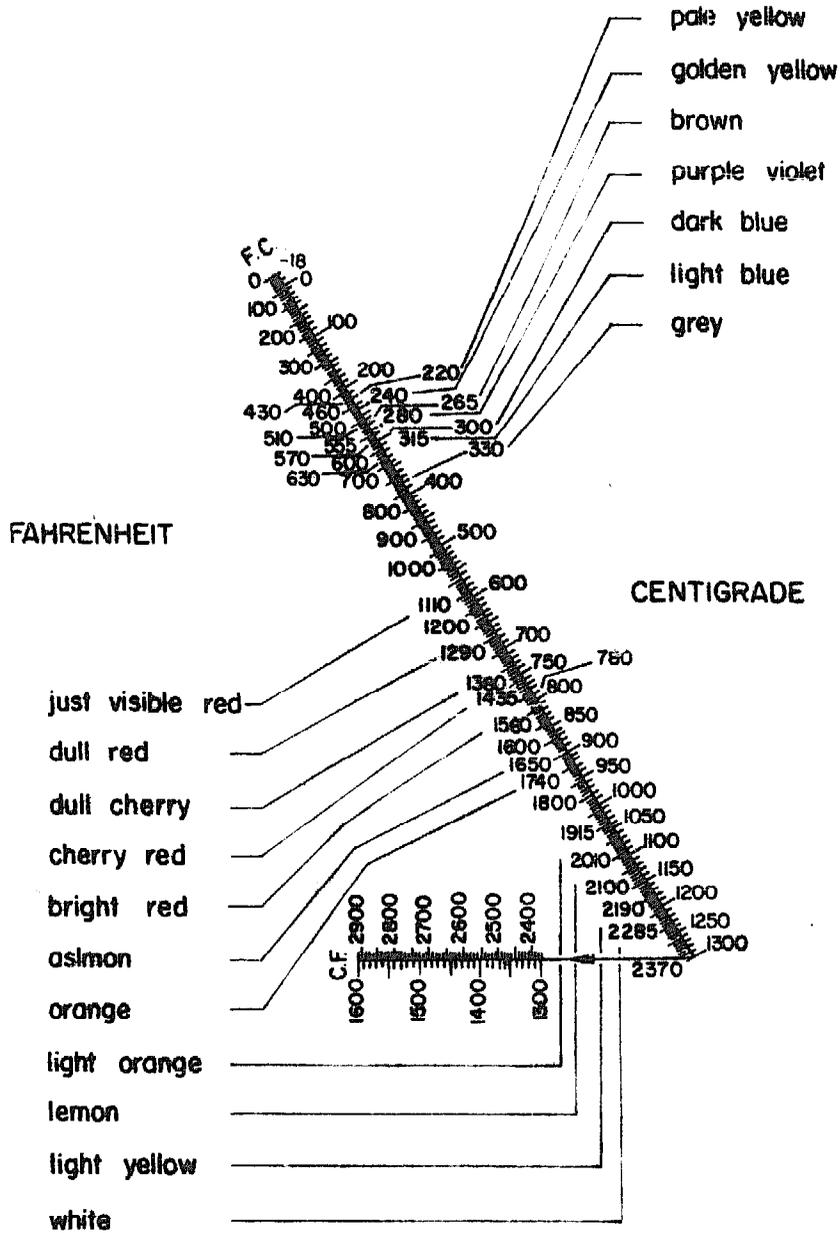

S A T A , Swiss Association for Technical Assistance

1st. Possibility

Under the assumption that the influence of transmission through the bond stress of the anchor neglected — due to the uncertainty about the composition of fill concrete — the calculation will be carried out in the following manner: In this case the cross girder will be usually stronger dimensioned than in the second possible calculation which is shown below:

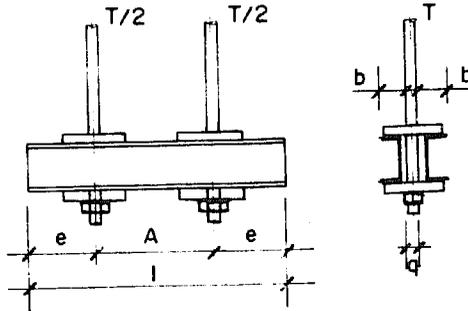

1) $\sigma = \frac{T}{2 \cdot b \cdot l} \leq \sigma$ permissible (concrete)

2) If $e > 0.207 l$ the max. Bending moment is:

$M_{max} = \frac{T \cdot e^2}{2 \cdot l}$

3) If $e < 0.207 l$ the max. Bending moment is:


$M = \frac{T}{2} \left(\frac{l}{4} - e \right)$

4) Section of Modulus

$W = \frac{M_{max}}{2 \cdot \sigma_{all}}$ (cm³)

2nd Possibility

In case the external dimensions require the greater expansion of the different Anchor rods, the calculation should be carried out in the following way:

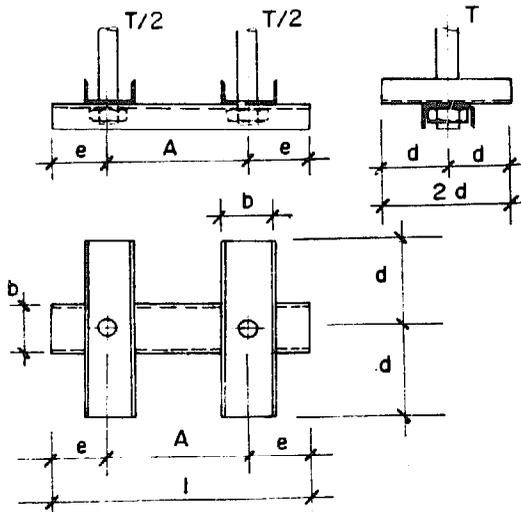


1) $\sigma = \frac{T}{2b [(2d-b) + 2e]} \leq \sigma$ permissible (concrete)

2) If $e = d$ $\sigma = \frac{T}{8eb + 2b^2}$

3) If $e = d$ $M_{max} = \frac{T}{4 \cdot e}$

4) Section of modulus = $\frac{M_{max}}{\sigma_{all}}$ (cm³)

HOOKS:



TECHNICAL DATA

d	w	l	permissible tons
mm	mm	mm	
20	65	25	5.03
25	80	30	7.80
32	100	36	12.87
38	125	49	18.10

$W_{max} = 3.4 d$
 $l_{perm.} = \frac{2 \cdot d^2 \cdot \pi \cdot \sigma}{4}$
 $\sigma_{perm.} = 8 \text{ kg/mm}^2$
 d in mm
 σ in kg/mm²




4. SURVEY OF BRIDGE SITES

4.100 Site Selection and Technical Report

1. Site Selection

The location of a bridge site is usually determined by economic, technical and political reasons and arguments. On the economic and technical point the main thought to consider is that there are two different types of bridges. One is the SUSPENDED BRIDGE and the other is the SUSPENSION BRIDGE. The cost of the Suspended Bridge is much less than that of the Suspension Bridge, even when the span is bigger. A general comparison of the costs is shown on the graphic below.

BRIDGE COSTS

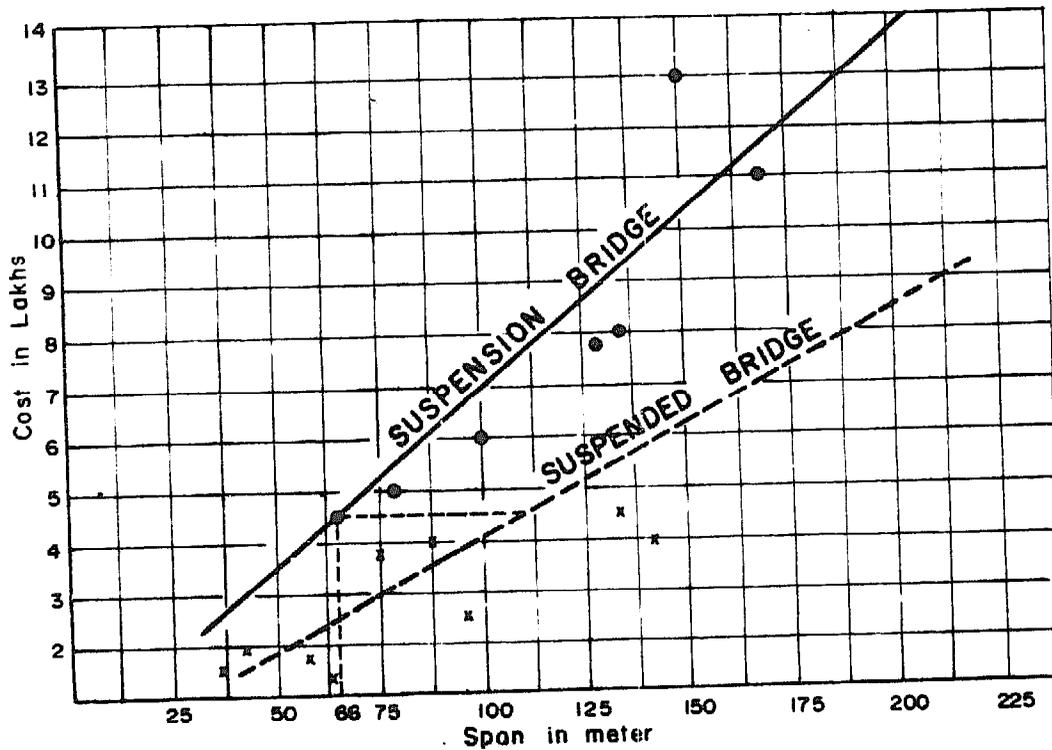

e.g. Suspension Bridge of 66 m span

For the price of this Suspension Bridge you can build
a Suspended Bridge with a span of 102 m

SATA, Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITE

No. : 4.102

Site Selection and Technical Report

Date : 28.12.1976

Sig : *Landman*

Also the conditions for the foundation should be considered very carefully. Do not select sites where big rock excavations will be necessary. Do not put foundations in slopes where land slides may occur. Big protection walls, Gabion walls and so on increase the costs of a bridge rapidly. A little bigger span more up- or downstream might still be cheaper. If it is not possible to find the best site in consideration of all these points, you can make two or three surveys in different places, so that an exact comparison can be made at the office.

2. Technical Report

The technical report should include the following points:

a) Location of proposed bridge site

Place:

River:

Trail:

Panchayat:

District:

Zone:

One inch map:

Co-ordinates:

Altitude:

Is there private or public land on the riverbank?

b) Existing crossing facilities

Is there a ferry, a temporary bridge?

Is it also possible to cross with animals?

How many months a year is it possible to cross the river?

c) Trails served and area of influence

Is there a main trail? From - to?

d) Traffic and economic background

How many people are crossing the river? What kind of goods are they carrying mainly? Is it possible that there would be more traffic after the construction of a bridge?

SURVEY OF BRIDGE SITE

Site selection and Technical Report

No. : 4.109

Date : 28.12.1976

Sig : *Anderson*

e) Potential benefits from the construction of the bridge

e.g. no ferry charge, shorter way from - to

f) Description of proposed bridge

1. Design characteristics

Type of bridge

Span

Main cables

walkway cables

Main anchorage types: left bank / right bank

Height of towers

Free board over high flood level

State why you selected this type of bridge

2. Foundation conditions

Left bank, right bank

Are there fields, rocks or big stones around? How steep is the slope? Are there trees or bushes on the site? May land slides occur?

(How to make soil investigations, see chapter 'Soil Investigation'.)

3. Hydrology

width of the river

width of the river during high flood

river bed gradient at centre line of the bridge

Is the river calm or not?

Is the riverbed flat or sloping?

4. Approach trails

Is it necessary to build approach trails? Is blasting required for that? How long will this trail be?

5. Local materials

Are the following materials available at the site? Where do they have to be carried from (distances)?:

Stones

Rubble

Gravel

Sand

Wood

Sal wood

salla wood

Bamboo

SURVEY OF BRIDGE SITE

Site Selection and Technical Report

No : 4.104

Date : 28.12.1976

Sig : *London*

6. Miscellaneous

General remarks about the site and about existing houses, walls, protection walls, etc.

g) Cost of the proposed bridge

n) Fotos of the bridge site

In the fotos the main survey points should be shown. The fotos should also show the foundation conditions.

i) Transport routes and access to the bridge site

1. Transport routes

Nearest roadhead served by trucks

Is it possible that a road to a nearer point will be finished soon?

Transport distance by porters in miles and days

Porter charge, availability of porters and

Favorable months for the transportation

2. Access to the bridge site

Nearest air field (regular flights or not)

Nearest bus or railway station

Walking distance in miles and days

Distance to the nearest wireless station

Distance to the nearest post office

Other possibilities of communication

SURVEY OF BRIDGE SITES

No.: 4.201


Site Survey, after the Site Selection (I)

Date: 6. 8.1975

Sig.: *H. Elmer*

- Material required: - Theodolite with tripod and levelling-staff
 - Measuring tape 20 to 30 meters long
 - Carpenter - level (spirit level)
 - Steel - tape, 2 to 3 meters long
 - Steel - pegs, Paint

Sketch

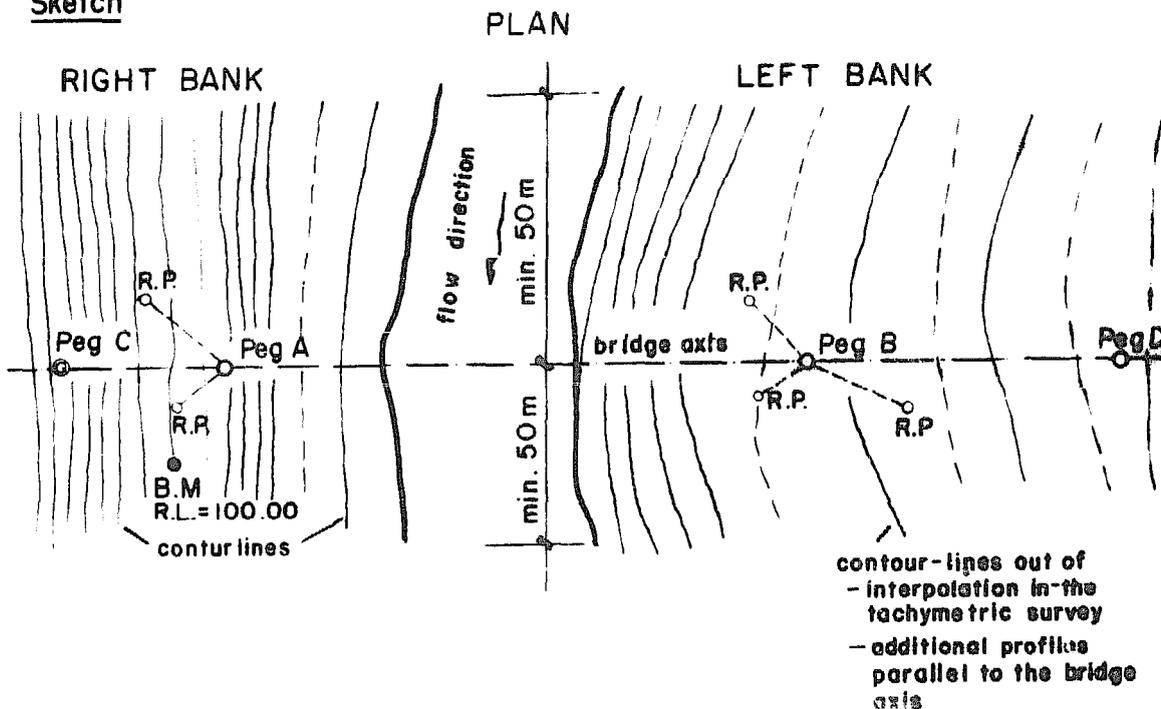

Description:

1. Determine the future bridge center-line with the aid of two pegs, one on each bank (points "A" and "B"). The pegs should be 40 cm to 50 cm long and driven at least 2/3 of their length into the ground. They must be of good wood or steel and marked with paint.
2. Measure some reference points (R.P.) for these two pegs. Make a sketch with the location of the reference points.
3. Establish a bench mark as point of origin for the elevations (R.L. 100.00 m). This can be the top of a big stone or one of the pegs "A" or "B".
4. Set up two additional pegs "C" and "D" in the center-line, at least 30 meters behind "A" or "B" if the ground is flat or at least 20 meters higher than "A" or "B" if the ground is sloped.

S.A.T.A. - Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITES

No.: 4.202


Site Survey, after the Site Selection (II)

Date: 6. 8.1975

Sig.: *D. E. S. S.*

Sketch

PROFILE

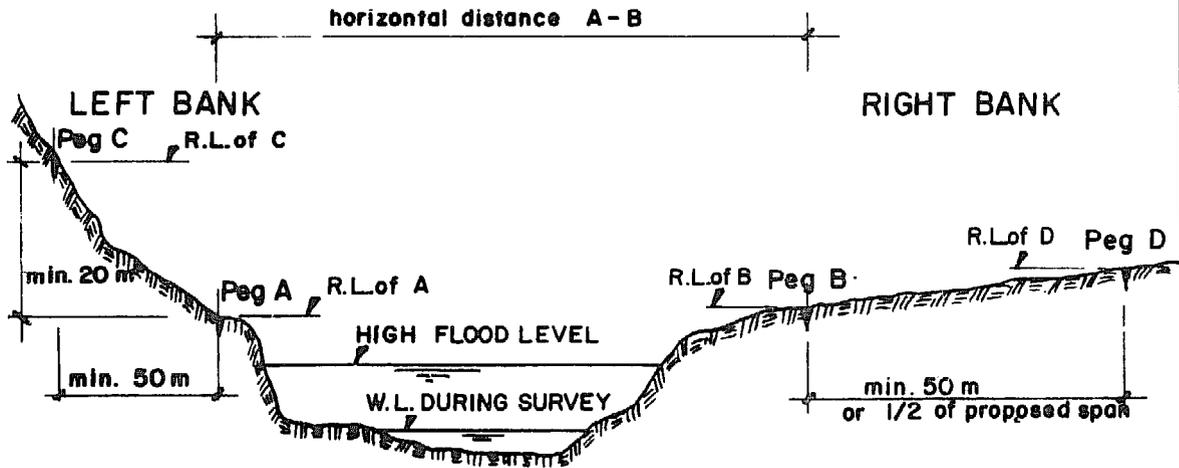

5. With theodolite and staff, determine the distances and differences in elevation between the pegs "A", "B", "C", "D" (see 4.300).

Two independent measurements of the distance "A-B" must be made (see 4.303).

6. Obtain the size and form of the area around the proposed bridge site using either a tacheometric survey (described in 4.300) or the parallel profile method (described in 4.203).

The survey should extend **min 50 m upstream and downstream**.

7. Make the profile measurements either by the "step-method" (see 4.306) or by the tacheometric method (see 4.300).

- If the ground is flat the profile should extend at least **50 meters** behind the probable tower place.
- If the ground is steep the profile should extend at least **20 meters** higher than the probable tower place.

For long spans (more than 120 meters) the profile should extend further than **50 meters**.

8. Make notes on:- Soil conditions for the construction.

- Availability of construction materials.
- Transport route for bridge-parts and cement; rates.
- Living conditions (food, housing) for the bridge staff.
- River-crossing during the construction-period.
- Availability of labourers and their rates.
- Slides at the bridge place, upstream from the bridge site and of the highest flood-level of the past. (e.g. Sun Kosi 2011, Gandaki 2018).

S A T A , Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITES


No.: 4.203

Site Survey, After Site Selection (III)

Date: 22. 8.1975

Sig.: *W. S. Shrestha*

Sketch for the survey of the bridge-area with parallel profiles.

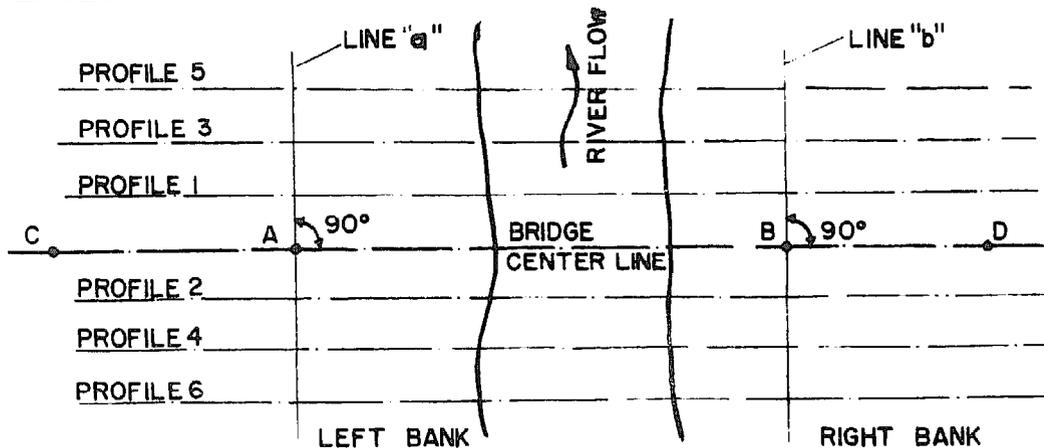


Description:

1. On a perpendicular line to the bridge center-line, set from peg "A" additional pegs at intervals of 5.00 m both upstream and downstream (line "a").
2. Do the same on the other side, starting from peg "B" (along line "b").
3. From the so determined pegs measure the profiles (profile 1,2...) either by the tacheometric method (4.300) or the "step-method" (4.306).

Information about Rock

If the construction-site has on one or on both sides rock, make a sketch in which you show the rock formation. (direction of the layers, strike of the rock/layers).


Example:

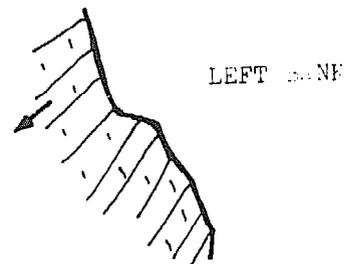

Note down the nature of the rock.

or:

- e.g. - loose rock, soft rock, can be broken with hammer and crow-bar.
- rock with clearly developed layers, blasting partly required.
 - hard homogenous rock, no layers visible, must be blasted.

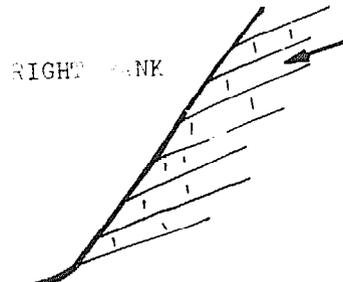

SURVEY OF BRIDGE SITES

No.: 4.204

Survey methods, Tacheometric survey


Date: 17. 7.1975

Sig.: *D. Shrestha*

Material required: Theodolite with tripod and levelling-staff

Summary: With the aid of the theodolite and the staff, horizontal distances and differences in elevation between the theodolite-station and the staff-points are determined, independent of the unevenness of the ground between the points.

Sketch in plan:

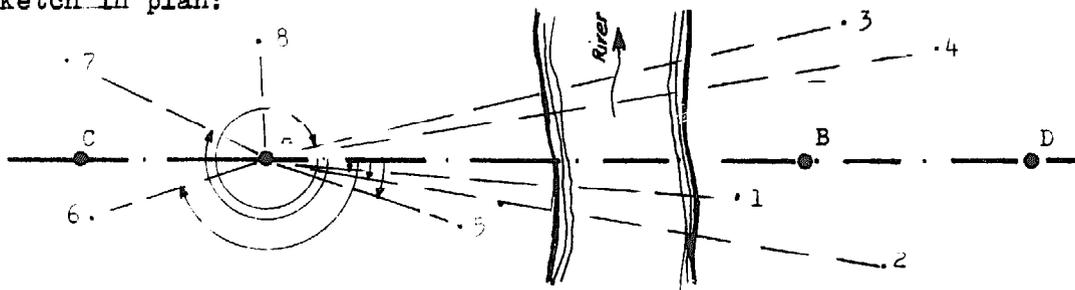

Description:

1. Set the theodolite on point A, measure the height of instrument.
2. Bring the 0° -reading of the horizontal-circle in coincidence with the bridge axis (Direct the telescope towards point B with the horizontal-circle clamped in 0° -position).
3. After proper alignment take for every staff-point the readings of the horizontal circle, the vertical circle, the top hair, the middle hair, the bottom hair and note it down.
4. The staff should be placed at well-defined points in order to describe the shape of the ground as accurately as possible.
e.g. changes in the gradient, in the slope, other breaks in the ground; details such as houses, big stones, trees, foot-trail, rock, river-bank, high-flood level, pegs B,C,D, B.M. etc.
5. Using the tables "TACA" calculate the horizontal and vertical distances according to 4.301 and 4.302. (Ordinary tables for the trigonometrical values can also be used.)

- Note:**
- The staff must be kept in a vertical position. A slight inclination from the vertical will result in a large error in the calculated distances!
 - The accuracy obtained by this method is about 0.3% of the distance. The range can be up to 200 to 250 meters.
 - In the calculations the horizontal distances are rounded off to ± 0.10 m and the differences in elevations to ± 0.05 m.

SURVEY OF BRIDGE SITES


No.: 4.204A

Survey methods, Tacheometric survey
Readings and calculation

Date: 15. 7.1975

Sig.: P. Evans

STATION	STAFF STATION	HORIZ. CIRCLE	VERTICAL CIRCLE	TOP HAIR	MIDDLE HAIR	BOT. HAIR	STAFF INTERC.	HORIZ. DIST.	VERT. DIST.	DIFF. IN ELEV.	RED. LEVEL
HT. OF INSTR. I		o/8	o/8	L1	Z	L2	L	D	V	ΔH	H
ft/m		'/8	'/8	ft/m	ft/m	ft/m	ft/m	ft/m	ft/m	ft/m	ft/m
Station	1	172 50.4	84 45.6	1410	1289	1012	0323	3200	295	315	10315
Sta A	2										
(R.L. = 100.00)	3										
(I = 1.46m)	..										

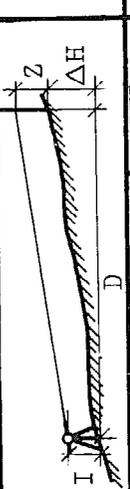


$\Delta H = V + I - Z$
 $H = H_{\text{Stn.}} + \Delta H$

$D = 100 \cdot L \cdot \cos^2 \alpha$ ($L = L1 - L2$)
 $V = 100 \cdot L \cdot \sin \alpha \cos \alpha = 50 \cdot L \cdot \sin 2\alpha$
or $V = D \cdot \tan \alpha$

From the tables "TACA":

$100 \times \sin^2 84^\circ 45.6' = 100 \times \cos^2 5^\circ 14.4' = 99.2$
 $100 \times \sin \alpha \cos \alpha = 50 \times \sin 2(5^\circ 14.4') = + 9.09$

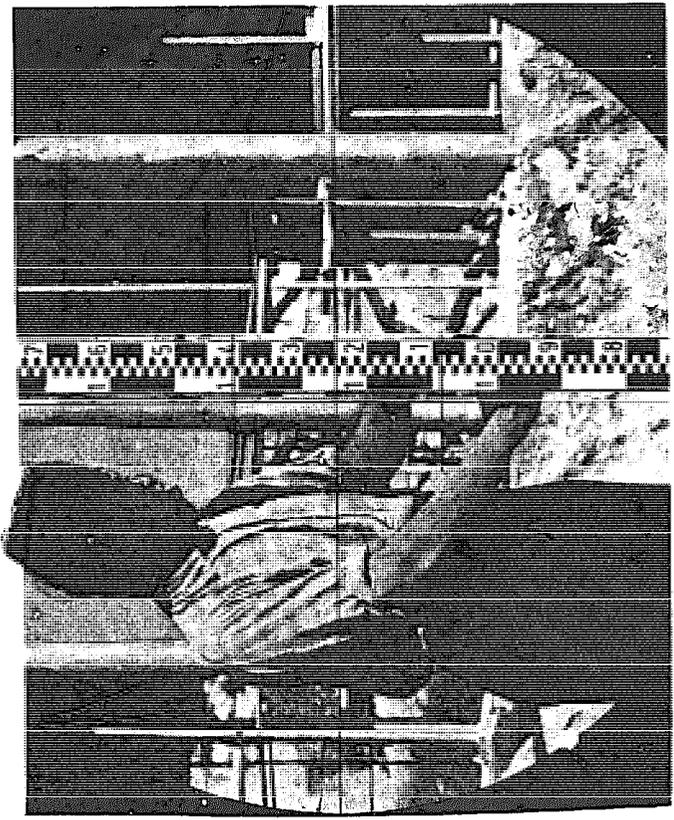


Example:

- Horiz. circle = 172° 50.4
- Vert. circle = 84° 45.6
- Top Hair = 1.410m
- Middle Hair = 1.249m
- B. Hair = 1.087m
- (I = 1.46 m)

Remark:

As that theodolite has 0° in the zenith the vertical circle reading of 84° 45.6 gives an angle α of + 5° 14.4

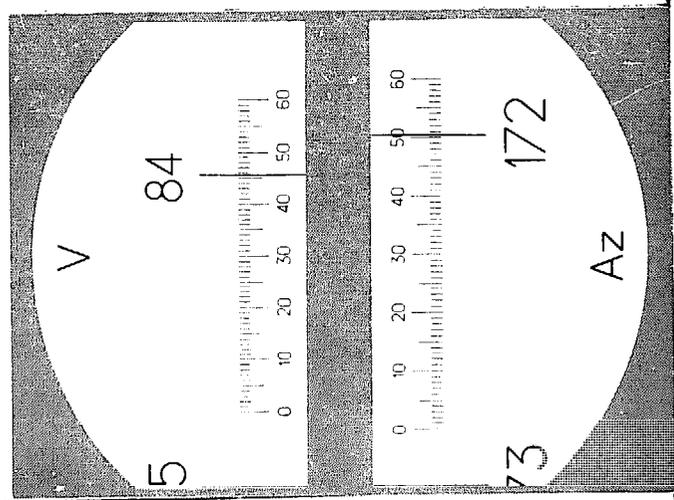


SURVEY OF BRIDGE SITE

Fotos of surveyed Bridge sites
(525 Pikuwa Khola)


No : 4.205

Date : 28.2.77


Sig : Pandey

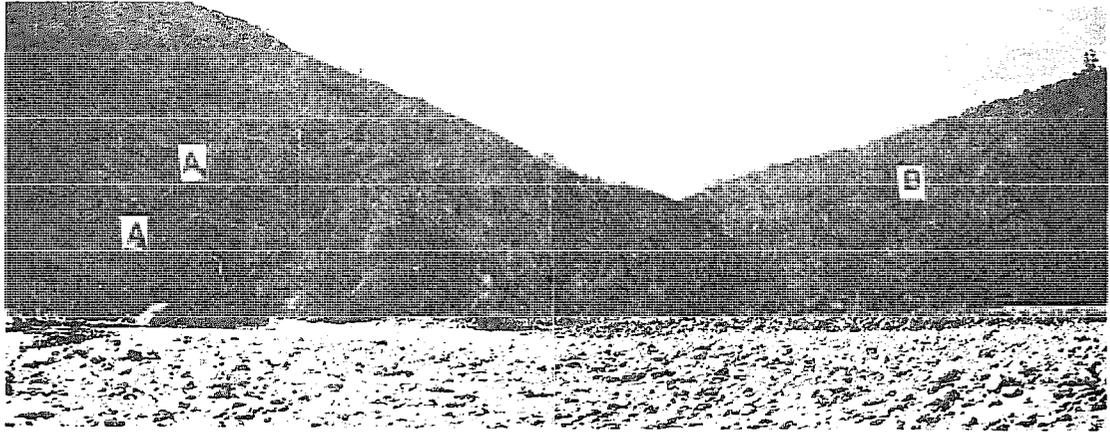

- Site view from downstream

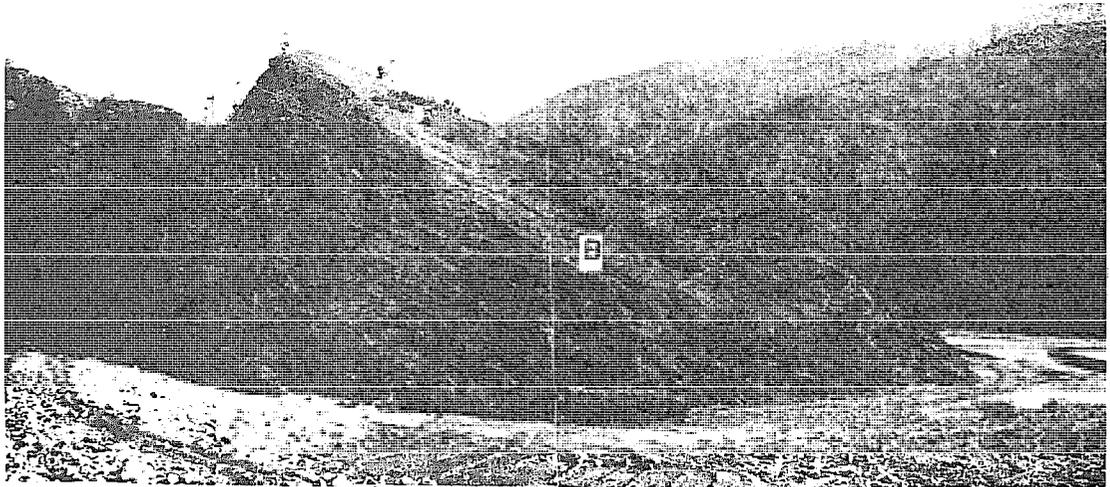

Left bank

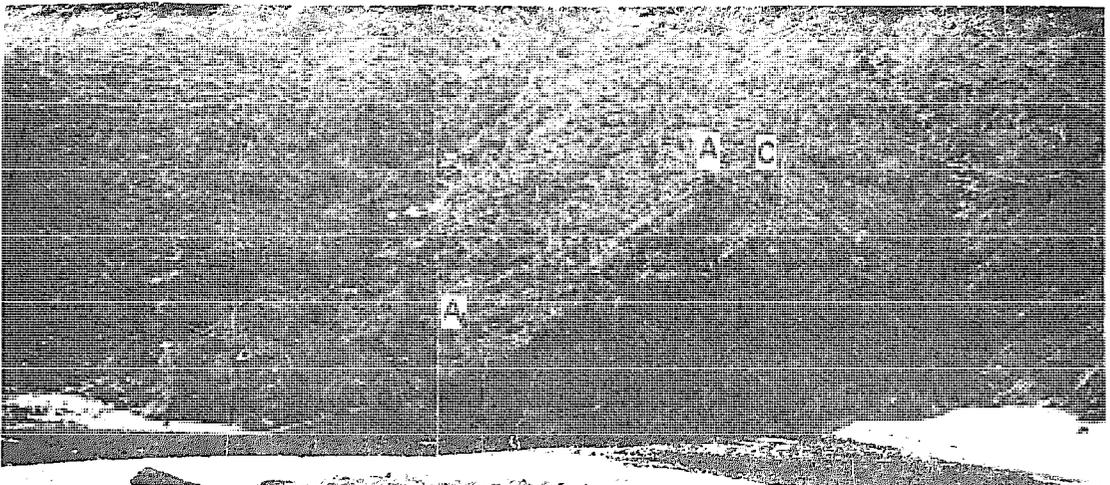

Right bank

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

SURVEY OF BRIDGE SITE	No : 4.206
Tachimetric Survey with K1-RA	Date : 28.12.1976
	Sig : <i>land on top</i>


This survey can be done in the same way as shown on page 4.204. There are only some differences in the reading and calculations. With this instrument you will get directly the horizontal distance. No more calculation for that is necessary. You can also get directly the difference in elevation ΔH . This difference you can also get by the calculation $\Delta H = D \cdot \text{tang}$. When the slope of the line of sight is small, this method yields better results than direct reading on the rod.

TACHYMETRIC SURVEY	with KERN K 1-RA	BRIDGE NR.
JOB: _____	DATE: _____	
INSTR. MAN: _____	NOTE-KEEPER: _____	

STATION TARGET	HORIZ. CIRCLE	VERTIC CIRCLE	HORIZ DIST.	HEIGHT:	DIPP.	ELE- VATION	REMARKS
				INSTR. I SIGHTED	IN ELEV.		
		$g c + \text{tang}$	D m	Z m	ΔH + m	m	
<i>PE6</i>				<i>1.50</i>		<i>10000</i>	
<i>1</i>	<i>170.653</i>	<i>+0.2047</i>	<i>15.60</i>	<i>1.50</i>	<i>+ 3.19</i>	<i>10.319</i>	<i>Bridge Axis</i>

DIFFERENCE IN ELEVATION:

Selector ring on ΔH : $I = Z$: $\Delta H = \text{Reading}$
 $I \neq Z$: $\Delta H = \text{Reading} + I - Z$
 With vertic. angle : $\Delta H = D \cdot \text{tang} + I - Z$

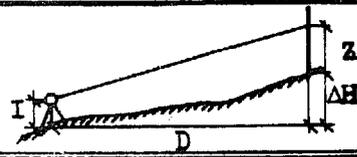


HMG NEPAL, ROADS DEPARTMENT SUSPENSION BRIDGE DIVISION

SAT A. Swiss Association for Technical Assistance

e.g. Horizontal circle	170.6530
Vertical circle (tang)	+0.2047
Distance (direct reading)	15.60 m
Difference in elevation	$0.2047 \times 15.60 = 3.19$ m or direct reading

Sketch to explain the calculation of horizontal distance and difference in level out of inclined tacheometrical measurements.
(For easier calculation use the tacheometrical tables "TACA")

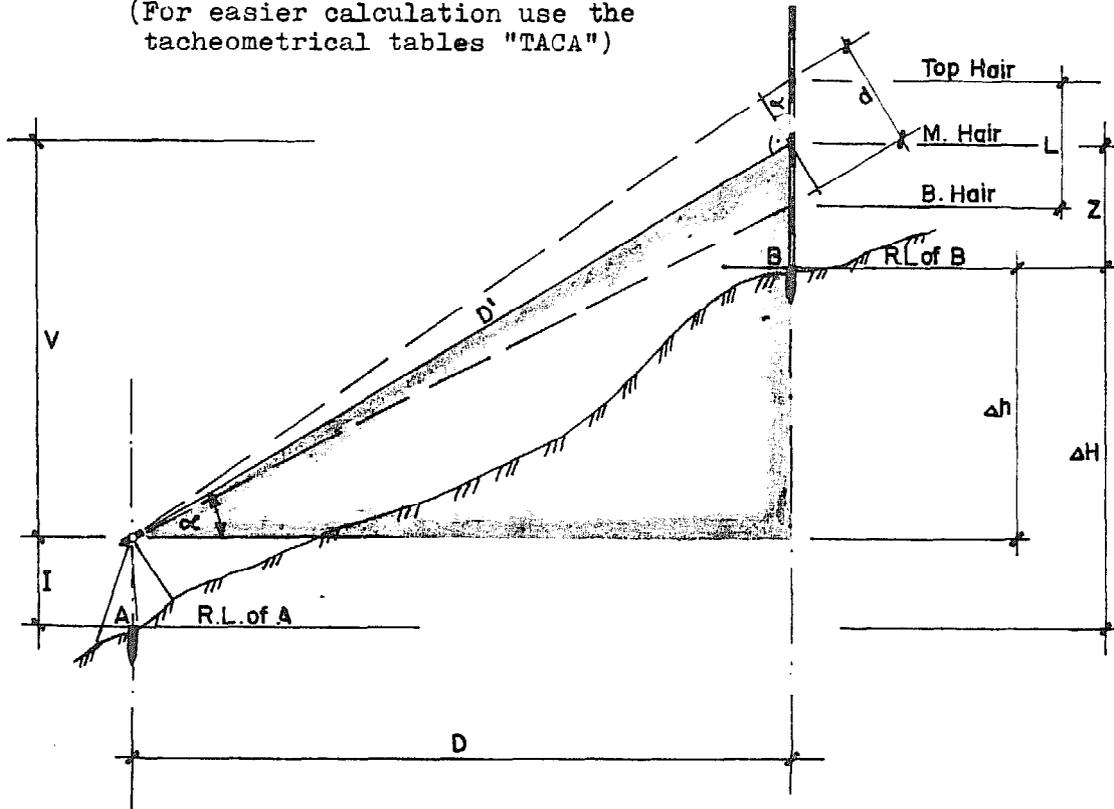

Instrument station A

Staff station B

Readings: L_1 = Top Hair
 Z = Middle Hair
 L_2 = Bottom Hair

α = Vertical angle
 I = Height of instrument

Calculation: $L = L_1 - L_2$

$d = L \times \cos \alpha$
 $D' = 100 \times d = 100 \times L \times \cos \alpha$
 $D = D' \times \cos \alpha = 100 \times L \times \cos^2 \alpha$

$V = D \times \sin \alpha = \frac{100 \times L \times \sin \alpha \times \cos \alpha}{D}$
 or $\frac{V}{D} = \tan \alpha$, $V = D \times \tan \alpha$

$\Delta h = V - Z$

$\Delta H = \Delta h + I = V + I - Z$


R.L. of B = R.L. of A + ΔH

After the distance-measurement by the tachymetric method (see 4.3.1) across the river, a second independent measurement must be made.

a) Dividing of the total distance into two parts

If the river-bed is partly free of water the distance AB can be divided by the help of an additional peg X into two parts. The distances A to X and X to B can then be measured by the tachymetric method and their sum will give the total distance.

Sketch:

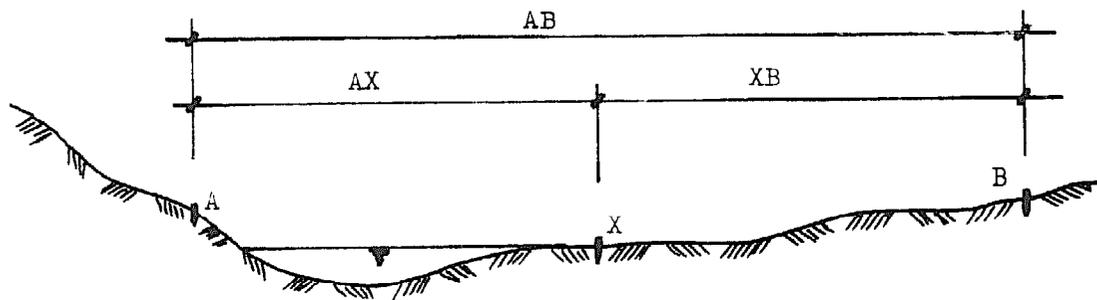

$$AB = AX + XB$$


b) Triangulation Method

Pegging out of a baseline e perpendicular to the bridge center-line in A or B. The length of e should be at least 10% of the distance A to B. Measurement of the distance e by tape.

Measurement of the opposite angle ϵ . ϵ and e must be measured as accurate as possible.


Calculation of the Distance AtoB by the formula $AB = e \times \cot \epsilon = \frac{e}{\tan \epsilon}$

Sketch in plan:

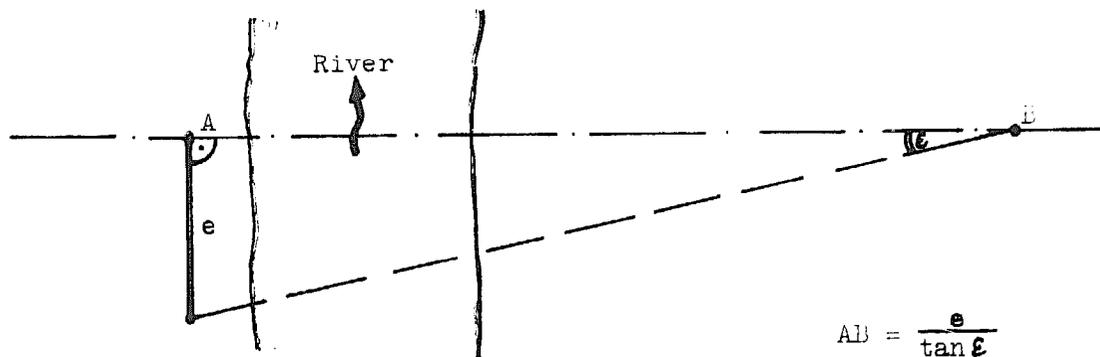

$$AB = \frac{e}{\tan \epsilon}$$

Other possible arrangements for the triangulation method to obtain higher accuracy:

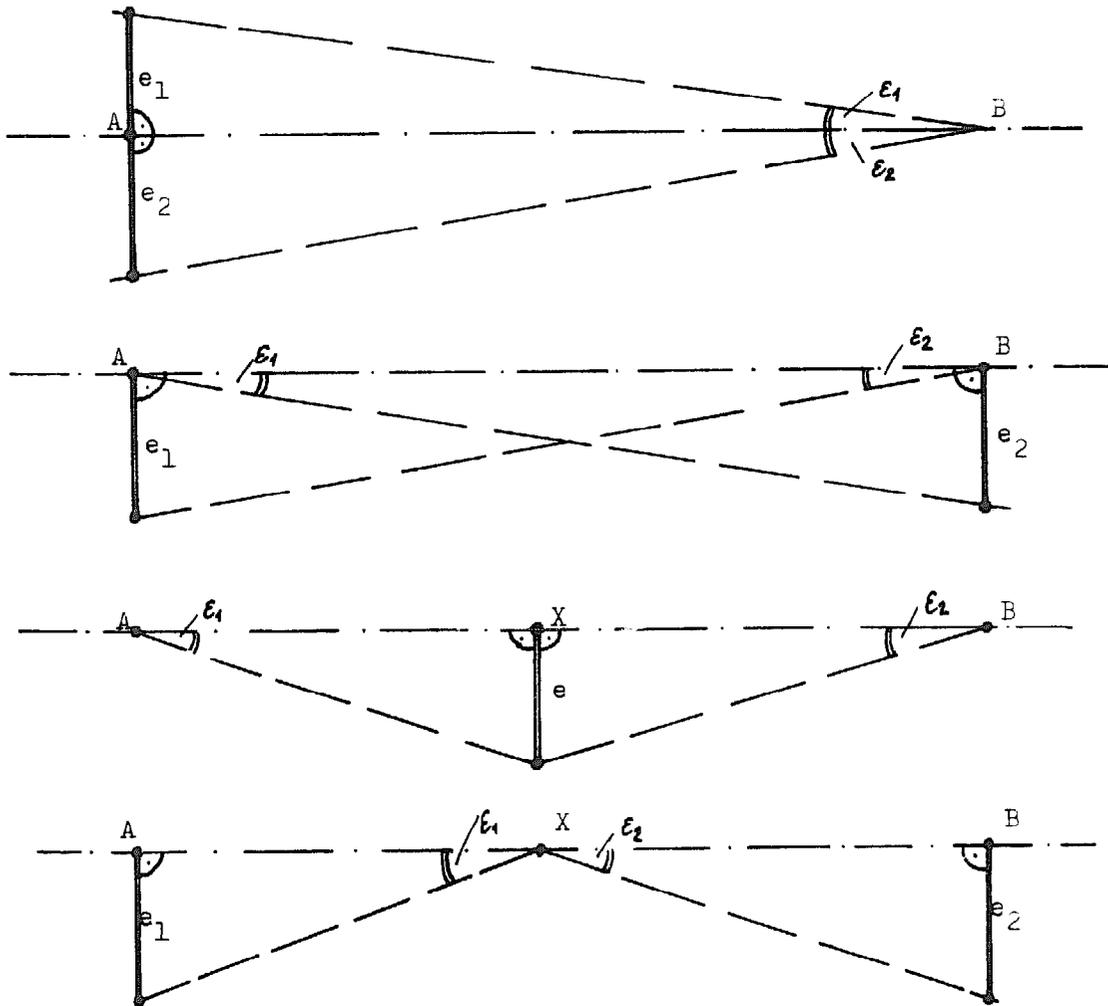

c) Measurement by Rope or Tape

The distance from A to B can also be checked by measuring directly with a tape in several steps or with a rope (rope-length afterwards measured by the tape).

These methods are often not very accurate because the river-banks may be steep and therefore not favorable for a good measurement of horizontal distances. They should only be used for a rough check of the distance.

SURVEY OF BRIDGE SITES

No.: 4.210

Survey methods, Levelling of Bench Marks

Date: 24. 7.1975

Sig.: *D. S. Kumar*

In order to facilitate control of the construction process Bench Marks (B.M.), indicating elevations, should be set up on both banks.

There should be a Bench Mark for every main anchorage as well as for the tower foundations (abutments) and the wind-guy-anchorages.


The tops of solid stones or strong pegs may be chosen as Bench Marks. They must be marked clearly with paint and a sketch of their location (reference distances) should be prepared.

One Bench Mark is fixed as point of origin with R.L. 100.00 m and then all the others are levelled by the "rise and fall method".

Remarks concerning levelling across a river:

To eliminate errors of the instrument as far as possible the following procedure should be applied.

Sketch:

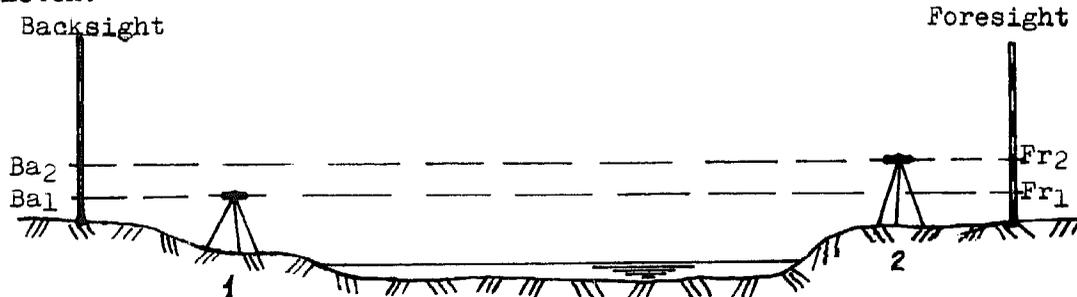

- Mark the two staff points "Back" and "Front".
- Set the instrument on the left bank (position 1) and take the readings Back (Ba 1) and Front (Fr 1).
- Set the instrument on the right bank and take again the readings Back (Ba 2) and Front (Fr 2).
- Calculate the difference of level (Backsight-reading minus Foresight-reading) for:

instrument-position 1	$\Delta L_1 = Ba\ 1 - Fr\ 1$
and instrument-position 2	$\Delta L_2 = Ba\ 2 - Fr\ 2$

The mean of the two is to be taken as the difference of level

$$\Delta L = \frac{1}{2} (\Delta L_1 + \Delta L_2)$$

Important note for all levellings

A levelling must always be checked by closing it on a point already known in elevation.

That point may be either the B.M. from which the levelling was started or another B.M. whose elevation has been determined in a previous levelling.

SURVEY OF BRIDGE SITES	No.: 4.211
	Date: 27. 7.1975
	Sig.: <i>D. James</i>

Survey methods, "Step-method" for profile measurements

Material required: Levelling-staff (4.00 m), Carpenter's level (spirit level), Steel-tape (2.00 to 3.00 m).

Summary: After the measurement of distances and differences in elevation between the pegs A,B,C,D (see 4.201) the profile between these pegs is measured in "steps". The levelling-staff will be the horizontal line and the steel-tape the vertical line of such a step. The staff is kept horizontal with the aid of the carpenter's-level, the steel-tape vertical with a plumb bob, a stone being dropped or just by eye.

Description

The measurement starts from a peg, preferably C or D (sketch on 4.202). The first one or two steps should be measured from this peg uphill and then only downhill towards peg A and B respectively.


Four persons are needed; one to watch the bubble and, together with a second one, to keep the staff in horizontal position, a third one to read and measure horizontal and vertical distances and the fourth one to note down the measurements.

The carpenter's-level must be attached to the levelling-staff.

Uphill measurement:

- Move the staff (0.00 m - end in the air, 4.00 m - end on the ground) uphill until the zero-end is directly above peg C.
- For the next step the staff must again be moved uphill until the zero-end is now directly above the point touched by the 4.00 m-end of the first step, and so on.


Sketch:

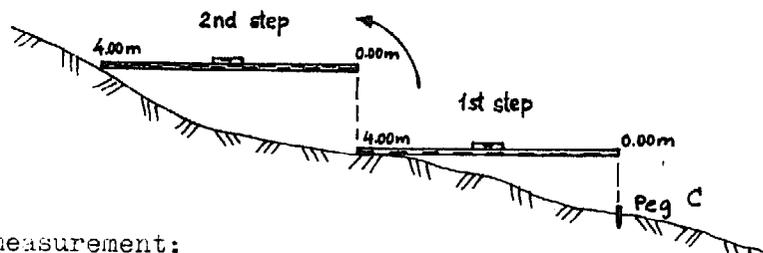

Downhill measurement:

- Set the zero-end of the staff on the peg (4.00 m - end in the air) and mark the end of the step directly down to the ground.
- Now bring the zero-end down to this mark; the 4.00 m - end will then give the origin of the next step, and so on.

Sketch:

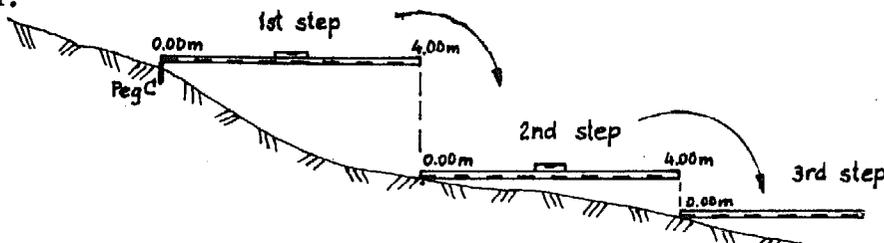

S A T A , Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITES

No.: 4.212

Survey methods, "Step-method" for profile measurements, details


Date: 27. 7.1975

Sig.: *D. Shrestha*

Detail measurements:

- In addition to the "step-heights" at the zero-end and 4.00 m - end, vertical distances are also measured at breaks in the gradient of the ground.
- For all these points the horizontal distances are read on the staff (always starting from the zero-end) and the vertical distances measured with the steel-tape.
- In steep places the "step-length" may be reduced to 3.00 m , 2.00 m or 1.50 m .

Sketch:

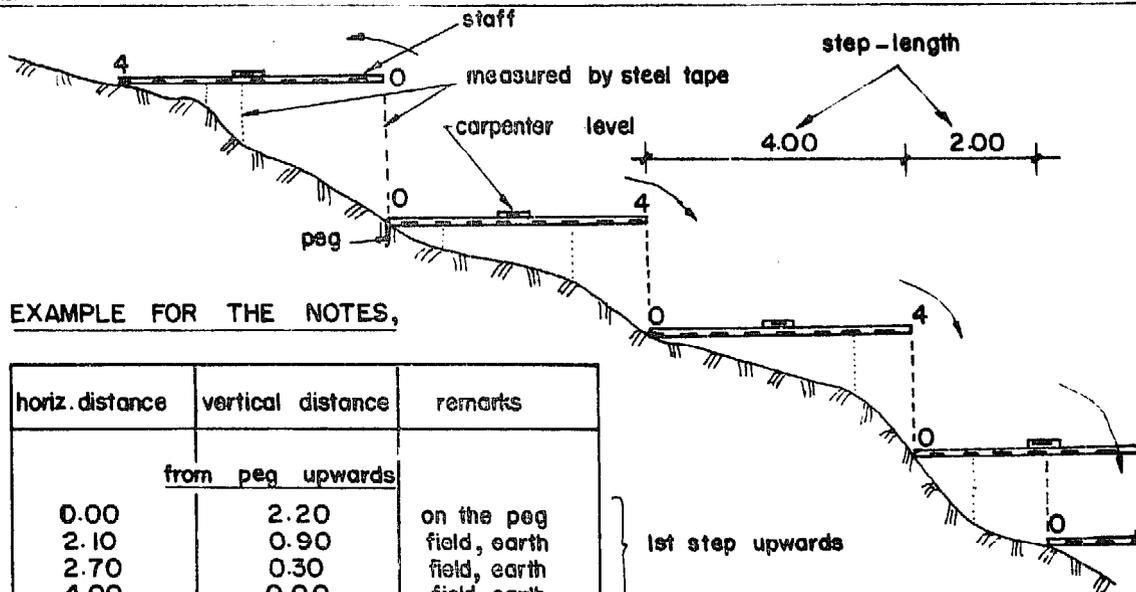

EXAMPLE FOR THE NOTES,

horiz. distance	vertical distance	remarks
from peg upwards		
0.00	2.20	on the peg
2.10	0.90	field, earth
2.70	0.30	field, earth
4.00	0.00	field, earth
from peg downwards		
0.00	0.00	on the peg
0.80	0.40	field earth
2.80	0.90	field mixed
4.00	1.80	field with
0.00	0.00	field stones
3.10	0.90	"
4.00	1.90	bushes, stones
0.00	0.00	" , stones
0.90	1.10	" "
2.00	1.40	" "
0.00	0.00	bushes , stones

1st step upwards
1st step downwards
2nd step downwards
3rd step downwards

Note: The measurements between two pegs (e.g. C and A) should be checked.

- The sum of all the step-lengths should give the horizontal distance between the pegs.
- The sum of the vertical distances at the step-ends (zero-end and 4.00 m - end) should give the difference in elevation between the pegs.


- With Measuring Tape and Plumbet (Plumb bob)

Judging by eye the tape is kept horizontal.

At least two persons are needed, one at each end of the tape.

If the difference in elevation becomes too great (more than 1.80 m) the distance should be divided into two, or more parts.

Sketch:

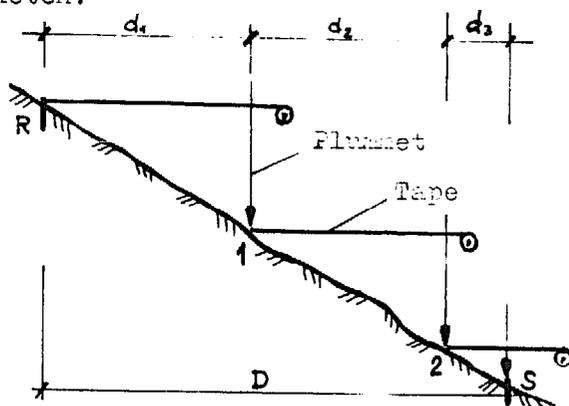

$$D = d_1 + d_2 + d_3$$

Note: The zero-end of the tape should always be on the side touching the ground.


Start measuring from the higher point towards the lower one.

For greater accuracy put a peg at every intermediate point. (at the points 1, 2 ...)

- With Theodolite and Levelling-Staff (see also 4.300)

with the aid of top and bottom hair, the staff - interception ΔL is determined. Together with the also measured vertical angle α the horizontal distance can then be calculated.

Sketch:

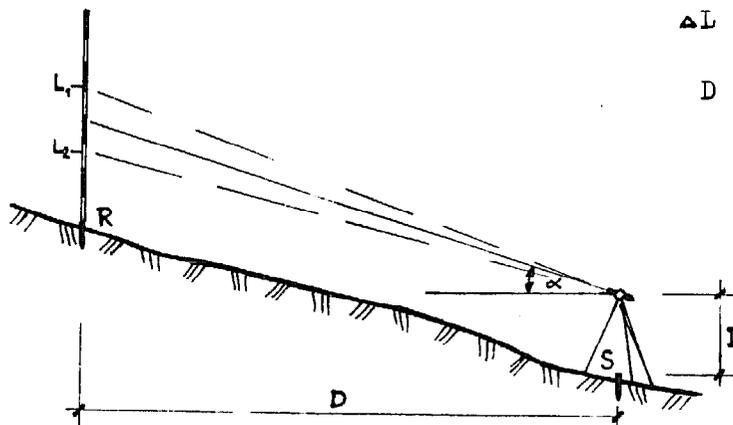

$$\Delta L = L_1 - L_2$$

$$D = 100 \times \Delta L \times \cos^2 \alpha$$

Note:


The staff must be kept vertical (check with plumbet or spirit level).

Possible accuracy obtainable by this method is about 0.3 % of the distance.

- With Theodolite and Measuring Tape

With the tape measure the direct distance "D'" from the theodolite-axis to the peg "R". With the theodolite measure the vertical angle "α" by aiming at the peg "R".

Sketch:

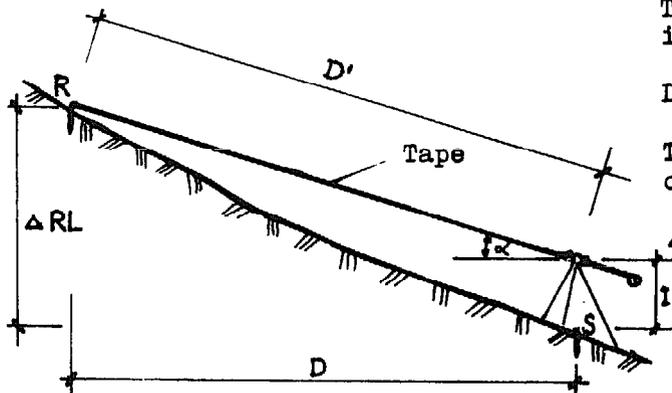

The horizontal distance is found by

$$D = D' \times \cos \alpha$$

The difference of level can also be calculated by


$$\Delta RL = D' \times \sin \alpha + i$$

Note: This method is limited to distances up to the length of the tape. It can also be applied in very steep places (rock), when R is not accessible by staff or theodolite.

- With Measuring Tape and known RL of the two points (R and S)

If the RL of the pegs "R" and "S" are known from a levelling, we can measure the direct distance D' between the two pegs by tape.

Sketch:

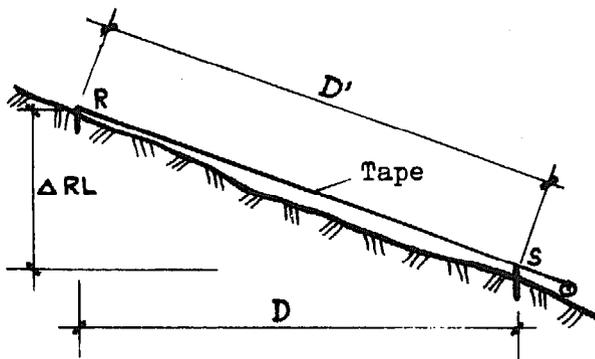

The horizontal distance is found by

$$D = \sqrt{D'^2 - \Delta RL^2}$$

or by

$$\sin \alpha = \frac{\Delta RL}{D'}$$

and then

$$D = D' \times \cos \alpha$$

Note: This method is limited by the length of the tape and the presence of obstructions between the two pegs.

- Both of these methods, applied carefully, can give high accuracy.

SURVEY OF BRIDGE SITES

No.: 4.215

Survey methods, Measurement of horizontal distances on slopes (III)

Date: 30. 7.1975

Sig.: *D. Sharma*

- With "Triangulation" (see also 4.303)


Starting from "R" or "S" set peg "P" on a line perpendicular to "RS". The distance from "RS" to "P" should be at least 10% of "D".

Measure the horizontal distance "e" by tape.


Measure the angle "ε" opposite to "e" by theodolite.

Sketches:

Section

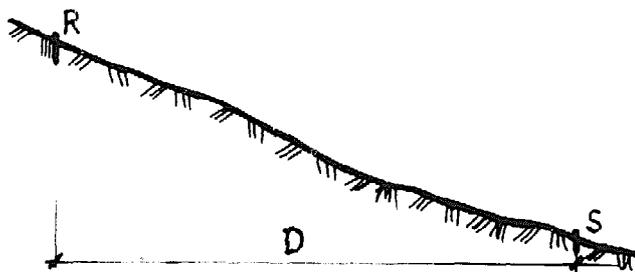

Plan

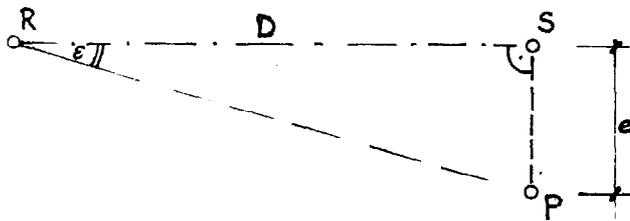

Horizontal distance is found by:

$$D = \frac{e}{\tan \epsilon} \quad \text{or}$$

$$D = e \times \cotan \epsilon$$

Note: Always measure the angle opposite to distance "e" and not the angle in "P". Measure angle "ε" at least four times, using different positions of the horizontal circle, and calculate the mean. Measure the distance "e" as accurately as possible.

Accuracy obtainable by this method is about 0.2% of the distance "D".

Example:

Theodolite in "R". Distance "e" = 6.86 m

	ε ₁	ε ₂	ε ₃	ε ₄
Reading on "S"	103°37'	146°49'	215°03,5'	278°59.5'
Reading on "P"	109°58'	153°11.5'	221°26'	285°22'
Angle "ε"	6°21'	6°22.5'	6°21.5'	6°22.5'

Mean for "ε" = 6°22' → cotan 6°22' = 8.962 → Distance "D" = 61.50m

SURVEY OF BRIDGE SITES


No.: 4.216

Survey Instruments, Levelling Instrument

Date: 15. 7. 1971

Sig.: *D. Shrestha*


NK 01

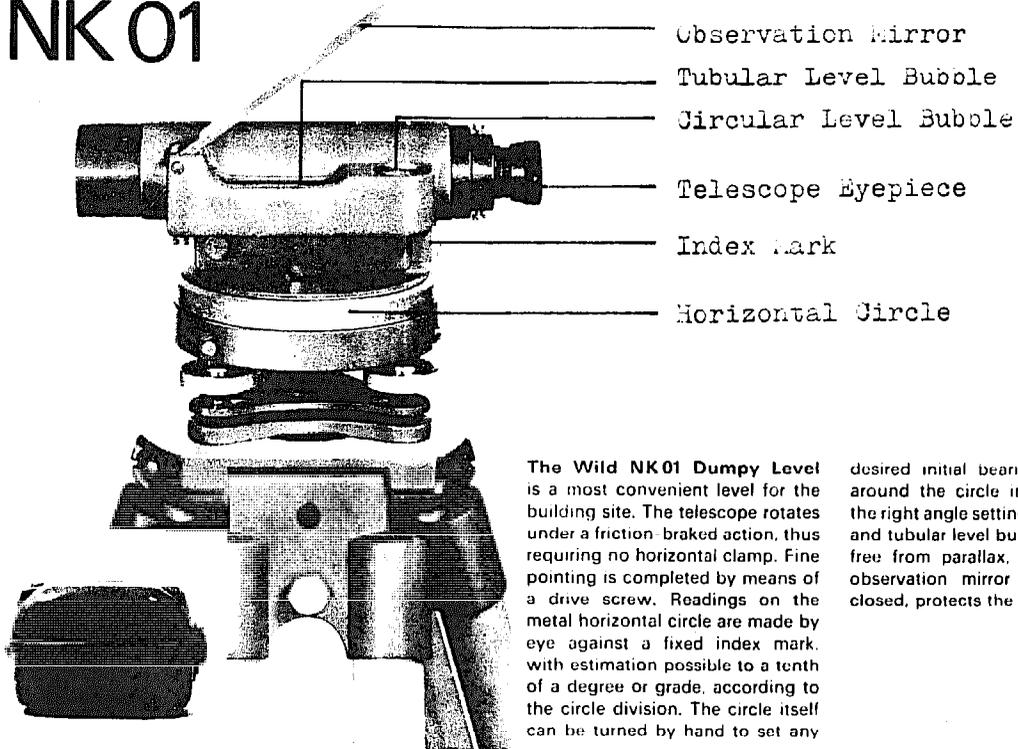

The Wild NK01 Dumpy Level is a most convenient level for the building site. The telescope rotates under a friction-braked action, thus requiring no horizontal clamp. Fine pointing is completed by means of a drive screw. Readings on the metal horizontal circle are made by eye against a fixed index mark, with estimation possible to a tenth of a degree or grade, according to the circle division. The circle itself can be turned by hand to set any

desired initial bearing. Four dots around the circle indicate rapidly the right angle settings. The circular and tubular level bubbles are seen free from parallax, in the hinged observation mirror which, when closed, protects the glass vials.


N10

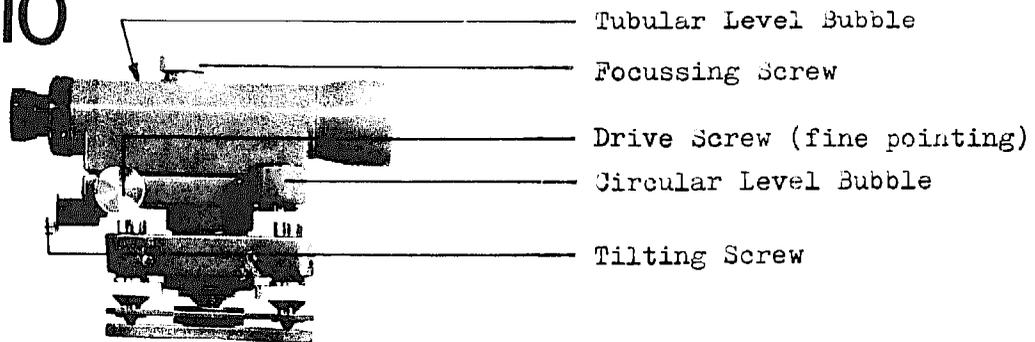

The Wild N10 (NK10) Engineers' Level is small in size but big in performance. It has all the qualities of a larger level and gives accurate results under all conditions. It is suitable for general levelling, route surveys, irrigation works, civil and constructional engineering. When fitted with a glass circle (NK10) it can be used in flat terrain for tacheometric work and for measuring and setting out horizontal angles. Rotation is friction-braked and an endless drive screw is used for fine pointing. The line of sight is levelled with the aid of a tilting screw and the well known Wild "split-bubble" image system. The tubular level is ventilated in order

to avoid excessive accumulation of internal heat and it is also well protected against damage. The N10 has an extremely short minimum focussing distance of 1 m (3.3 ft.), which is most useful in restricted spaces.

Containers. The smaller instruments (NK01, N10 and NK10) have a shock-proof plastic container which is exceptionally strong and long lasting, although very light and easy to handle. The lid of the container can be used to protect the instrument at the working site.

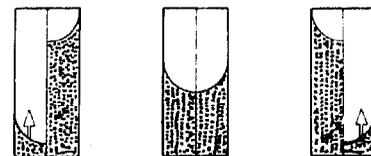

"Split-Bubble" - Image of the tubular level bubble

S.A.T.A., Swiss Association for Technical Assistance

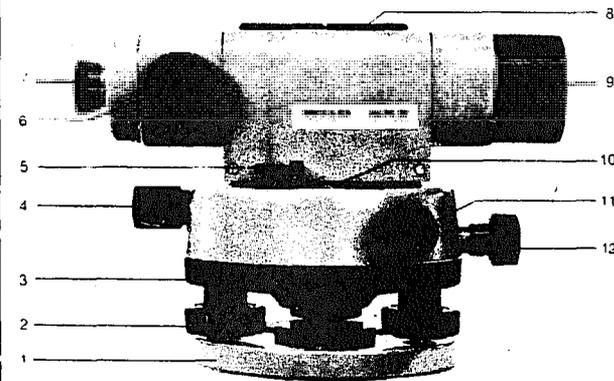


Fig. 1a Wild NK2 Engineer's Level with horizontal circle

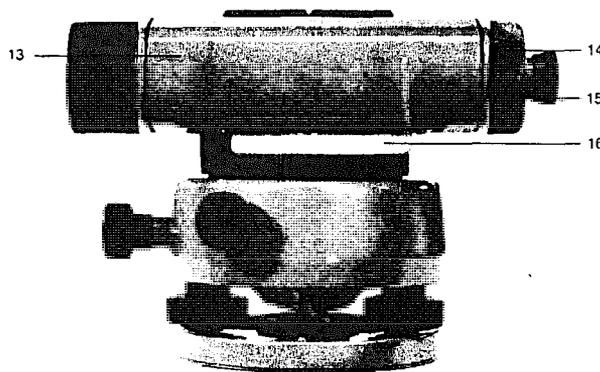


Fig. 1b Wild N2 Engineer's Level without horizontal circle

WILD N2

Engineer's Level
with rotatable telescope and
reversible tubular level

Figs. 1a and 1b

- 1 Base plate
- 2 Footscrew
- 3 Milled ring for setting the horizontal circle (only on NK2)
- 4 Reading microscope for circle (only on NK2)
- 5 Release lever for rotating the telescope and reversing the level
- 6 Focussing knob
- 7 Telescope eyepiece
- 8 Open sight with notch marking instrument centre for centring under a roof point
- 9 Telescope objective
- 10 Circular level
- 11 Endless horizontal drive with knob at each end
- 12 Tilting screw
- 13 Protective cover for tubular level
- 14 Eyepiece for observing the split bubble
- 15 Adjusting screw for the split bubble (tubular level)
- 16 Fixed reflector

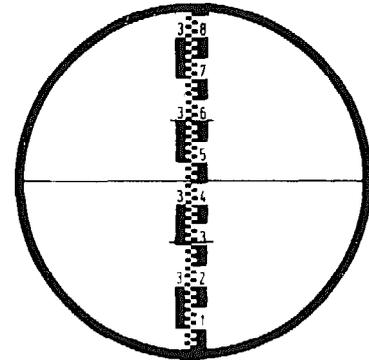


Fig. 4 Staff reading with the Wild N2 (Height: 3.456 m, Distance: 29.2 m)

The circle, divided into either 360 or 400 intervals, is viewed through a scale microscope (4) left of and below the telescope eyepiece. The circle graduations and the scale are brought into focus by turning the eyepiece of the reading microscope (4). The numbered degree (360 model) or grade (400 model) graduation lines of the circle are on the left of the image, the scale is on the right. The scale is divided into 6 intervals of 10' each (360 model) or 10 intervals of 10' each (400 model). The zero of the scale is the long upper line with two short index lines.

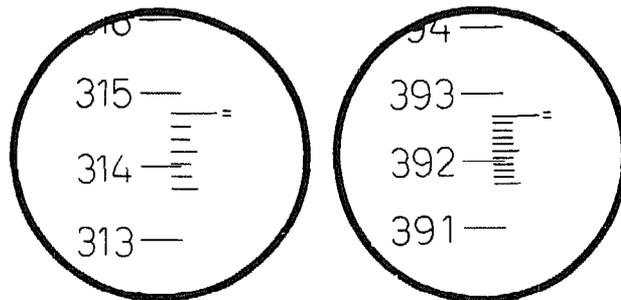


Fig. 5 Circle reading model NK2 (314° 42' 39.2659)

SURVEY OF BRIDGE SITE


Survey instruments, Levelling instrument

No. : 4.218

Date : 28.12.11 976

Sig : Pandey

**Kern GK0
Simple Construction Level**

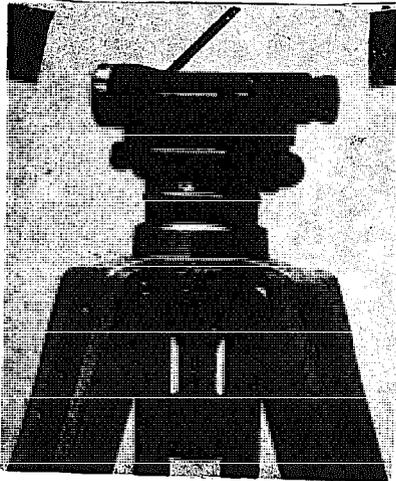


The operation of the GK0 is extremely simple and, therefore, no special skill is required to use it. This manual shows how reliable results may be obtained in the simplest way.


Measuring

Height

- Open the bubble mirror (6)
- Center the vertical hair on the rod using the horizontal slow-motion screw (7)
- Use the tilting screw (8) to center the telescope bubble




- Take the reading of the horizontal hair on the rod: 1.195 m (Fig. GK0)



Distance

- Set the upper stadia hair (the lower stadia hair in the case of the GK0-E) on the nearest decimeter using the tilting screw (8)
- Read the rod intercept between the two stadia hairs
- Multiply the rod intercept by 100 to obtain the horizontal distance: 20.5 m (Fig. GK0-E)




Specifications

Mean error in 1 km (double run)		+ 0.02 ft/7 mm
Telescope magnification		18 x
Objective aperture		0.94 in (24 mm)
Shortest focusing distance		3 ft (0.9 m)
Sensitivity of bull's-eye level		12-15" per 2 mm
Sensitivity of telescope level		40-50" per 2 mm
Centering precision, telescope level		± 4"
Circle reading, by estimation		0.1°/0.1°
Weight of instrument	GK0	1.8 lb (0.8 kg)
Weight of carrying case	GK0	1.1 lb (0.5 kg)
Dimensions of carrying case	GK0	6.7 x 3.9 x 3.9 in (17 x 10 x 10 cm)



Testing and Adjusting

- To lower the reticule (negative correction), first loosen the lower adjusting screw (10), then tighten the upper adjusting screw (11)
- To raise the reticule (positive correction), first loosen the upper adjusting screw (11), then tighten the lower adjusting screw (10)



Angle (GK0-C, GK0-EC)

- Suspend the plumb bob (found in the carrying case) from the hook within the fastening screw (1)
- Center the instrument over the ground point by lengthening or shortening the telescoping tripod legs
- Level the instrument roughly
- Set the vertical hair on the initial point
- Orient the graduated circle, i.e., set it to zero, by turning the knurled ring (9)
- Turn the telescope to sight the second point
- Read the circle: 51.3°



Kern & Co. Ltd.
Optical and
Mechanical Precision Instruments
5001 Aarau Switzerland



SURVEY OF BRIDGE SITES

No.: 4.219

Survey Instruments, Theodolite

Date: 15. 7. 1975

Sig.: *D. Shrestha*



WILD T16 Direct Reading Theodolite (face left position)

- 1 Base plate
- 2 Spring plate
- 3 Swivel locking device for tribrach
- 4 Tribrach
- 5 Circle locking lever
- 6 Resting and holding bolt
- 7 Plate level
- 8 Index level setting screw
- 9 Illumination mirror
- 10 Telescope eyepiece
- 11 Bayonet holding ring for 10
- 12 Reading microscope eyepiece
- 13 Focussing sleeve
- 14 Knob for reticle illumination, with pin for rear sight and roof centring
- 15 Vertical circle housing
- 16 Index level mirror
- 17 Fore sight
- 18 Objective
- 19 Vertical clamp
- 20 Vertical drive screw
- 21 Adjusting screw for plate level
- 22 Optical plummet eyepiece
- 23 Horizontal drive screw
- 24 Horizontal clamp
- 25 Adjusting screw for 26
- 26 Footscrew


The Wild T16 (T16E) Direct Reading Theodolite is a tachometric theodolite suitable for all low-order triangulation, tachometric detail and traverse surveys, mine surveys, property surveys, building site measurements, marking out etc.

The easily read scales of the horizontal and vertical circles, with estimation to one tenth of a minute of arc ($0.2''$), allow work to be carried out quickly. All clamps and drive screws are placed logically so that they can be manipulated safely and comfortably. The combination of the simple circle scale reading and the operation of the instrument itself makes the T16 a most useful instrument for use by trainees.

The detachable tribrach ensures that the T16 can be used with all Wild traversing equipment and, of course, the normal accessories and attachments all provide additional uses.

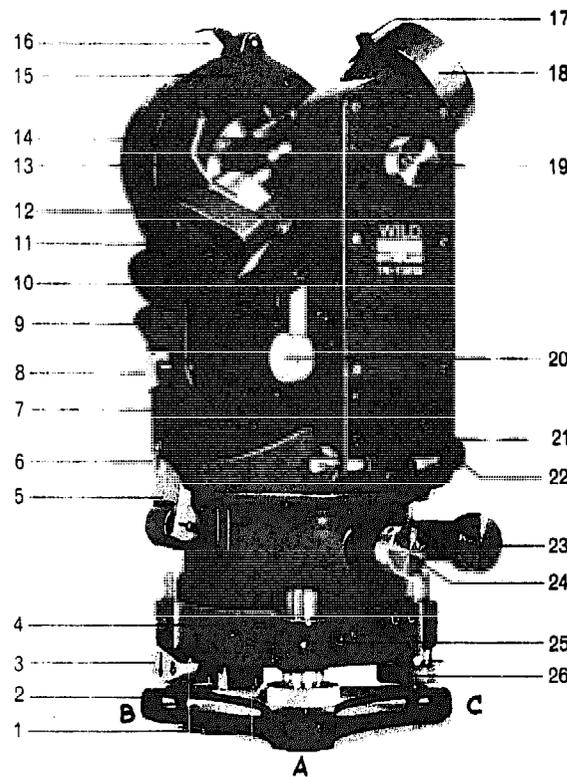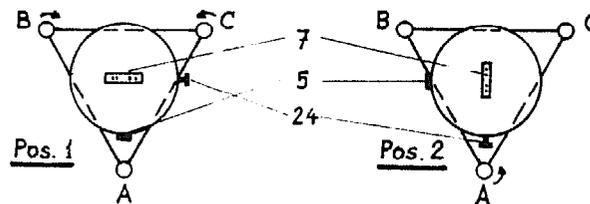"Levelling Up" of a theodolite

Example for the reading of the circles

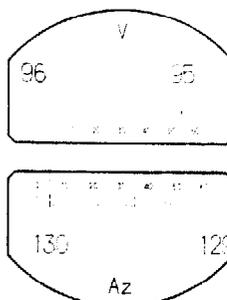

Vertical circle $95^{\circ}54.4'$
Horizontal circle $130^{\circ}04.6'$

1. Horizontal clamp (24) open and circle locking lever (5) over a footscrew A. Footscrews B and C are turned by equal and opposite rotations until the plate level bubble (7) is centred.
2. Turn the alidade through 90° in a clockwise direction and centre the bubble with footscrew A. **Repeat point 1 and 2 two times.**
3. Turn the alidade clockwise through 90° . Note the position of the bubble. Bring the bubble to a point halfway between this position and the central position by turning B and C by equal and opposite rotations.
4. Turn the alidade in the same direction through 90° . By turning A, set the bubble to the mean (halfway) position obtained in step 3.
5. The bubble should now remain in this position for all directions of the alidade. If it does not, repeat the procedure, but this time use the mean position obtained in step 3 as if it were the central position for the bubble.

The instrument is levelled up when the bubble remains in the same, though not necessarily central position, for all directions of the alidade. It is convenient to keep the plate level in adjustment so that the bubble remains in the central position.

SURVEY OF BRIDGE SITE

Survey Instruments, Theodolite


No : 4.220

Date : 28.12.1976

Sig : *P. ...*


WILD T2

Universal Theodolite
with automatic index

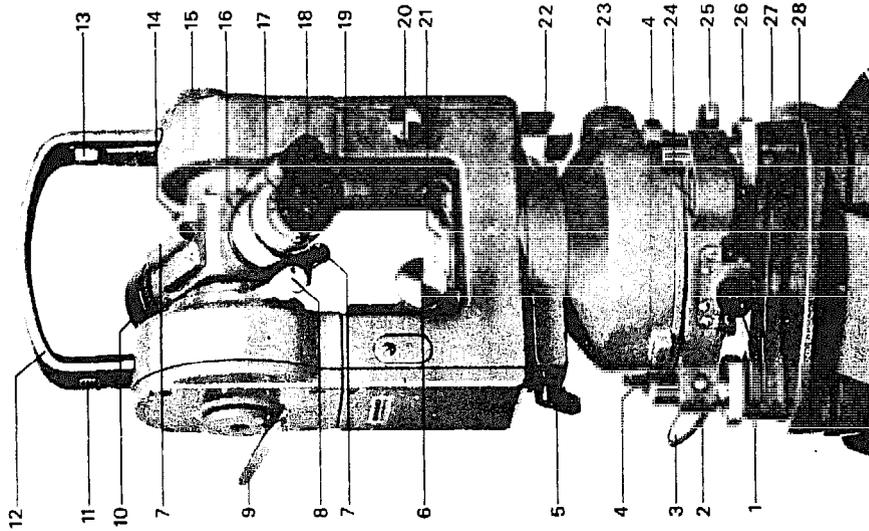


Wild T2 Universal Theodolite.

- 1 Optical plummet
- 2 Tibrach GDF6
- 3 Illumination mirror for horizontal circle
- 4 Support point. When in container instrument rests on three support points
- 5 Horizontal clamp
- 6 Vertical drive screw
- 7 Optical sight, with point for centring under roof points
- 8 Vertical clamp
- 9 Illumination mirror for vertical circle
- 10 Telescope objective
- 11 Safety catch for carrying handle
- 12 Carrying handle or carrying handle
- 13 Locking screw (view telescope)
- 14 Illumination. When using electric lighting, move lever towards objective until it reaches its stop
- 15 Micrometer knob
- 16 Focussing sleeve
- 17 Bayonet ring, locks eyepiece in position
- 18 Eyepiece of reading microscope
- 19 Telescope eyepiece with dioptric scale
- 20 Selector knob for Hz and V reading
- 21 Plate level
- 22 Horizontal drive screw
- 23 Cover for bubble drive knob
- 24 Circular bubble
- 25 Swivel locking knob
- 26 Arrow UP = unlocked
- 27 Arrow DOWN = locked
- 28 Knob is secured in arrow DOWN position by recessed screw when instrument leaves factory
- 29 Footscrew
- 30 Base plate
- 31 Spring plate

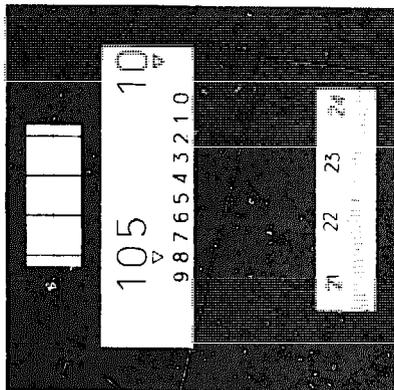

Reading example 400^o model, horizontal or vertical circle. Graduation lines in coincidence, reading=105.8224^o

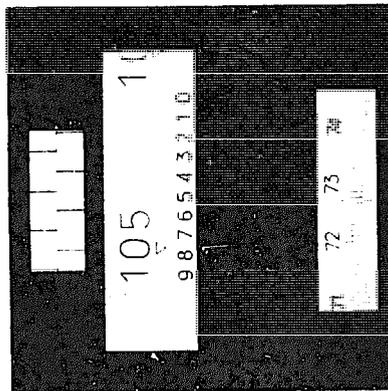

400^o model
Field of view of the reading microscope before setting the graduation lines in coincidence

SURVEY OF BRIDGE SITE

Survey Instruments, Theodolite


No 4.221

Date : 28.12.76

Sig : Panchan

WILD RDS

Self-Reducing Tacheometer

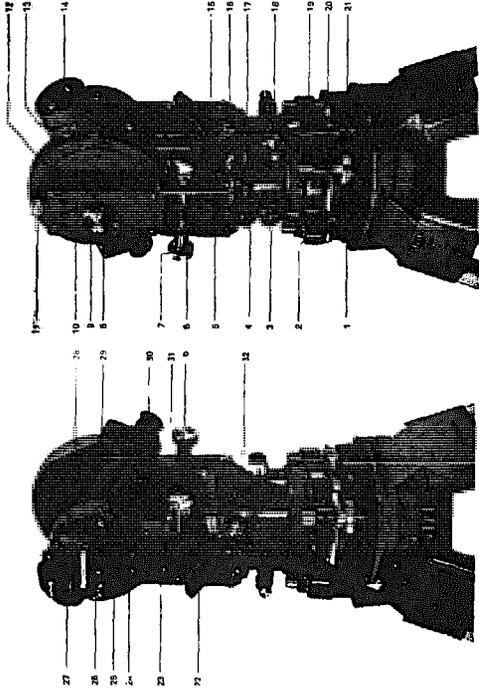

Wild RDS Self-reducing Tacheometer on GST20 tripod (Face Left position)

- | | |
|--|---|
| 1 Footscrew | 18 Horizontal drive screw |
| 2 Circular level | 19 Adjusting screw for 1 |
| 3 Horizontal clamp | 20 Swivel knob locking device (with safety screw) |
| 4 Holding bolts | 21 Base plate |
| 5 Adjusting screw for 15 | 22 Illumination mirror |
| 6 Vertical drive screw | 23 Index level setting screw |
| 7 Regulating screw for 6 | 24 Vertical circle housing |
| 8 Focusing knob | 25 White dot indicating height of tilting axis |
| 9 Diagram housing | 26 Adjusting screw for 27 |
| 10 Recessed hexagonal screws | 27 Index level |
| 11 Vertical clamp | 28 Adjusting screw for the horizontal collimation error |
| 12 Diagram plate adjustment screw (objective side) | 29 Open sight |
| 13 Foresight | 30 Telescope eyepiece |
| 14 Objective | 31 Reading microscope eyepiece |
| 15 Plate level | 32 Circle locking lever |
| 16 Optical plummet | |
| 17 Cover screw for the adjustment of 16 | |

Levelling Up

As a memory aid in levelling-up, it should be noted that the level bubble follows the direction of the left thumb when turning the footscrews. The alidade level should be protected from direct sun rays as these may cause the bubble to run off, giving a false level. An approximate levelling is made by using the footscrews to centre the circular bubble. Then proceed as follows:

- Horizontal clamp (3) open and circle locking lever (32) over a footscrew A. Footscrews B and C are turned by equal and opposite rotations until the plate level (15) bubble is centred.
- Turn the alidade through 90° in a clockwise direction until the horizontal clamp is over footscrew A. Centre the bubble again with this footscrew remembering the rule of the left thumb.
- Turn the alidade clockwise through 90°. Note the position of the bubble. Bring the bubble to a point halfway between this position and the central position by turning B and C by equal and opposite rotations.
- Turn the alidade in the same direction through 90°. By turning A, set the bubble to the mean (halfway) position obtained in step 3.
- The bubble should now remain in this position for all directions of the alidade. If it does not, repeat the procedure, but this time use the mean position obtained in step 3 as if it were the central position for the bubble. The instrument is levelled up when the bubble remains in the same, though not necessarily central position, for all directions of the alidade. It is convenient to keep the plate level in adjustment so that the bubble remains in the central position. See section 6.3 for the adjustment procedure.

Measuring Vertical Angles

With the telescope in the Face Left position (open sights of the telescope are above) bring the short horizontal cross hair (43, fig. 2) on to the target by means of the vertical drive (6). Centre the index level (27) by turning its setting screw (23) until the two ends of the split bubble are seen in coincidence in the prism. Now take the vertical circle reading. If the observer knows that the instrument is properly adjusted for vertical collimation (index) error and an accuracy of 1' (25") is needed it will be sufficient to observe in Face Left only. If more accuracy is required transit to Face Right (open sights below the telescope) and repeat the observation. The mean vertical angle from the Face Left and Face Right readings is free from vertical collimation error.

The reading A_L in Face Left is the zenith angle ζ , the reading A_R in Face Right is $(360^\circ - \zeta)$ or $(4000 - \zeta)$. The vertical angle β (elevation + or depression -) can be derived from the vertical circle readings as follows: -

$$\beta_L = 90^\circ - A_L \text{ or } 100^\circ - A_L$$

$$\beta_R = A_R - 270^\circ \text{ or } A_R - 300^\circ$$


$$\beta = \frac{1}{2} (\beta_L + \beta_R)$$

$$\zeta = \frac{1}{2} (A_L - A_R) \quad (360^\circ \text{ or } 400^\circ \text{ has to be added to } A_L)$$


Example

360°	$A_L = 83^\circ 23.2'$	$\beta_L = +6^\circ 36.8'$
	$A_R = 276^\circ 36.4'$	$\beta_R = +6^\circ 36.4'$
	$A_L + A_R = 359^\circ 59.6'$	$\beta = +6^\circ 36.6'$
	$A_L - A_R = 166^\circ 46.8'$	$\zeta = 83^\circ 23.4'$
	$2l = -0.4'$	
4000	$A_L = 107.8640$	$\beta_L = -7.8640$
	$A_R = 292.1540$	$\beta_R = -7.8460$
	$A_L + A_R = 400.0180$	$\beta = -7.8550$
	$A_L - A_R = 215.7100$	$\zeta = 107.8550$
	$2l = +0.0180$	


Reduction by this method is self-checking. The sum $A_L + A_R$ should always be constant within $\pm 0.2'$ or $\pm 0.3''$. The difference of $A_L + A_R$ from 360° or 4000 is twice the vertical collimation error l , which can be adjusted if necessary as described in 6.6.

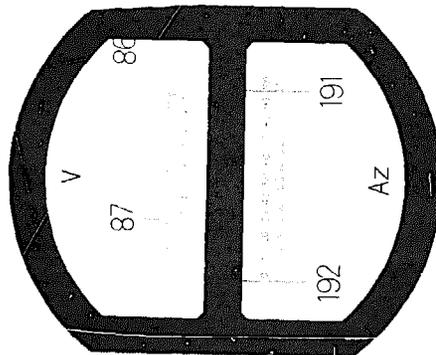

Circle reading 100° - Vertical 191.81 255 - Horizontal (A.L.) 108.868°

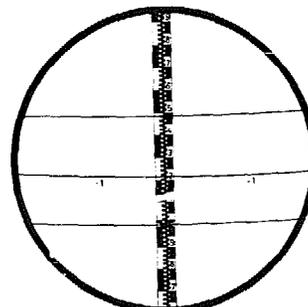

Circle reading in a 6.41 (C.V.) V.I. metric staff - Horizontal distance 68.0 m
Height difference $\Delta H = -1.212 \text{ m} = -21.8 \text{ m}$

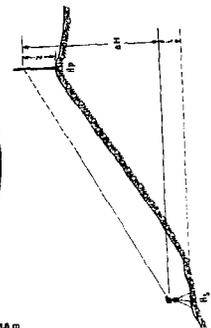

S.A.T.A., Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITE

Survey Instruments, Theodolite

No. : 4.222

Date : 28.12.1976

Sig : *Paruchan*

WILD TO

Compass Theodolite

3. Description

(In this booklet, face left (right) position means that the vertical circle is left (right) of the line of sight)

3.1 The Instrument

3.1.1 The Lower Part (fig. 1 at the end of the booklet)

The lower part of the instrument is firmly secured to the base plate (1) of the metal container by means of three screws inserted from below. It has the usual three footscrews (3), each of which can be regulated by an adjustment screw (4). The lower part also contains the compass circle with a jewel bearing (fig. 4). By pressing down the lever (2) and then moving it slowly left (clockwise) until it reaches the stop, the compass circle is lowered onto a sharp steel pivot and is free to rotate. Moving the lever to the right (anticlockwise) lifts the circle from the pivot and, before moving the instrument, the lever must always be raised and pushed into the small notch.

3.1.2 The Alidade (figs. 1 and 2)

The lower part of the alidade, together with the horizontal clamp (21) and drive (22), is fastened to the upper part by means of three capstan-headed screws (5) which are screwed into the circular housing from below. The upper part of the alidade has the telescope standards, the telescope and the vertical circle reading microscope (17). One of the standards holds the vertical circle housing (13), the vertical circle illumination window (fig. 2, 25), the vertical circle index level (12), the setting screw (8) for the index level, and the two reading eyepieces (10) for the horizontal circle. The change-over knob (9) enables readings to be made from the observer's side of the instrument in either the face left or face right position. The other standard holds the vertical clamp (15), the vertical drive (18), and the micrometer drum (19) which is graduated in one minute (2') intervals and is used for setting the horizontal circle graduations in coincidence. Between the standards there is a circular bubble (20) and two windows (6) for the illumination of the compass or horizontal circle. The telescope has 20x magnification, coated optics and internal focusing which is controlled by the focusing sleeve (11). The telescope can be transmitted via the objective end and has a vertical sighting range of +45° to -55° in both face left and face right positions. The reticle (fig. 8) has two sets of stadia hairs with multiplication constants 50 and 100.

3.1.3 The Compass Circle and its Reading System (figs. 2 and 3)

Below the horizontal circle, there is a strong magnet (29), which brings the zero of the freely-swiveling circle to Magnetic North, so that the subsequent horizontal circle reading is a magnetic bearing. Depending on the earth's magnetic field the inclination of the compass circle will vary, but inclination from the horizontal can be counter-balanced by moving the balance weights (31) along their slots. For adjustment see 6.2.3. To eliminate the influence of eccentricity, as the circle swings on a pivot instead of being rigidly centred, it is read at two diametrically opposed positions. As in a precision theodolite (T2 or T3), the images of the diametrically opposed graduation lines, which are observed in the eyepieces (10), are brought into coincidence by turning the micrometer drum (19). On turning the change over knob (9) for face right readings, the combined image of the diametrically opposed parts of the circle is inverted with the result that the same image is seen in face right as in face left; i.e. the circle readings are the same in both positions and do not differ by 180° as is usually the case.

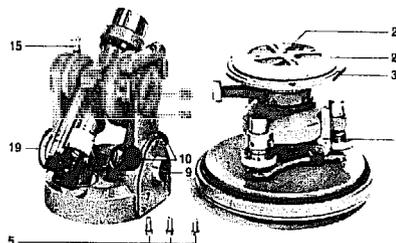


Fig. 2 TO with the upper part of the alidade removed

- | | |
|--|---|
| 2 Lever for damping and lifting the compass circle | 24 Adjustment screw for index level |
| 3 Fastening screws | 25 Illumination window for the vertical circle |
| 4 Change-over knob for 10 | 26 Compass circle |
| 5 Reading eyepiece for compass circle | 28 Bearing (pivot point) for the compass circle |
| 15 Vertical clamp | 30 Fitting position or flange |
| 19 Micrometer drum | |

Measuring Methods

The Wild TO allows the measurement of:
 - an individual magnetic bearing to each target
 - sets of directions with the circle oriented to magnetic north
 - angles or sets of directions with the circle not oriented.
 For accurate measurements, readings should be taken in both positions, i.e. face left and face right. Note that the two readings will not differ by 180° (200°) as is the case with other theodolites (see 3.1.3).

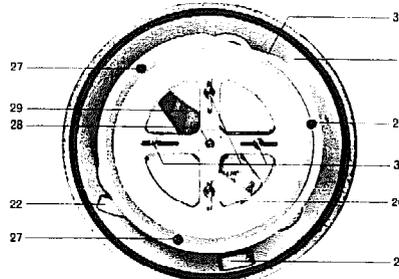


Fig. 3 The Compass circle

- | | |
|---------------------------|-------------------------------|
| 1 Base plate | 28 Compass bearing |
| 21 Horizontal clamp | 29 Magnet |
| 22 Horizontal drive screw | 30 Fitting position or flange |
| 23 Compass circle | 31 Balance weights |
| 27 Capstan screw holes | |

4.5.2 The Horizontal (Compass) Circle (fig. 5)

On each side of the standard carrying the vertical circle there is a reading eyepiece (10) for viewing and reading the compass circle. The change-over inverter knob (9) always allows the reading to be made from the observer's side of the instrument. The circle reading is made by looking obliquely downwards into the eyepiece lens from a distance of about 4 in (10 cm) (i.e. the distance from the telescope eyepiece). Two images are seen, corresponding to the diametrically-opposite parts of the circle, one being inverted and on top of the other. For accurate observation the eye level must be moved until the upper and lower graduation lines appear to be the same length. As the images cover fairly large sectors of the circle, only the lines in the centre of the field of view appear to be parallel (fig. 5) and are used for coincidence setting. The micrometer drum (19) is turned until the upper and lower lines in the centre of the field coincide. The first upright number of the lower image, to the left of the centre of the field of view, gives the tens of degrees (grades). The inverted number of the upper image differing from this value by exactly 180° (or 200°) represents the corresponding diametrically-opposite graduation line and each interval between the two numbers represents 1° (1'). The intervals are counted and are added to the tens of degrees (grades). The inverted number will always be to the right of the upright one except when the circle reading is an exact number of tens of degrees (grades), in which case the two numbered graduations will coincide in the centre, i.e. the inverted number will appear above the upright one. The reading on the micrometer drum is then taken - direct reading to 1' (2'). The total reading, circle and micrometer, is the mean reading for the two diametrically opposite parts of the circle.




Fig. 5 Horizontal circle reading
(360°) 79' 42" (400°) 18.24"

4.5.3 The Vertical Circle (fig. 6)

Before reading the vertical circle via the microscope (17), the index level (12) must be centred by turning the setting screw (8). The field of view provides an image of two diametrically-opposite parts of the circle. There is no micrometer, however, and consequently no coincidence setting is possible. In the face left position zenith angles are read and in face right nadir angles. In the upper image the numbering is upright and increases from left to right, whilst in the lower image it is inverted and increases from right to left. Each graduation image is marked with either I or II (i.e. face left or face right), the upper number always indicating the telescope position. To read the circle, the upright number (in the upper image) nearest to the middle and on the left side, is taken as the number of degrees (grades). The intervals between this number and the same, but inverted, number

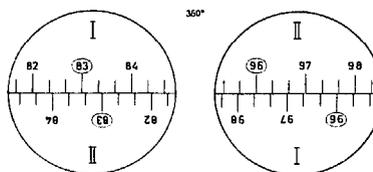


Fig. 6 (360°) FL 83° 14' FR 96° 42' Mean 6° 40'
(400°) FL 88.14° FR 101.84' Mean 1/2 = 1.85'

(in the lower image) are counted, each one representing half its nominal value, i.e. an interval represents 10 (10'). As no coincidence setting has been possible there will normally be a portion of an interval to be estimated. This is done to a fraction of an interval (i.e. to 1' or 2'). If FL and FR are the face left (I) and face right (II) readings, the vertical angle δ is obtained as follows:

$$\delta_L = 90^\circ - FL (100^\circ - FL)$$

$$\delta_R = FR - 90^\circ (FR - 100^\circ)$$

or the mean can be found from:

$$\delta = \frac{1}{2} (FR - FL)$$

**Self-reducing
Engineer's
Tachymeter Theodolite
K1-RA**

- 1 Illuminating mirror
- 2 Circle reading eyepiece
- 3 Vertical slow-motion screw
- 4 Coarse-fine circle orienting drive with safety cover
- 5 Leveling knob
- 6 Focusing knob
- 7 Selector ring for horizontal distances or difference in elevation
- 8 Finder-collimator
- 9 Switch-over knob for clockwise or counterclockwise reading on the horizontal circle
- 10 Terminal for electric illumination
- 11 Horizontal slow-motion screw
- 12 Micrometer knob

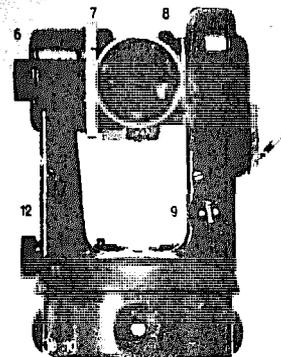
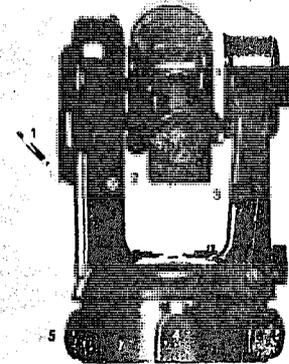


Fig. 3 Centering tripod

- 1 Centering socket
- 2 Instrument support plate
- 3 Tripod head
- 4 Release button
- 5 Centering rod
- 6 Guard ring
- 7 Bullseye level housing
- 8 Bayonet locking lever
- 9 Spherical zone
- 10 Tripod plate
- 11 Clamping grip
- 12 Centimeter scale (height of instrument above station point)
- 13 Bullseye level



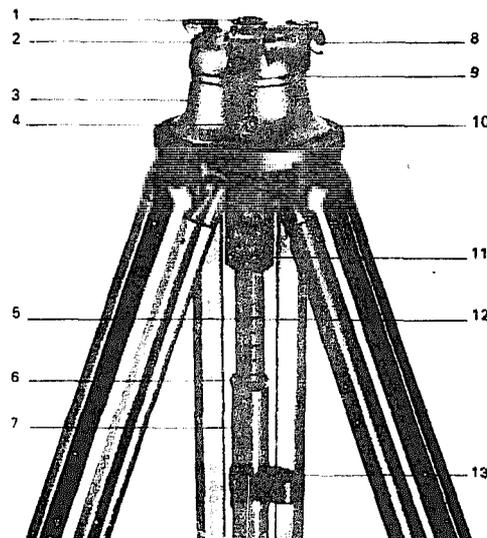


Fig. 5 Examples of circle readings

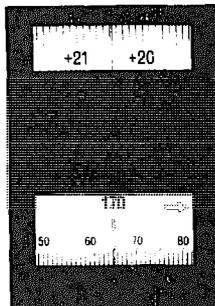

Vertical circle +0.2047
400° Horizontal circle with micrometer. Clockwise scale 170° 65' 30"

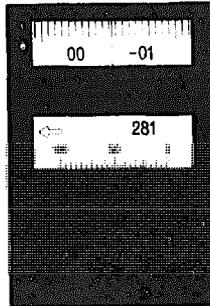

Vertical circle -0.0054
400° Horizontal circle with scale microscope. Counterclockwise scale 281° 22'

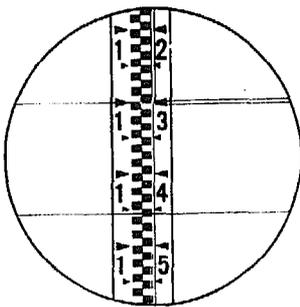


Fig. 6 Horizontal distance reading 15.6 m
Setting of selector ring D

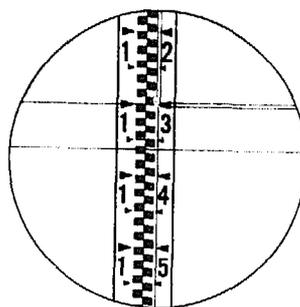


Fig. 7 Difference in elevation reading 6.4 m
Setting of selector ring H
Sighting height on rod 1.30 m

A.T.A. Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITE

No : 4.301

Soil investigation, Field tests

Date : 28.12.1976

Sig : *Pandora*

3.1 Introduction

The purpose for soil investigation is to obtain information as bases for:

1. The selection of type and depth of foundation
2. The determination of bearing capacity of the selected foundation
3. The evaluation of the earth pressure against walls, abutments
4. The provisions against constructional difficulties.

In general, any investigation should start with the collection and examination of the already existing data about the soil and geological conditions of the site. In many areas the existing local knowledge and the behaviour of existing structures are very helpful. If the existing information is not sufficient or is inconclusive, the site should be explored in detail.

An inspection of the site and study of topographical features is rather helpful in getting useful informations about the soil and in deciding the future programme of exploration. On going over the site, a study of the following features may be useful: local topography, excavations, cuttings, evidence of erosion or landslides, fills, water level in the river, flood marks etc. If there has been an earlier use of the site, informations should be gathered, in particular about the underground workings, if any, and about the locations of fills and excavations.

3.2 Field tests

The various methods of site exploration may be grouped as follows:

1. Open excavation
2. borings
3. Sub-surface sondings
4. Geophysical methods.

The first two methods are described in this chapter.

3.2.1 Open excavation

Test pits and trenches can be used for all types of soils. Soils can be inspected in their natural condition and samples, disturbed or undisturbed can be conveniently taken. There are generally considered depths of excavation up to 3 m.

SURVEY OF BRIDGE SITE

No : 4.502

Soil investigation, Field tests

Date : 28.12.1976


Sig : *audan*

Open test pits are suitable for the examination of comparatively shallow foundations, for determining the difficulty or ease of excavation, the necessity or otherwise of shoring etc.

but afford, within their limits, the most satisfactory evidence regarding the true nature of the strata. A test pit should be minimum 0.6 m by 1.2 m in plan so that a labourer can easily bend down and ply his tools.

It should be remembered that the locations for a test pit should be so selected that it will not later come under the foundation of the structure. A typical open test pit is shown in the sketch below.

Open test pit

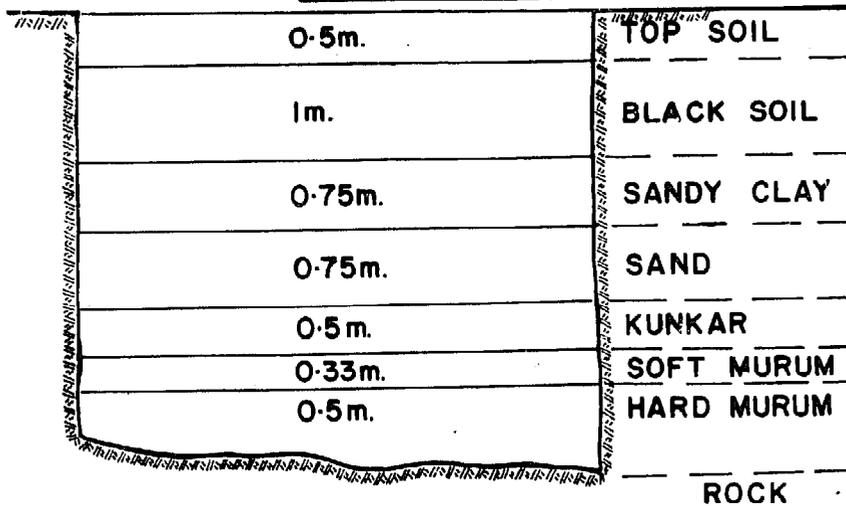

3.2.2 Borings

a) Probing

Probing is confined to shallow foundations in soft strata like clay, sand, gravel etc. A steel bar of about 32 mm diameter, painted at one end, and of suitable length (Fig. 1) according to the depth of the soft or loose material, is forced vertically into the ground and worked like a jumper until a hard substratum is tapped. A hammer may be used with advantage for driving the bar down. It may be withdrawn from time to time and the point examined for traces of the material met with, sticking to it. The nature of the final hard stratum

SURVEY OF BRIDGE SITE


No : 4.505

Soil investigation, Field tests

Date : 28.12.1976

Sig : *bandaru*

encountered may be recognized by the feel, sand, and the particles sticking to the point and the depth of the bore measured. For testing shallow foundations in clay or sand, an instrument called "wood auger" is often very useful. It is just like the auger for drilling holes in wood, but a little stronger (Fig. 2).

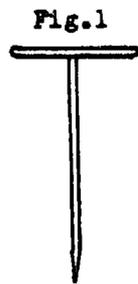


b) Auger boring

Augers are used in cohesive and other soft soils above water table. Hand-augers are used for depths up to about 6 m. Samples recovered from the soil brought up by augers are badly disturbed and are useful for identification purposes only. The sketch below shows a posthole auger and a helical (spiral) auger.

HAND AUGERS

(a) Post hole auger

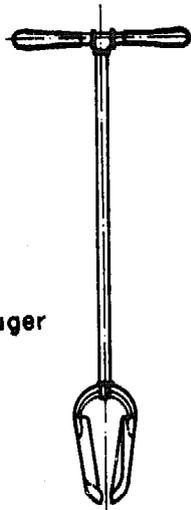

(b) Helical auger



SURVEY OF BRIDGE SITE

No : 4.504

Soil investigation, Field tests, Laboratory tests


Date : 28.12.1976

Sig : *Laudan*

c) Vane test

This test is applied particularly to soft clays or silts, which, on account of their softness, do not stand other tests. The device as illustrated in the sketch below, consists of an assembly of four vanes fixed to the bottom of the central vertical rod. It is pushed into soil at the bottom of a borehole and rotated. The torque required to rotate the vane is measured at the top, which gives a measure of the consistency of the soil.

Apparatus for Vane test

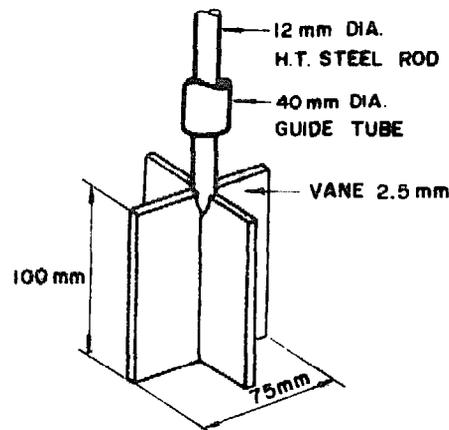

3.3 Laboratory tests

Some of the various experiments which can be done in the laboratory are described roughly in this chapter.

a) Determination of water content by oven drying method

The object of this test is to determine the water content of a soil sample in the laboratory by oven drying method. This experiment forms an essential part of many other laboratory experiments.

Reference to Indian Standard: IS:2720 (Part II) - 1969, Method of Test for Soils: Part II: Determination of Moisture content.

b) Determination of specific gravity of soil by density bottle

The object of the test is to determine the specific gravity of soil fraction passing 4.75 mm IS sieve by density bottle. This test can also be done by pycnometer.

SURVEY OF BRIDGE SITE
 Soil investigation
 Laboratory tests, Classification,

No : 4.305

Date : 28.12.1976

Sig : *Andau*

c) Determination of grain size distribution by sieving

The object of this experiment is to determine grain size distribution of coarse grained soil by sieving. The test covers both coarse sieve analysis (for gravel fraction) as well as fine sieve analysis (for sand fraction).

d) Determination of grain size distribution by hydrometer

The object of this experiment is to determine the distribution of particle size, finer than 75 micron sieve, by sedimentation analysis, using a density hydrometer, and then to plot the grain size distribution curve. This test can also be done by using a sampling pipette.

3.4 Classification

General

The purpose of soil classification is to arrange various types of soil into groups according to their engineering properties and various other characteristics. Soil possessing similar characteristics can be placed in the same group. From the engineering point of view, the classification may be done with the objective of finding the suitability of the soil for construction of foundations etc.

Particle size classification

In this system, soils are arranged according to the grain size. Terms such as gravel, sand, silt and clay are used to indicate grain sizes. These terms are used only as distinction of particle sizes and do not signify the naturally occurring soil types, which are mixtures of particles of different sizes and exhibit definite characteristics. It is preferable to use the word 'silt size' and 'clay size' in place of simply 'silt' or 'clay' in this system. There are various grain size classifications in use. The more commonly used systems are: The M.I.T. classification proposed by Prof. G. Gilbay of Massachusetts Institute of Technology as a simplification of the Bureau of Soils classification, and Standard classification (IS:1948-1970) based on the M.I.T. system. This system is shown in the sketch below.

	0.002	0.075	0.425	2	4.75	20	80	300	
Clay (Size)	Silt (Size)	Fine	Med.	Coarse	Fine	Coarse	Cobble	Boulder	
		Sand			Gravel				

T. A. Swin Consulting & Technical Services

SURVEY OF BRIDGE SITE

Soil investigation

Classification

No : 4.10

Date : 20.1.1977

Sig : *Handwritten signature*

UNIFIED SOIL CLASSIFICATION CHART

UNIFIED SOIL CLASSIFICATION
INCLUDING IDENTIFICATION AND DESCRIPTION

FIELD IDENTIFICATION PROCEDURES (Excluding particles larger than 3 inches and basing fractions on estimated weights)		GROUP SYMBOLS	TYPICAL NAMES			
COARSE GRAINED SOILS More than half of material is larger than No. 200 sieve size.	GRAVELS More than half of coarse fraction is larger than No. 4 sieve size.	CLEAN GRAVELS (Little or no fines)	Wide range in grain size and substantial amounts of all intermediate particle sizes. GW Well graded gravels, gravel-sand mixtures, little or no fines.			
		GRAVELS WITH (Appreciable amount of fines)	Predominantly one size or a range of sizes with some intermediate sizes missing. GP Poorly graded gravels, gravel-sand mixtures, little or no fines.			
		GRAVELS WITH (Appreciable amount of fines)	Non-plastic fines (for identification procedures see ML below). GM Silty gravels, poorly graded gravel-sand-silt mixtures.			
		GRAVELS WITH (Appreciable amount of fines)	Plastic fines (for identification procedures see CL below). GC Clayey gravels, poorly graded gravel-sand-clay mixtures.			
	SANDS More than half of coarse fraction is smaller than No. 4 sieve size. (For visual classification, the size may be used as equivalent to the No. 4 sieve size.)	CLEAN SANDS (Little or no fines)	Wide range in grain sizes and substantial amounts of all intermediate particle sizes. SW Well graded sands, gravelly sands, little or no fines.			
			Predominantly one size or a range of sizes with some intermediate sizes missing. SP Poorly graded sands, gravelly sands, little or no fines.			
		SANDS WITH (Appreciable amount of fines)	Non-plastic fines (for identification procedures see ML below). SM Silty sands, poorly graded sand-silt mixtures.			
			Plastic fines (for identification procedures see CL below). SC Clayey sands, poorly graded sand-clay mixtures.			
			IDENTIFICATION PROCEDURES ON FRACTION SMALLER THAN No. 40 SIEVE SIZE			
			FINE GRAINED SOILS More than half of material is smaller than No. 200 sieve size. (The No. 200 sieve is about the smallest particle visible to the naked eye)	SILTS AND CLAYS Liquid limit less than 50	DRY STRENGTH (Crushing characteristics)	DILATANCY (Reaction to shaking)
None to slight	Quick to slow	None			ML	Inorganic silts and very fine sand, rock flour, silty or clayey fine sands with slight plasticity.
Medium to high	None to very slow	Medium			CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays.
Slight to medium	Slow	Slight		OL	Organic silts and organic silt-clays of low plasticity.	
SILTS AND CLAYS Liquid limit greater than 50	Slight to medium	Slow to none		Slight to medium	MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts.
	High to very high	None		High	CH	Inorganic clays of high plasticity, fat clays.
	Medium to high	None to very slow	Slight to medium	OH	Organic clays of medium to high plasticity.	
HIGHLY ORGANIC SOILS		Readily identified by color, odor, spongy feel and frequently by fibrous texture.	Pt Peat and other highly organic soils.			

IATA, Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITE

Soil investigation
Classification

No : 4.501

Date : 20.1.1977

Sig : *Paudyal*

UNIFIED SOIL CLASSIFICATION CHART

UNIFIED SOIL CLASSIFICATION

INCLUDING IDENTIFICATION AND DESCRIPTION

FIELD IDENTIFICATION PROCEDURES (Excluding particles larger than 3 inches and basing fractions on estimated weights)		GROUP SYMBOLS	TYPICAL NAMES			
<p>COARSE GRAINED SOILS More than half of material is larger than No. 200 sieve size.</p> <p>GRAVELS More than half of coarse fraction is larger than No. 4 sieve size. (For visual classification, the size may be used as equivalent to the No. 4 sieve size.)</p> <p>SANDS More than half of coarse fraction is smaller than No. 4 sieve size. (For visual classification, the size may be used as equivalent to the No. 4 sieve size.)</p>	CLEAN GRAVELS (Little or no fines)	GW	Well graded gravels, gravel-sand mixtures, little or no fines.			
	GRAVELS WITH (Appreciable amount of fines)	GP	Poorly graded gravels, gravel-sand mixtures, little or no fines.			
	GRAVELS WITH (Appreciable amount of fines)	GM	Silty gravels, poorly graded gravel-sand-silt mixtures.			
	GRAVELS WITH (Appreciable amount of fines)	GC	Clayey gravels; poorly graded gravel-sand-clay mixtures.			
	CLEAN SANDS (Little or no fines)	SW	Well graded sands, gravelly sands, little or no fines.			
	SANDS WITH (Appreciable amount of fines)	SP	Poorly graded sands, gravelly sands, little or no fines.			
	SANDS WITH (Appreciable amount of fines)	SM	Silty sands, poorly graded sand-silt mixtures.			
	SANDS WITH (Appreciable amount of fines)	SC	Clayey sands, poorly graded sand-clay mixtures.			
	IDENTIFICATION PROCEDURES ON FRACTION SMALLER THAN No. 40 SIEVE SIZE					
	<p>FINE GRAINED SOILS More than half of material is smaller than No. 200 sieve size. (The No. 200 sieve is about the smallest particle visible to the naked eye)</p>	<p>SILTS AND CLAYS Liquid limit less than 50</p>	DRY STRENGTH (Crushing characteristics)	DILATANCY (Reaction to shaking)	TOUGHNESS (Consistency near plastic limit)	ML
None to slight			Quick to slow	None	CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays.
Medium to high			None to very slow	Medium	OL	Organic silts and organic silt-clays of low plasticity.
<p>SILTS AND CLAYS Liquid limit greater than 50</p>		Slight to medium	Slow	Slight	MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts.
		High to very high	None	High	CH	Inorganic clays of high plasticity, fat clays.
		Medium to high	None to very slow	Slight to medium	OH	Organic clays of medium to high plasticity.
HIGHLY ORGANIC SOILS					Pt	Peat and other highly organic soils.

SAT A, Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITE
Soil investigation
Classification

No : 4.307

Date : 20.1.1977

Sig : Pandeyan

**ENGINEERING USE CHART FOR SOILS CLASSIFIED
BY UNIFIED SOIL CLASSIFICATION SYSTEM ***

Description		Important properties			
Typical names of soil groups	Group symbols	Permeability when compacted	Shearing strength when compacted and saturated	Compressibility when compacted and saturated	Workability as a construction material
Well-graded gravels, gravel-sand mixtures, little or no fines	GW	Pervious	Excellent	Negligible	Excellent
Poorly graded gravels, gravel-sand mixtures, little or no fines	GP	Very pervious	Good	Negligible	Good
Silty gravels, poorly graded gravel-sand-silt mixtures	GM	Semipervious to impervious	Good	Negligible	Good
Clayey gravels, poorly graded gravel-sand-clay mixtures	GC	Impervious	Good to fair	Very low	Good
Well-graded sands, gravelly sands, little or no fines	SW	Pervious	Excellent	Negligible	Excellent
Poorly graded sands, gravelly sands, little or no fines	SP	Pervious	Good	Very low	Fair
Silty sands, poorly graded sand-silt mixtures	SM	Semipervious to impervious	Good	Low	Fair
Clayey sands, poorly graded sand-clay mixtures	SC	Impervious	Good to fair	Low	Good
Inorganic silts and very fine sands, rock flour, silty or clayey fine sands with slight plasticity	ML	Semipervious to impervious	Fair	Medium	Fair
Inorganic clays of low to medium plasticity: gravelly, sandy, silty, and lean clays	CL	Impervious	Fair	Medium	Good to fair
Organic silts and organic silt-clays of low plasticity	OL	Semipervious to impervious	Poor	Medium	Fair
Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts	MH	Semipervious to impervious	Fair to poor	High	Poor
Inorganic clays of high plasticity, fat clays	CH	Impervious	Poor	High	Poor
Organic clays of medium to high plasticity	OH	Impervious	Poor	High	Poor
Peat and other highly organic soils	Pt				

* Bureau of Reclamation, 1953.

A T A , Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITE
Soil investigation
Classification

No. : 4.308

Date : 28.12.1976

Sig : *Randau*

Classification of Rocks

Rocks are classified into three major groups, namely, igneous, metamorphic, and sedimentary. The most notable properties of each group are summarized in the following sections:

a) Igneous rocks (granite, diorite, basalt, etc)

Good structural characteristics - hard, dense and durable - good construction material. High bearing capacity - good foundation material. Joints in three dimensions - actual as potential joints are in three sets at approximately right angle to each other.

b) Metamorphic rocks (gneiss, schist, marble, slate, serpentine etc.)

Hard and strong if the rock is not weathered. Jointed, folded, laminated or foliated - metamorphic rocks commonly have two or three sets of joints. The strength of the rocks is greatly influenced by the joints and the folded, laminated or foliated structures.
Containing weak layers between very hard ones.

c) Sedimentary rocks (limestones, sandstones, shales)

Limestones: The strength of limestones varies considerably, from soft calcareous limestones to hard limestones and dolomites. It may vary even within one limestone formation. The strength depends generally upon the texture of the rock. A limestone with porous or cavernous texture has very low compressive strength, and one with dense texture has very high strength.

Sandstones: the strength of sandstones depends largely upon the degree of cementation and the type of cementing material:

<u>Cementing material</u>	<u>Usual color</u>	<u>Strength</u>
Iron oxide	Brown, red, orange	Variable, cement often in irregular bands
Clay	Dull, whitish grey	Low, treacherous when wet
Calcite (CaCO ₃)	Grey, white, buff	Good
Silica (SiO ₂)	White (often stained by iron oxide), buff, yellow, pink	Excellent

A.T.A. Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITE

Soil investigation
Classification

No. : 4.309

Date : 28.12.76



Sig : *Landsar*

The durability is generally in proportion to the strength.

Three sets of joints exist in sandstones. Joints are generally spaced several feet apart.

Shales: The strength of shales varies widely. Soft shales may be scratched by a fingernail or excavated by hand without the use of explosives. Hard shales however, require blasting to excavate.

- Sources: - Wayne C. Teng, Foundation Design
- B.C. PUNMIA, Soil, Mechanics and Foundations
- Deshpande, Vartak, A Treatise on Building Construction

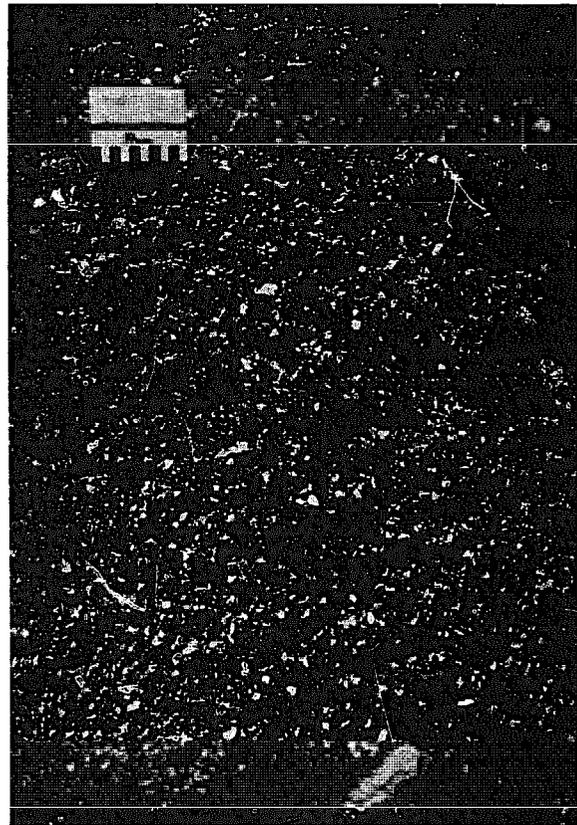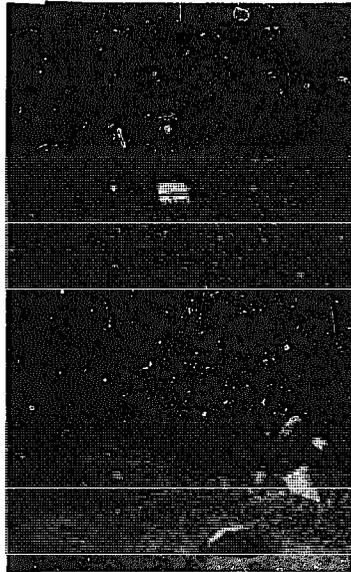

Pikuwa Khola: Sand and Gravel depots on the bank of the Arun river

SURVEY OF BRIDGE SITE

Evaluation of the Survey

No. : 4.401

Date : 28.12.1976

Sig : Pandey

Plotting Work

In the office the plotting work has to be done. It is good to make these work soon after returning from the survey. So, you still remember how the site is looking and to draw the counter-lines is much easier.

The survey should be plotted on tracing paper.

The scale is 1 : 200 (1 cm = 2 m)

The drawing must contain:

- Plan view of the Bridge Site
- Section along the Bridge Axis
- Copy of the 1" = 1 mile map showing the Bridge Location

The plotting is done in the same order as the measurements in the field:

- Main points such as the pegs A, B, C, ...
- Other points along the bridge center line.
- Points up- and downstream from the bridge center line
- Interpolation of contour lines

Interpolation of Contour Lines (in the plan view)


From the tachometric-survey we determine the location and the elevation of points which will be scattered all over the bridge-site. In order to show the form of the bridge-area more clearly, contour lines of 1m-intervals are interpolated between these points.

Analytical Interpolation

1. Connect neighbouring points with lines.
2. Measure the distances (d) along these lines and calculate the differences in elevation (ΔH) between two corresponding points.

e.g. for 98.40 to 102.10
 $d = 4.8\text{cm}$ $\Delta H = 3.70\text{m}$

Sketch:

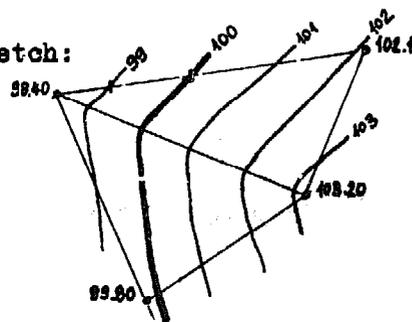

3. Calculate differences in elevation and distances from the lower point to the contour lines between the two points.

e.g. from 98.40 to 99.00 $\Delta L = 0.60\text{m}$ $d = \frac{4.8\text{cm}}{3.70\text{m}} \times 0.60\text{m} = 0.8\text{cm}$

from 98.40 to 100.00 $\Delta L = 1.60\text{m}$ $d = \frac{4.8\text{cm}}{3.70\text{m}} \times 1.60\text{m} = 2.1\text{cm}$... etc.

4. Make these calculations for all the connecting lines, use the slide rule. Mark the so calculated contour line-points on the connecting lines. Draw the contour lines by joining the corresponding points.

A.T.A. - Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITES



No.: 4.402

Interpolation of Contour Lines (II), Graphical Method



Date: 24. 8.1975

Sig.: *[Signature]*

1. Connect neighbouring points with lines (line ①, sketch 1).
2. Draw a perpendicular line to line ① at the higher of the two points (line ②, sketch 1).
Mark on line ② the difference in elevation between the two points.
e.g. for the connecting line 98.40 - 99.80
difference in elevation is $\Delta L = 1.40$ m, mark 1.4 cm
for the connecting line 99.80 - 103.20
difference in elevation is $\Delta L = 3.40$ m, mark 3.4 cm
This gives the revolved points (99.80)', (103.20)' etc....

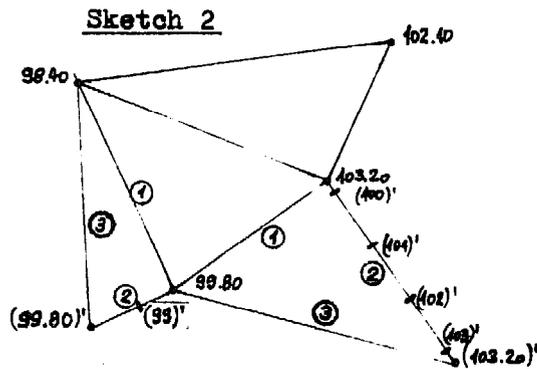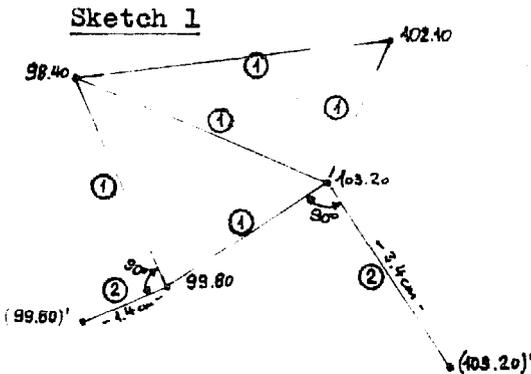

3. Draw line ③ (sketch 2). Lines ② and ③ show the revolved section along line 1.
Mark on line ② the contour line points in elevation (sketch 2).
e.g. for 99.80 - 103.20
contour line 100 is 0.20 m higher \rightarrow 0.2 cm from point 103.20
contour line 101 is 1.20 m higher \rightarrow 1.2 cm from point 103.20
4. Project these contour line points to the base line as shown with line ④ in sketch 3. Make this for all the connectings ①.
5. This projection gives the point of the contour line in plan. The points of the same elevation can then be connected to contour lines (sketch 4).

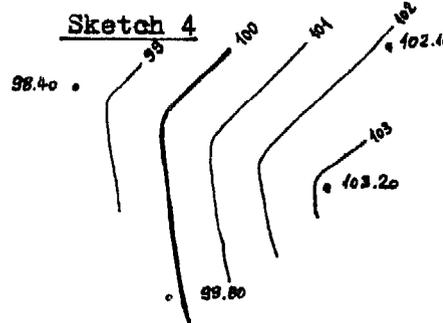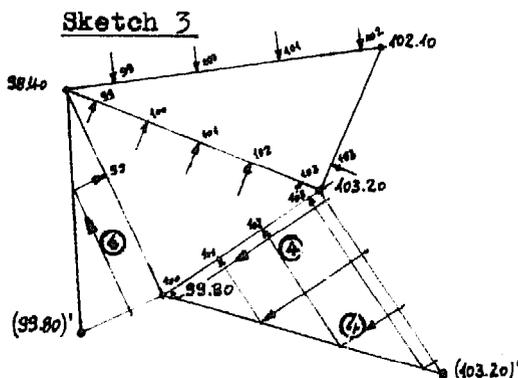

S.A.T.A. Swiss Association for Technical Assistance

SURVEY OF BRIDGE SITE



No. : 4.403

Evaluation of the Survey

Date : 28.12.1976

Sig : *Landman*

SAT A, Swiss Association for Technical Assistance

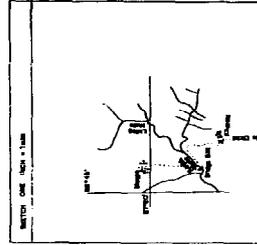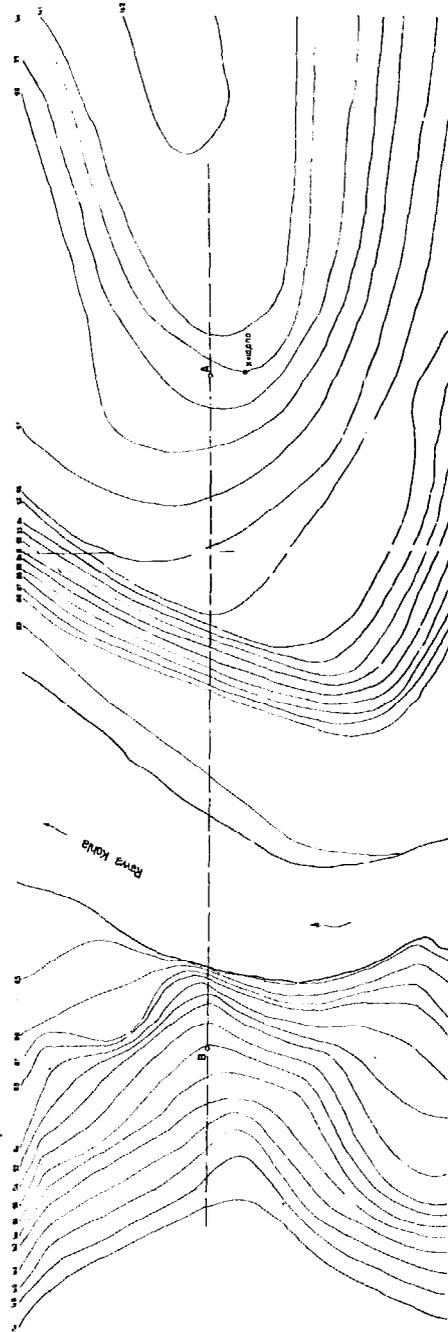


Right bank

Plan

Left bank

Side elevation

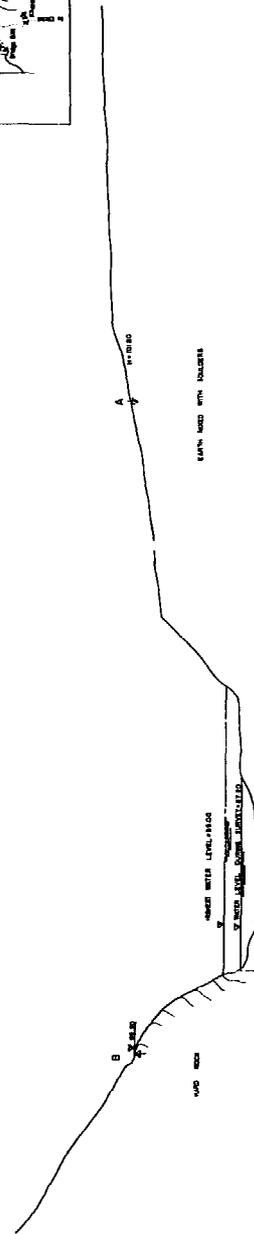



5. CONSTRUCTION MATERIAL

CONSTRUCTION MATERIAL

No.: 5.102


Steel cables,

Unreeling the cables


Date: 6.7.75

Sig.: *[Signature]*

Cables should be unreeled in a manner that prevents small loops from forming. De not attempt to unreel or uncoil cables from stationary coil or reel, as this will cause kinking (forming of loops)

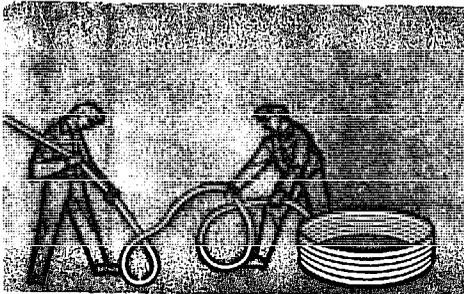


Wrong method

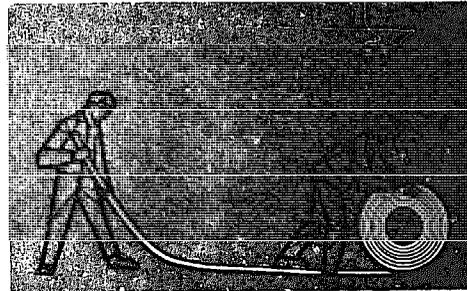


Correct method

The most satisfactory method of unreeling cables is to mount the reel on a pipe or rod supported by two uprights.

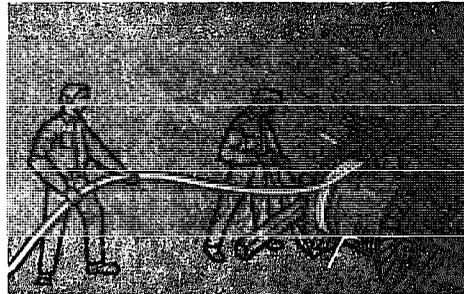


Correct method

Reeling cables from one reel to another

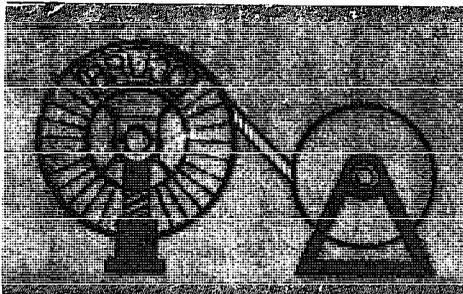

Wrong method

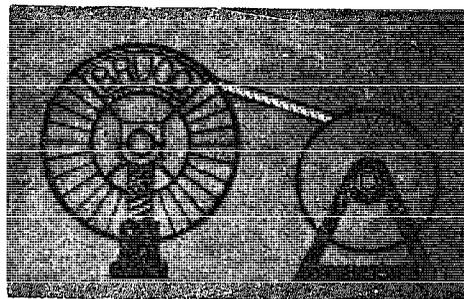

Correct method

CONSTRUCTION MATERIAL

Steel cables

cables from India

No. : 5.103

Date : 2.1.77

Sig : R. P. Oli


All metallic steel cables or strands are used for suspension bridges. The Indian Standard gives the following specifications:

IS 2266 - 1970

Specifications for steel wire ropes for general purposes.

Table 1 : 6x19 (12/6/1) with W.S.C. (wire strand core).

Tensile strength of wire 160 kg/mm²

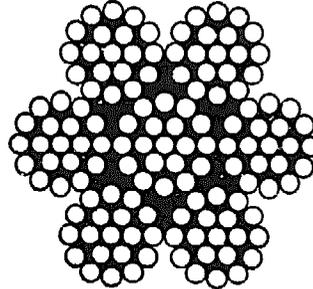

Cable diameter		sectional area mm ²	Min. breaking load, tons	Weight per m kg
inches	mm			
½"	13	56.07	8.79	0.64
1"	26	224.37	35.90	2.57
1¼"	32	340.00	54.40	3.90
1½"	38	481.00	77.00	5.53

IS 1835 - 1972

Specifications for steel wire ropes (2nd revision)

IS 2363 - 1965


Glossary of terms relating to wire ropes

IS 3973 - 1967

Code of practice for selection, installation and maintenance of wire ropes

Cable cutting

After welding the single strands on both sides of the cutting point, the steel cable is separated by the cutting-torch.

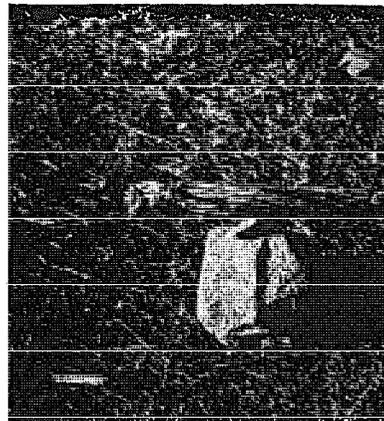

CONSTRUCTION MATERIAL


Steel cables

cables from Japan


No. : 5.104

Date : 2.1.77

Sig : *P. S. ...*



6x7 with W.S.C. (Wire Strand Core) steel core construction for suspension bridges, galvanized, regular lay-right hand, tensile strength of the wire 170 - 185 kg/mm²

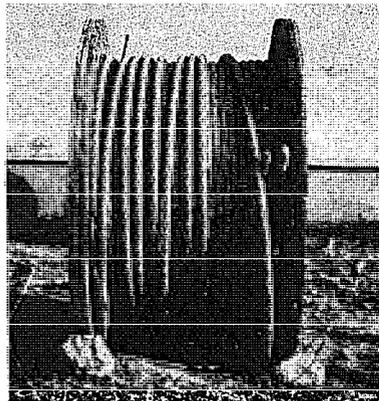

Right hand-regular lay (Z)



Cable-drum in Amlekhganj

Cable diameter		Wire diameter	Min. breaking load, tons	Weight per m
inches	mm	mm		kg
½"	12.5	1.40	11.3	0.61
1"	25.0	2.80	45.3	2.46
1¼"	32.0	3.55	71.0	4.02
1½"	38.0	4.18	102.0	5.51

The construction of this cable is again hexagonal, similar to the 6x19 W.S.C. according to Indian Standard. All cables constructed with less wires like 6x7 W.S.C. are less flexible but more economical due to higher breaking load and lower price.

CONSTRUCTION MATERIAL

Steel cables

Used ropeway cables

No. : 2.105

Date : 2.1.77

Sig : R. Prati

The Kathmandu-Metauda Ropeway is continuously replacing steel cables. The used ropeway cables are available and are an excellent and economic material to build suspension and suspended bridges, but always anchored on drums. Orders for such cables can be placed to

Ropeway Company
Teku Station
Kathmandu

1 1/4" Spiral Construction, used ropeway track cable, ungalvanized.

37 wires with 4.6 mm dia

weight per metre 5 kg

Design breaking strength: 70 tons



Minimum bending diameter for fixing not less than 0.80 m. End fixing with drum anchorage according to the standard drawings.

drum anchorage
(refer to
standard drawing)




3/4" Fibre Core Construction, used ropeway haulage cable, ungalvanized.

6 strands with 7 wires each and fibre core


weight per metre 1.3 kg

Design breaking strength: 12 tons



6x7 (6/1)

For end fixing the use of ordinary thimbles and 5 bulldog grips is recommended.

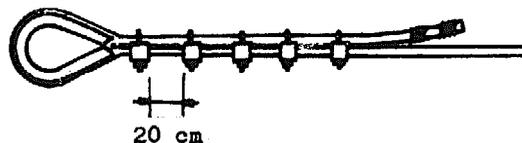

CONSTRUCTION MATERIAL

Steel cables

wires

No. : 5.106

Date : 25.2.77


Sig : R. P. S. Li

Equivalent to cable W.S.C. 6x19(12/6/1)	Bridge Wire (Ø 5 mm) Requirement for equivalent strength, breaking strength 160 Kg/mm ² . Allowable strength 72 Kg/mm ² (German Standard). Area 19.6 mm ² . Weight per wire 0.154 Kg/m		
Ø inch	Area (mm ²)	No. of Wires required	Weight of Wires (kg./m)
1/2"	40	2	0.31
1"	158	8	1.23
1 1/4"	251	13	2.00
1 1/2"	357	18	2.77

WEDGE AND CONE ANCHORAGE

The size of this anchorage system is manufactured for 1 wire or 7 wires

Open system

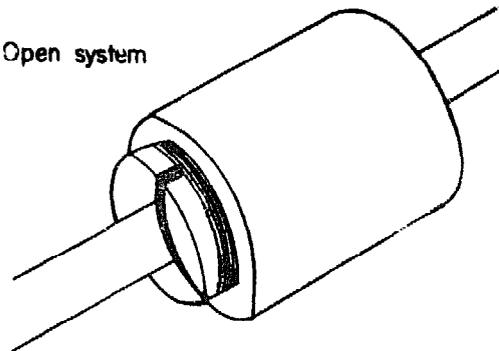


Closed system



Closed (coupling)
connecting system

(connection of 2 wires)

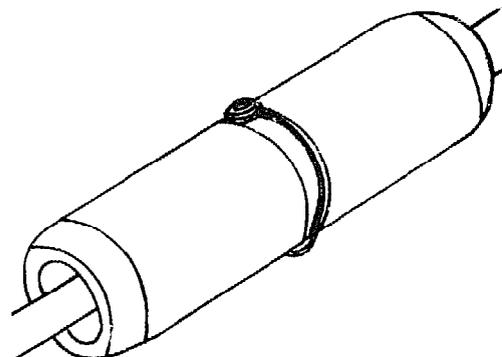

S.A.T.A., Swiss Association for Technical Assistance

CONSTRUCTION MATERIAL

No. : 5.201

Cable fittings


Thimbles

Date : 2.1.77

Sig : R. Phari

OPEN TYPE THIMBLES IS : 2315 - 1963

All dimensions in millimetres.

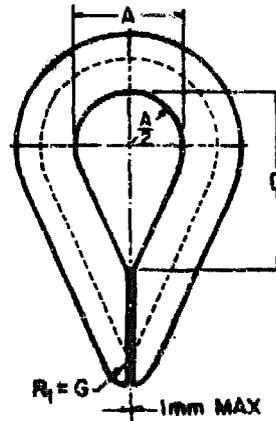

Nominal size of rope	A	C	D	F	G	K	r ₁	R	Weight p.pc. (kg)
8	27	13	45	9	5	7	4.5	6.5	0.040
10	30	15	50	11	7	8	5.5	7.5	0.061
12	35	17	58	13	8	11	6.5	8.5	0.077
14	41	19	68	15	9	12	7.5	9.5	0.125
16	46	22	77	17	10	13	8.5	11.0	0.190
18	52	25	86	19	11	15	9.5	12.5	0.290
20	57	27	95	22	12	16	10.5	13.5	0.330
22	64	31	106	24	14	18	12.0	15.5	0.500
24	73	36	122	26	16	21	13.5	18.0	0.600
25	73	36	122	27	16	21	13.5	18.0	0.710
29	82	39	135	31	17	23	15.0	19.5	1.200
32	92	43	152	34	19	26	17.0	21.5	1.500
35	98	46	162	38	21	28	18.0	23.0	1.750
38	110	52	185	41	23	32	20.5	26.0	2.100

S A T A . Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

CONSTRUCTION MATERIAL


Cable fittings

Cable end fixed with bulldog grips and thimbles


No. : 5.202

Date : 13.7.75


Sig : *[Signature]*

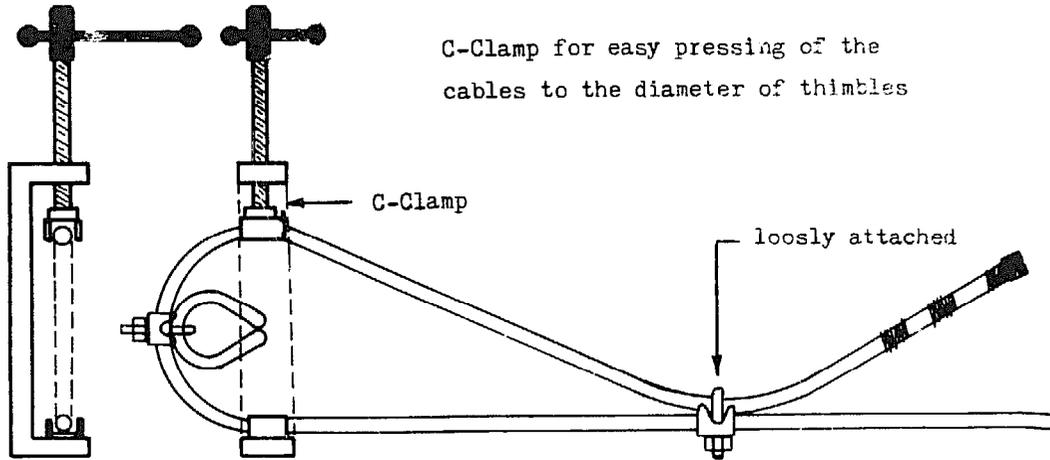


C-Clamp for easy pressing of the cables to the diameter of thimbles

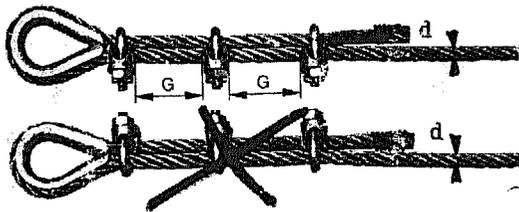

Gap (G) = 5-6 d

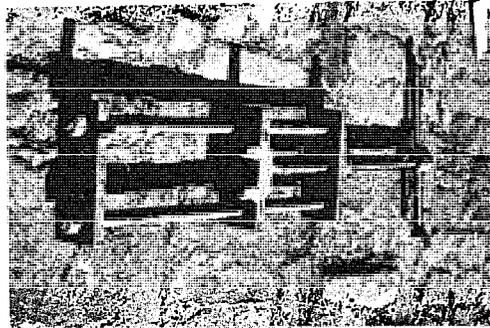

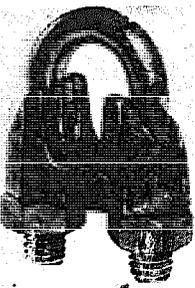Specification for bulldog grips IS:2361-1970	G _{gap} mm	Cable mm	Diameter inches	No. of grips minimum	Weight * Kg./Pc.
	35	2 - 3.5	1/8	3	0.011
		4 - 5	3/16	3	0.015
		5.5 - 6.5	1/4	3	0.018
55	55	7 - 8	5/16	3	0.052
		8.5 - 9.5	3/8	3	0.065
		10 - 11	7/16	3	0.070
85	85	12 - 13	1/2	3	0.130
		14 - 15	9/16	3	0.140
		16 - 17	5/8	5	0.200
130	130	18 - 19	3/4	5	0.250
		20 - 23	7/8	5	0.400
		24 - 26	1	5	0.480
200	200	27 - 30	1 1/8	5	0.640
		31 - 33	1 1/4	7	0.790
		34 - 40	1 1/2	7	0.950

* according to Kabelwerke Brugg Ltd. Switzerland

Very important:

After completion of the bridge construction, all bulldog grips must be tightened once again.

SAT A, Swiss Association for Technical Assistance

CONSTRUCTION MATERIAL

No : 5.202

Cable fitting

Cable end fixed by drum and clamp

Date : 16th March 77

Sig : *[Signature]*

It is very difficult to get the cable anchored by socket end, especially at the spot. The cable sockets would have to be placed very correct or, the required hoisting sags could not be applied. Therefore, a high skill and accurate execution are necessary.

Beside of the execution work, there are other reasons why the socket end fixed cable ends are developing difficulties. The fixation of cable ends by using the standardized drum anchorage does not include any problem. Recent experience has shown and proved, that the drum anchored cables can be suspended to the right sags surprisingly easy and quick.

The system of the drum anchorage has, however, the advantage that either spiral cable - e.g. used rope way cable - or steel wire cable - e.g. 6 x 19 (12/6/1) - can be fixed and safely anchored. It is important to point out, that the drum anchorage can be used for any kind of cable - even the parallel bridge wire cluster (single wire) - and, the needed steel is only about 1/5 of the normal anchor rod system.

The following example indicates how the drum cable anchorage might be calculated :

Given : 2 cables of $\phi 1 \frac{1}{2}$ " (38 mm)

max. Total Tension = 53.16 tons (from the statical calculation)

Cable end anchorad by drum and cable end clamp with eight bolts M 24 mm

Factor of static friction steel on steel = 0.15

To be calculated : How many times the cable must be wropped on ?


What is the capacity of the cable end clamp (cable clip)

S T E P :

Single cable force :

$$53.16 : 2 = 26.58 \text{ t}$$


Filled with concrete

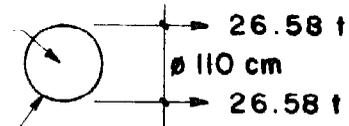

Steel sheet about 2 mm

If on both sides of the drum the same force will be anchorad, the Torsion Moments will be neglected.

The sheave pulley is the basic system to anchor the force by utilizing the static friction cable on steel sheet of the drum.

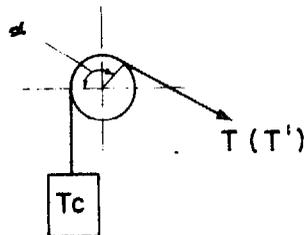

Cable friction :

$$\text{Friction } T_F = (e^{\mu\alpha} - 1) \cdot T_c$$

Forces :

$$\text{Upwards } T = e^{\mu} \cdot T_c$$

$$\text{Downwards } T' = \frac{T_c}{e^{\mu\alpha}} = T_c \cdot \frac{1}{e^{\mu\alpha}}$$

α = radian measure

$$\mu = \frac{\text{Static friction steel on steel}}{1.5 \text{ (Safety factor)}} = 0.10$$

$$e = 2.71828183...$$

CONSTRUCTION MATERIAL

No : 5.204

Cable fitting

Cable end fixed by
drum and clamp (II)

Date : 16th March 77

Sig : *J. P. H. H.*

$$\alpha \text{ radian} = \frac{\alpha^\circ \times \pi}{180^\circ}$$

$$\mu = \frac{0.15}{1.5} = 0.10$$

$$\pi = 3.14159654 \dots$$

Angle (degree)	0°	90°	180°	360°	540°	720°	900°	1080°
Radian measure	0	$\frac{\pi}{2}$	π	2π	3π	4π	5π	6π
$e^{\mu\alpha}$	1	1.170	1.369	1.874	2.566	3.514	4.810	6.586
$\frac{1}{e^{\mu\alpha}}$	1	0.855	0.730	0.533	0.390	0.285	0.207	0.152

$$\alpha = 3 \cdot 360^\circ = 1080^\circ \hat{=} 6\pi$$

$$T_c = \text{Cable force} = 26.58 \text{ tons}$$

T_c = Remaining force (to be kept as downwards by the cable clip)

$$T' = T_c \cdot \frac{1}{e^{\mu\alpha}} = T_c \cdot 0.152 = 26.58 \cdot 0.152 = 4.04 \text{ tons}$$

Control as upwards force (cable force)


$$T_c = T' \cdot e^{\mu\alpha} = 4.04 \cdot 6.586 = 26.6 \hat{=} 26.58 \text{ tons}$$

The calculation above shows that after turning the cable three times round the drum 4.04 tons are only left - i. e. the cable drum will take due to friction cable on steel = 26.58 - 4.04 = 22.54 tons. Total anchore force kept by the drum will be 2 x 22.54 = 45.08 tons.

2. S T E P :


The remaining 4.04 tons on each cable must be anchored now with the cable clip (cable end clamp)

Total 8 nuts M24 (allowable tension force 3.14 tons)



Cable clip (cable end clamp)

System:



$$\text{Action } 8 \cdot 3.14 \text{ tons} = 25.12 \text{ tons}$$

$$\text{Reaction } 8 \cdot 3.14 \text{ tons} = 25.12 \text{ tons}$$

Total force which can kept:

$$T' > F_T = \frac{\text{Number of bolts} \cdot \text{tension allow} \cdot 2 \cdot \mu (\text{static friction})}{1.5}$$

$$T' > F_T = \frac{8 \cdot 3.14 \cdot 2 \cdot 0.15}{1.5} = 5.024 > 4.04$$

SAFETY FACTOR :

$$\frac{T' \cdot e^{\mu\alpha}}{\text{cable force}} = \frac{5.024 \cdot 6.586}{26.58} = 1.24$$

The safety against bond failure is greater than just by calculation, because the drum and the cables will be encased in concrete. At the discharge point the cable will be safed against corrosion with a joint sealer application (see 5.205 ff).

CONSTRUCTION MATERIAL

No. : 5.205

Cable fittings

joint sealer

Date : 2.1.77

Sig : R. Jeli

Everytime when main cables are fixed by drum-anchorages and the final concrete work is finished, there is a joint between the main cables and the concrete. In such cases it is useful to apply (as it is shown on page 5.206) an elastic joint sealer to prevent rust in these sections.

Thanatar

is a black, elastic fuel-resistant sealant for horizontal joints. It is delivered in two components which, when mixed in the required proportions, combine to an elastomeric compound which is applied cold.

Mixing proportions

THANATAR is supplied in two components which must be mixed thoroughly: 10 parts by weight of component A and one part by weight of component B.

Condition of joints

Preparation The cable in this part must be thoroughly dry and free of dust, oil and grease.

Cross-section The thickness should be \sim 10 mm.

Application

Priming Apply THANA-PRIMER on dry cables and ensure complete coverage. THANA-PRIMER will be dry after 3 hours.

Mixing Stir well component A, then add component B to component A and mix thoroughly during appr. 3 minutes with a spatula until the mixture is homogeneous. During cold weather, component A can be warmed in a water bath up to 20°C.

Pot life Appr. $\frac{1}{2}$ hour for a 2 kg mixture. Larger quantities should be mixed only if they can be applied within 20 minutes as the pot life diminishes as the quantity mixed increases.

Curing

At normal temperatures (appr. 20°C), THANATAR will not stick any more after 4 to 6 hours and will be completely hardened after appr. 24 hours.

PRECAUTIONS

Fully hardened THANATAR is not soluble and can almost not be removed mechanically. Clean tools immediatly after use! THANATAR IS INFLAMMABLE! Keep it away from fire!

THANATAR stands for an example. Each other product in this manner is applicable.
(Meynadier Ltd. Vulkanstr. 110 8048 Zurich, Switzerland)

CONSTRUCTION MATERIAL

Cable fittings

Joint sealer


No. : 100

Date : 2.1.97


Sig : R. Ghel

APPLICATION OF THE JOINT SEALER


FOR 2 MAIN CABLES (39-60 m Span)

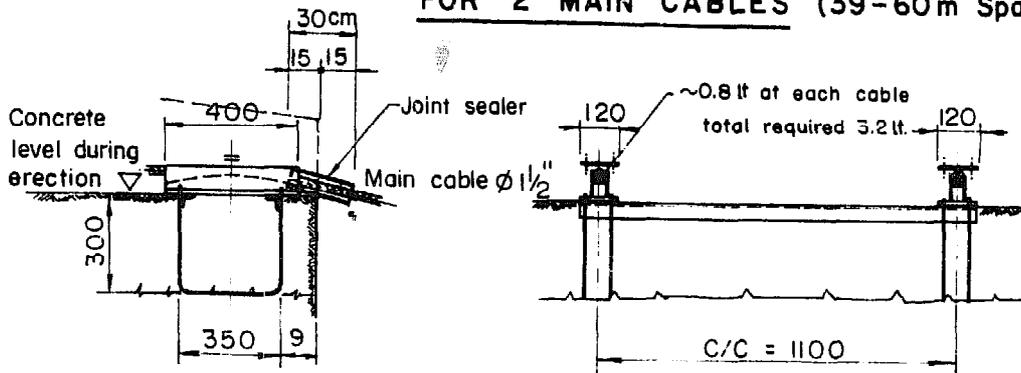

FOR 4 MAIN CABLES (63-87 m Span)

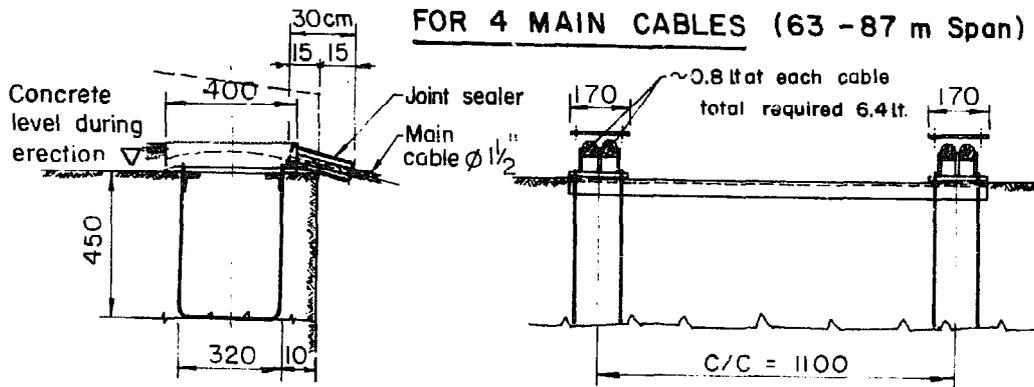

FOR 6 MAIN CABLES (87-126 m Span)

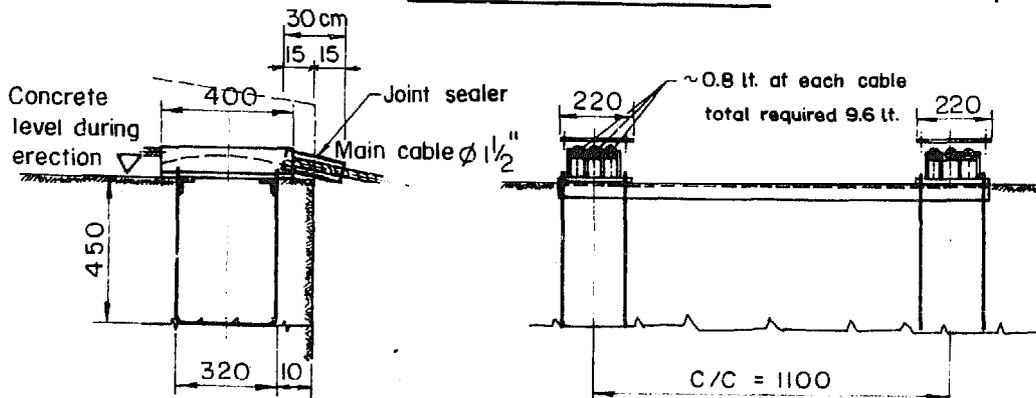

SAT A . Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

CONSTRUCTION MATERIAL

Steel

Equal angles


No : 5.301

Date : 2.1.77

Sig : *R. A. K.*

ROLLED STEEL EQUAL ANGLES

DIMENSIONS AND PROPERTIES

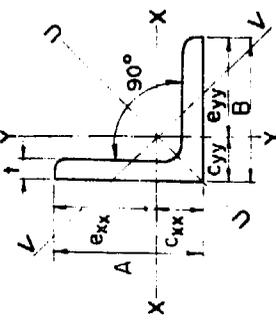

Designation	Size A x B mm. mm.	Weight per Meter W kg.	Sec- tional Area a cm ²	Thick- ness t mm.	Centre of Gravity Cx, Cx', Cy, Cy' cm.	Distance of Extreme ex, ey cm.	Moments of Inertia			Radii of Gyration			Modulus of Section Z _{xx} = Z _{yy} cm ³
							I _{xx} = I _{yy} cm ⁴	I _{uu} cm ⁴	I _{vv} cm ⁴	r _{xx} = r _{yy} cm.	r _{uu} cm.	r _{vv} cm.	
ISA 2020	20x20	0.9	1.12	3.0	0.59	1.41	0.4	0.6	0.2	0.58	0.73	0.37	0.3
ISA 5050	50x50	3.8	4.79	5.0	1.41	3.59	11.0	17.6	4.5	1.52	1.92	0.97	3.1
ISA 6565	65x65	4.5	5.68	6.0	1.45	3.55	12.9	20.6	5.3	1.51	1.90	0.96	3.6
ISA 6565F	65x65	4.9	6.25	5.0	1.77	4.73	24.7	39.4	9.9	1.99	2.51	1.26	5.2
ISA 8080	80x80	5.8	7.44	6.0	1.81	4.69	29.1	46.5	11.7	1.98	2.50	1.26	6.2
ISA 100100	100x100	9.6	12.21	8.0	2.27	5.73	72.5	115.6	29.4	2.44	3.08	1.55	12.6
ISA 100100	100x100	11.8	15.05	10.0	2.34	5.66	87.7	139.5	36.0	2.41	3.04	1.55	15.5
ISA 110110	110x110	12.1	15.39	8.0	2.76	7.24	145.1	231.8	58.4	3.07	3.88	1.95	20.0
ISA 110110	110x110	14.9	19.03	10.0	2.84	7.16	177.0	282.2	71.8	3.05	3.85	1.94	24.7
ISA 130130	130x130	17.7	22.59	12.0	2.92	7.08	207.0	329.3	84.7	3.03	3.82	1.94	29.2
ISA 130130	130x130	16.5	21.06	10.0	3.08	7.92	238.4	380.5	96.3	3.36	4.25	2.14	30.1
ISA 150150	150x150	19.6	25.02	12.0	3.16	7.84	279.6	445.3	113.8	3.34	4.22	2.13	35.7
ISA 150150	150x150	19.7	25.06	10.0	3.58	9.42	402.7	643.4	162.1	4.01	5.07	2.54	42.7
ISA 150150	150x150	23.4	29.82	12.0	3.66	9.34	473.8	755.9	191.8	3.99	5.03	2.54	50.7
ISA 150150	150x150	22.8	29.03	10.0	4.06	10.94	622.4	995.4	249.4	4.63	5.86	2.93	56.9
ISA 150150	150x150	27.2	34.59	12.0	4.14	10.86	735.4	1174.8	296.0	4.61	5.83	2.93	67.7

CONSTRUCTION MATERIAL

Steel

Channels


No : 5.302

Date : 2.1.77

Sig : R. G. S.

ROLLED STEEL CHANNELS

DIMENSIONS AND PROPERTIES

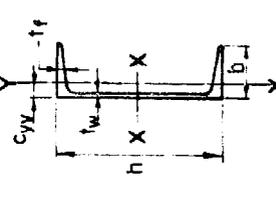

Designation	Weight per Meter w kg	Sectional area a cm ²	Depth of Section h mm	Width of Flange b mm	Thickness of Flange t _f mm	Thickness of Web t _w mm	Centre of Gravity C _{yy} cm	Moments of Inertia		Radii of Gyration		Moduli of Section	
								I _{xx} cm ⁴	I _{yy} cm ⁴	r _{xx} cm	r _{yy} cm	Z _{xx} cm ³	Z _{yy} cm ³
ISLC 75	5.7	7.26	75	40	6.0	3.7	1.35	66.1	11.5	3.02	1.26	17.6	4.3
ISLC 100	7.9	10.32	100	50	6.4	4.0	1.62	164.7	24.8	4.06	1.57	32.9	7.3
ISLC 125	10.7	13.67	125	65	6.6	4.4	2.04	356.8	57.2	5.11	2.05	57.1	12.8
ISLC 150	14.4	18.36	150	75	7.8	4.8	2.38	697.2	103.2	6.16	2.37	93.0	20.2
ISLC 175	17.6	22.40	175	75	9.5	5.1	2.40	1148.4	126.5	7.16	2.38	131.3	24.8
ISLC 200	20.6	26.22	200	75	10.8	5.5	2.35	1725.5	146.9	8.11	2.37	172.6	28.5
ISMC 75	6.8	8.67	75	40	7.3	4.4	1.31	76.0	12.6	2.96	1.21	20.3	4.7
ISMC 100	9.2	11.70	100	50	7.5	4.7	1.53	186.7	25.9	4.00	1.49	37.3	7.5
ISMC 125	12.7	16.19	125	65	8.1	5.0	1.94	416.4	59.9	5.07	1.92	66.6	13.1
ISMC 150	16.4	20.88	150	75	9.0	5.4	2.22	779.4	102.3	6.11	2.21	103.9	19.4
ISMC 175	19.1	24.38	175	75	10.2	5.7	2.20	1223.3	121.0	7.08	2.23	139.8	22.8
ISMC 200	22.1	28.21	200	75	11.4	6.1	2.17	1819.3	140.4	8.03	2.23	181.9	26.3

CONSTRUCTION MATERIAL

No. : 10/200


Steel

rounds

Date : 10.1.97


Sig : R Ghosh

ROUNDS: Dimensions and properties



Diameter d mm	Weight w kg	Sectional Area a cm ²	Moduli of Section Z _{xx} = Z _{yy} cm ³
6	0.222	0.283	0.021
8	0.395	0.502	0.050
10	0.617	0.785	0.098
13	1.042	1.337	0.216
16	1.578	2.011	0.402
20	2.466	3.142	0.785
25	3.853	4.719	1.534
32	6.313	8.042	3.217
38	8.903	11.340	5.357
42	10.876	13.850	7.274

Rectangular Bars: Dimensions and properties



Designation	Weight w kg	Sectional Area a cm ²	Moduli of Section Z _{xx} cm ³	Z _{yy} cm ³
32/20	5.024	6.40	3.41	2.13
32/20	8.000	10.24	5.46	5.46

Flats and Plates

Weights

Flat						Plate							
Designation	Weight kg	Designation	Weight kg	Designation	Weight kg	Thickness mm	Weight kg	Thickness mm	Weight kg	Thickness mm	Weight kg	Thickness mm	Weight kg
6/38	1.790	8/360	22.608	10/480	14.130	2	15.70	8	62.80	16	125.60	25	196.25
6/65	3.062	9/38	2.685	10/290	22.765	5	39.25	10	78.50	20	157.00	28	219.80
8/180	11.305	9/65	4.592	10/360	28.260	6	47.10	12	94.20	22	172.70	32	251.20

S.A.T.A., Swiss Association for Technical Assistance

CONSTRUCTION MATERIAL

Steel

Ribbed Torsteel for
concrete reinforcement

No. : 1.335

Date : 1.1.77

Sig : R. Q. J. E.

RIBBED-TORSTEEL

HIGH BOND HIGH STRENGTH
STEEL FOR
CONCRETE REINFORCEMENT



RIBBED-TORSTEEL fully conforms to the best known international standards and Codes of Practices of reinforced concrete including :
Indian Standard: IS 1786-1966: Indian Code of Practice IS 456-1964: British Standard B.S. 1144 and B.S.4461 (metric) : British Code of Practice C.P. 114: French Standards B.A. 1968: German Standards DIN 1045 :

PERMISSIBLE STRESS:		
Tension Reinf.	$\phi < 20\text{mm}$	2300kg/cm ² (33,000 psi)
	$\phi > 20\text{mm}$	2100kg/cm ² (30,000psi)
Shear Reinf.		1750kg/cm ² (25,000psi)
Compression Reinf.		1750kg/cm ² (25,000psi)
Bond		50% more than Plain Bar

USEFUL DATA OF STANDARD SIZES		
Size (mm)	Area (cm ²)	Wt. kg/metre
8	0.50	0.4
10	0.78	0.6
12	1.13	0.9
16	2.01	1.6
20	3.14	2.5

ϕ mm	Wt kg/m	Area per bar cm ²	No. of bars per m length of the concrete construction (cm ² /m)			
			3 $\frac{1}{3}$	4	5	6 $\frac{2}{3}$
			Distance between the bars			
			30 cm	25 cm	20 cm	15 cm
8	0.395	0.503	1.68 cm ²	2.01 cm ²	2.51 cm ²	3.35 cm ²
10	0.617	0.785	2.62 cm ²	3.14 cm ²	3.93 cm ²	5.23 cm ²
12	0.888	1.130	3.77 cm ²	4.52 cm ²	5.65 cm ²	7.54 cm ²
16	1.580	2.010	6.70 cm ²	8.04 cm ²	10.10 cm ²	13.40 cm ²
20	2.470	3.140	10.50 cm ²	12.60 cm ²	15.70 cm ²	20.90 cm ²
ϕ	Wt kg/m	Area per bar cm ²	Area per m width of the concrete structure			

Licensed Producer in Nepal:

HIMAL IRON & STEEL (P) LTD.

Regd. Office: 'JYOTI BHAWAN' KANTIPATH
KATHMANDU, NEPAL

Telephone: 11490/14902. Cable: HIMALIRON
Factory: PARWANIPUR, NEPAL

HMG Nepal

Roads Department

Suspension Bridge Division

CONSTRUCTION MATERIAL

Concrete

recommended mixes

No. : 5.401

Date : 24.2.77

Sig : R. Prali

RECOMMENDED MIXES FOR VARIOUS TYPES OF CONSTRUCTION

Depends on whether concrete is to be tamped, rodded or vibrated and on absorption of water by aggregate.

Nature of Work	Mixture Recommended Vol. Proport.	Maximum Size of Aggregate to use	Water in gallons per bag of C.	Best Consistency
Long span reinforced concrete arches, high load reinforced concrete columns	1:1:2	$\frac{1}{2}$ " to $\frac{3}{4}$ "	3.5 to 4.0	Medium
Heavily stressed members of structures, small precast work such as Posts and Poles for Fencing, Telegraphs, Signals, Garden, furniture and decoratives and other work of very thin sections, watertight constructions for high heads, long piles.	1:2:2	$\frac{1}{2}$ " to $\frac{3}{4}$ "	4.5 to 5.0	Medium or Soft.
R.C. Columns and members subjected to medium loads, wall and floors of reservoir and tanks, cisterns, sewers, well kerbs and platforms and other watertight constructions for moderate heads nonsurfaced roof slabs, concrete deposited under water.	1:3:2 or 1.2:2:4	$\frac{3}{4}$ "	5.5	Medium
General R.C. Building work subjected to ordinary stresses such as beams, slabs, columns, panel walls basement and retaining, walls, stairs, lintels, sills, roads, pavements, driveways, side walls, floors, steps, bunkers, silos, bridge construction, dams and pier etc. exposed to action of water and rust, machine foundations subjected to vibrations, R.C. footings, R.C. piles.	1:2:4	$\frac{1}{2}$ " to $1\frac{1}{2}$ " as required	6.0 to $6\frac{1}{2}$	Stiff for Roads Medium for others.
Mass concrete work in culverts, retaining walls, compound walls and ordinary machine bases, foundation, walls which need not be water-tight.	1:3:5 1:3:6 + 40% boulders	1" to 2"	7.5	Stiff or Medium
Mass concrete for heavy walls, foundations under column footings and under heavy duty floors, concrete blocks, hollow block construction ($\frac{1}{2}$ " AGG).	1:4:8 (or 1:3:6 + 40% boulder)	$1\frac{1}{2}$ " to $2\frac{1}{2}$ "	10.0 to 10.5	Medium

SAT A . Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

CONSTRUCTION MATERIAL

Timber

Safe permissible stresses
round column
planks

No : 5.501

Date : 26.2.77

Sig : R. G. P.


The two important Nepali - timbers are SAL (Shorea robusta) and DEBDARU well known as SALLA.

SAFE PERMISSIBLE STRESSES IS: 883 - 1966

Trade name	Average weight kg/m ³	Modulus of elasticity t/cm ²	Bending and tension along grain kg/cm ²	Shear		Compression	
				horizontal kg/cm ²	along grain kg/cm ²	parallel to grain kg/cm ²	perpendicular to grain kg/cm ²
SALLA	515	92	70	7	10	50	10
SAL	865	127	112	9	13	78	29

Example for timber design :

1. Design of a round column



P = 700 kg
h = 4.00m

A = Area of section, cm²

l_B = length of buckling

r = radius of gyration

l_a = $\frac{l_B}{r}$ = slenderness ratio

approximate formula for round timbers: $A = (12 \cdot P) + (8 \cdot l_B^2)$

P in tons, l_B in m

$$A = 12 \cdot 7 + 8 \cdot 4^2 = 212 \text{ cm}^2$$

$$\phi \text{ 18cm with } A = 254 \text{ cm}^2$$

$$r = \frac{d}{4} = 4.5 \text{ cm}$$

$$l_a = \frac{400}{4.5} = 88.8 \approx 89$$


$$w = 2.54 \text{ (according to DIN 1052) } f = \frac{w \cdot P}{A} = \frac{2.54 \cdot 7000}{254} = 70 \text{ kg/cm}^2 < 78$$

on page 5.502

permissible compression parallel to grain for SAL timber

$$= 78 \text{ kg/cm}^2$$

2. Design for planks (beam)

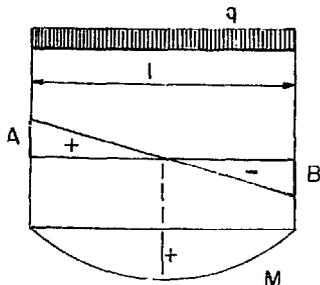

q = 300 kg/m

z = Section modulus

l = 2.0 m

$$A = B = 300 \text{ kg} = \frac{q \cdot l}{2}$$

$$z_{min} = \frac{M_{max}}{f_{max}}$$

$$M_{max} = \frac{q \cdot l^2}{8} = 150 \text{ mkg}$$

$$z_{min} = \frac{15000}{112} = 134 \text{ cm}^3$$

Section : 6/23

$$z = \frac{23 \cdot 6^2}{6} = 138 \text{ cm}^3$$

$$\text{Bending : } f = \frac{15000}{138} = 109 \text{ kg/cm}^2 < 112 \text{ kg/cm}^2$$

$$\text{Shear : } f = \frac{3 \cdot 300}{2 \cdot 138} = 3.26 \text{ kg/cm}^2 < 13 \text{ kg/cm}^2$$

(for rectangular sections only; Q = Max. shearing force, A = Area of section)

CONSTRUCTION MATERIAL

No. : 5.502

Buckling – numbers

Date : 26.2.77

Timber

for wooden buildings.

Sig. : R Goli


BUCKLING-NUMBERS FOR WOODEN BUILDINGS (according to DIN 1052)

l_a	0	1	2	3	4	5	6	7	8	9	l_a
0	1.00	1.00	1.01	1.01	1.02	1.02	1.02	1.03	1.03	1.04	0
10	1.04	1.04	1.05	1.05	1.06	1.06	1.06	1.07	1.07	1.08	10
20	1.08	1.09	1.09	1.10	1.11	1.11	1.12	1.13	1.13	1.14	20
30	1.15	1.16	1.17	1.18	1.19	1.20	1.21	1.22	1.24	1.25	30
40	1.26	1.27	1.29	1.30	1.32	1.33	1.35	1.36	1.38	1.40	40
50	1.42	1.44	1.46	1.48	1.50	1.52	1.54	1.56	1.58	1.60	50
60	1.62	1.64	1.67	1.69	1.72	1.74	1.77	1.80	1.82	1.85	60
70	1.88	1.91	1.94	1.97	2.00	2.03	2.06	2.10	2.13	2.16	70
80	2.20	2.23	2.27	2.31	2.35	2.38	2.42	2.46	2.50	2.54	80
90	2.58	2.62	2.66	2.70	2.74	2.78	2.82	2.87	2.91	2.95	90
100	3.00	3.06	3.12	3.18	3.24	3.31	3.37	3.44	3.50	3.57	100
110	3.63	3.70	3.76	3.83	3.90	3.97	4.04	4.11	4.18	4.25	110
120	4.32	4.39	4.46	4.54	4.61	4.68	4.76	4.84	4.92	4.99	120
130	5.07	5.15	5.23	5.31	5.39	5.47	5.55	5.63	5.71	5.80	130
140	5.88	5.96	6.05	6.13	6.22	6.31	6.39	6.48	6.57	6.66	140
150	6.75	6.84	6.93	7.02	7.11	7.21	7.30	7.39	7.49	7.58	150
160	7.68	7.78	7.87	7.97	8.07	8.17	8.27	8.37	8.47	8.57	160
170	8.67	8.77	8.88	8.98	9.08	9.19	9.29	9.40	9.51	9.61	170
180	9.72	9.83	9.94	10.05	10.16	10.27	10.38	10.49	10.60	10.72	180
190	10.83	10.94	11.06	11.17	11.29	11.41	11.52	11.64	11.76	11.88	190
200	12.00	12.12	12.24	12.36	12.48	12.61	12.73	12.85	12.98	13.10	200
210	13.23	13.36	13.48	13.61	13.74	13.87	14.00	14.13	14.26	14.39	210
220	14.52	14.65	14.79	14.92	15.05	15.19	15.32	15.46	15.60	15.73	220
230	15.87	16.01	16.15	16.29	16.43	16.57	16.71	16.85	16.99	17.14	230
240	17.28	17.42	17.57	17.71	17.86	18.01	18.15	18.30	18.45	18.60	240
250	18.75	—	—	—	—	—	—	—	—	—	250

l_a = slenderness ratio
 l_B = length of buckling
 r = radius of gyration

$$l_a = \frac{l_B}{r}$$

SAT A , Swiss Association for Technical Assistance

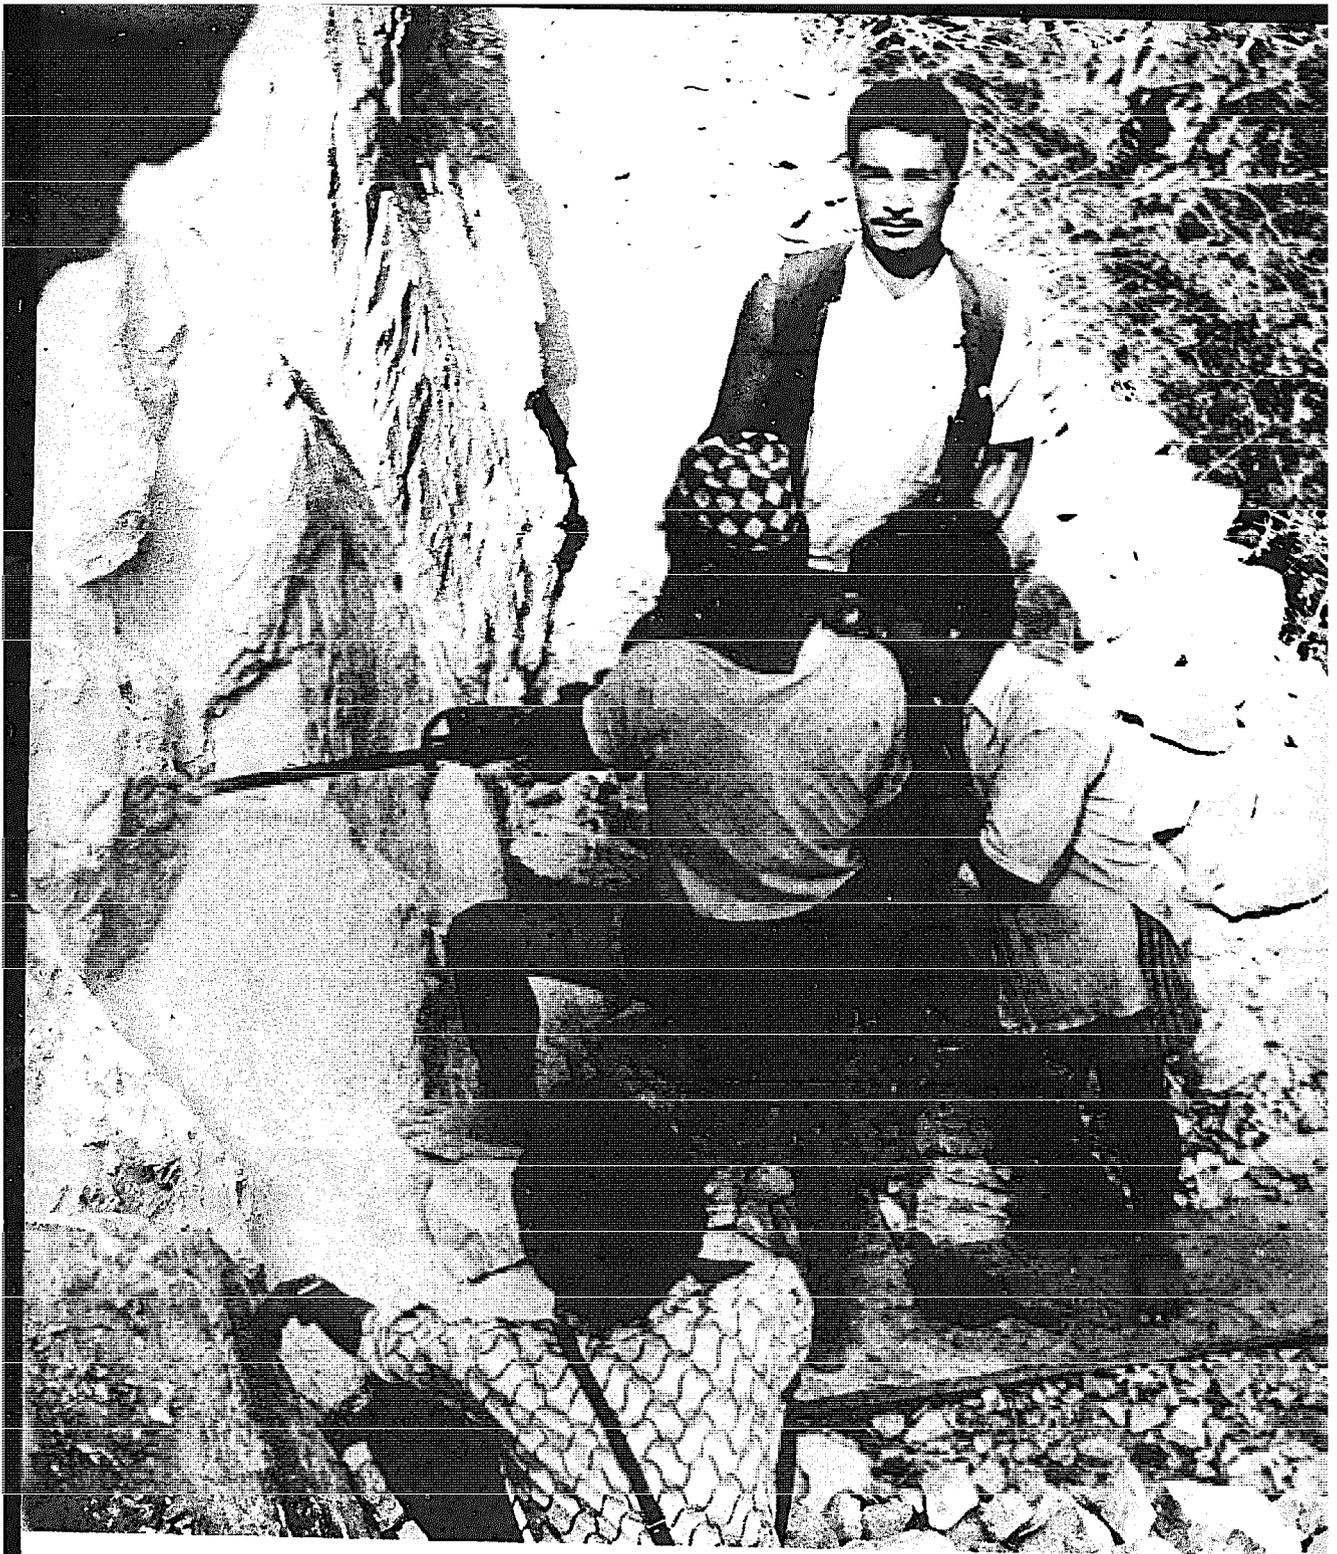

6. MACHINES AND TOOLS

MACHINES AND TOOLS



Rock drilling machine,

General description

No.: 6.101


Date: 13.7.75

Sig.: *Redman*

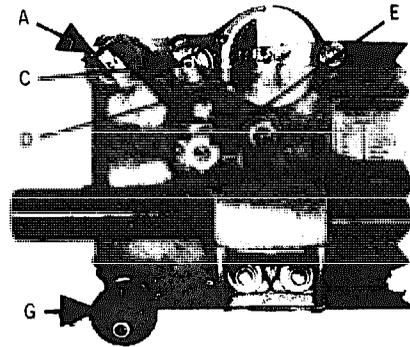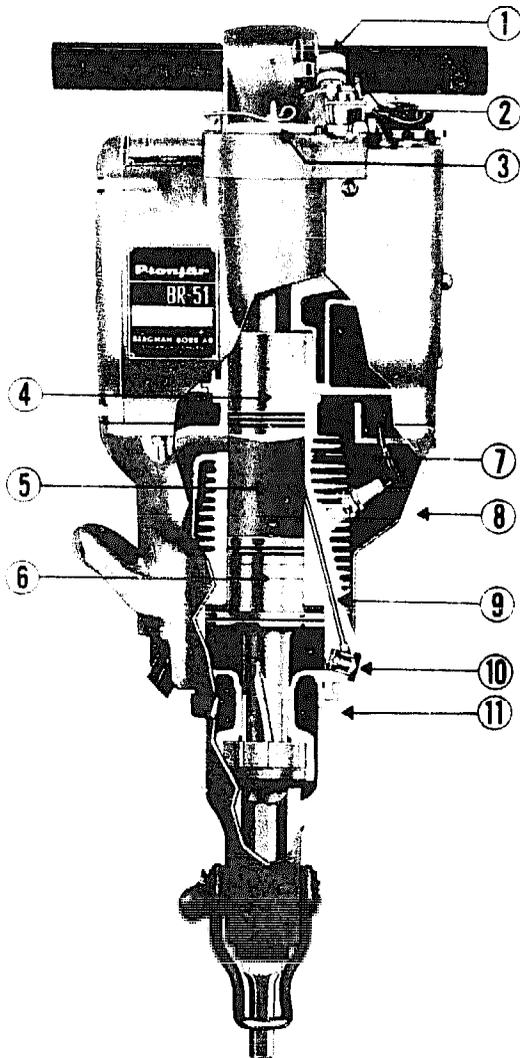

- A Cover of fuel tank
- C Fuel valve
- D Cover of air filter
- E Slow run control
- F Control lever
- G Starter wire
- J Short-circuit switch
- L Gas duct valve

- 1 Slow run control
- 2 Fuel valve, speed regulator
- 3 Cover of air filter, choke
- 4 Engine piston
- 5 Gas chamber
- 6 Hammer piston
- 7 Cylinder
- 8 Short-circuit switch
- 9 Gas duct with permanent cleaning pin
- 10 Gas duct valve
- 11 Drill shank housing

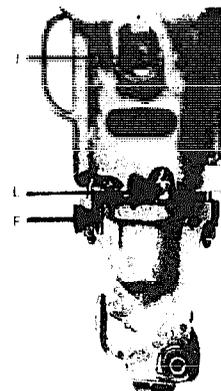

MACHINES AND TOOLS


Rock drilling machine,

**Operation and
Maintenance**

No.: 6.102


Date: 13.7.75

Sig.: *[Signature]*

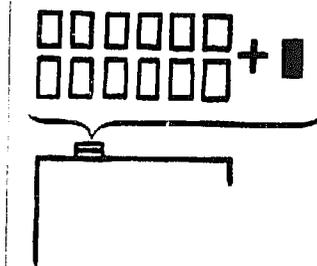


1 Before starting


Mix fuel 1 to 12, i.e. 8%. Use ordinary 2-stroke oil-mixture. Shake well. Fill the tank. The right fuel-mixture is vital!

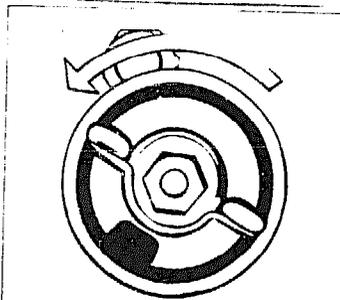


2 Open the fuel needle valve. When the engine is warm the normal setting is half a turn

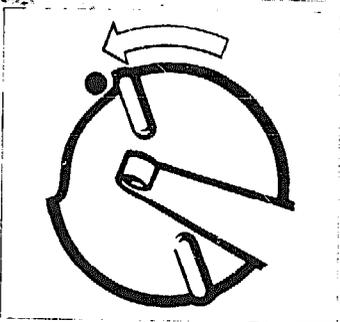

3 Close the choke fully (turn counter-clockwise)

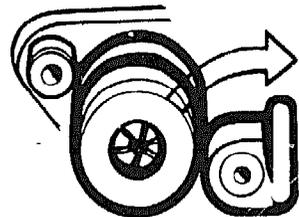

4 Check that the throttle is open — idling latch turned aside

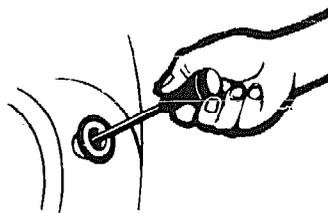

5 Starting and stopping

Pull the starter wire until fuel reaches the engine and it fires


MACHINES AND TOOLS
Rock drilling machine,

**Operation and
Maintenance**


No.: 6.103

Date: 13.7.75


Sig.: *Aptham*

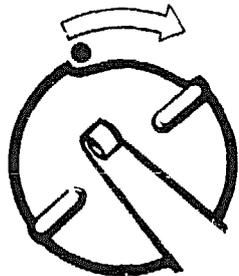


- 6** Open the choke fully.

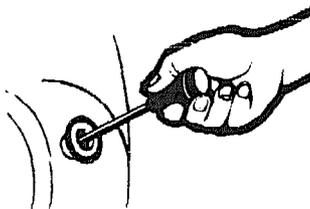


- 7** Pull the starter wire sharply. When the engine has started run it until warm and then adjust the fuel supply for even running.

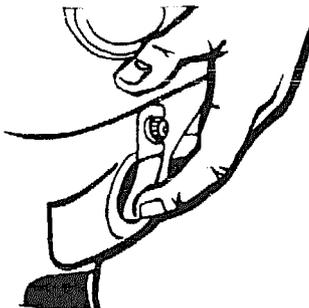


- 8** For brief stops press the short-circuit leaf. For longer stops — close the fuel valve.

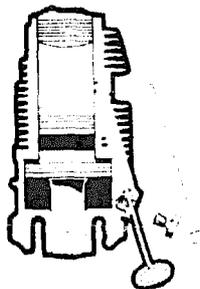

- 9** **Maintenance**
Clean the gas duct, permanent cleaning pin and gas duct valve — preferably every week. Clean the full length of the duct with the cleaning needle. Check the valve.

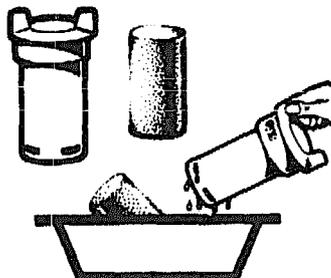


- 10** Clean the air filter every day in oil-mixed fuel. If pure gasoline is used — moisten the filter element with oil before re-assembly.

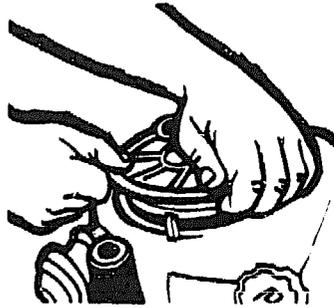


11 Replacing of starter wire


Remove nuts and washers from the cover plate. Lift up the cover together with the starter pulley. Hold the spring against the cover while departing cover and pulley.

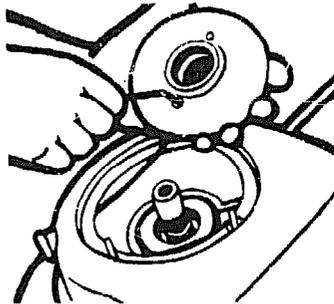


12 Release the starter wire screw and remove the wire

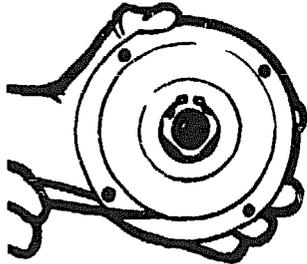

13 Insert the new wire through the bushing in the tank and fix it to the pulley. Re-assemble pulley and cover (with spring). Coil up the wire on the pulley in the direction shown by the arrow on the cover.

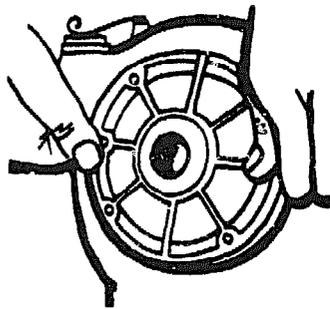

14 Hold the assembled cover over the studs. Turn $\frac{1}{2}$ — $\frac{3}{4}$ of a turn clockwise (to tension the spring) and press it down on the studs. Pull at the same time slightly on the starter wire. Refit washers and nuts.

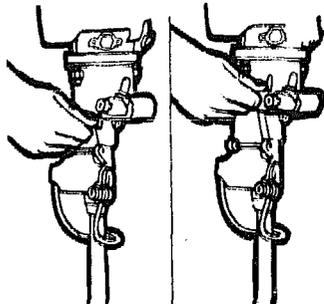

15 Changing from drilling to impact work (BR-80)

Lever down: drilling
Lever up: impact work

MACHINES AND TOOLS


Rock drilling machine,

Toolbag for
maintenance


No.: 6.103

Date: 13.7.75

Sig.: *Richardson*

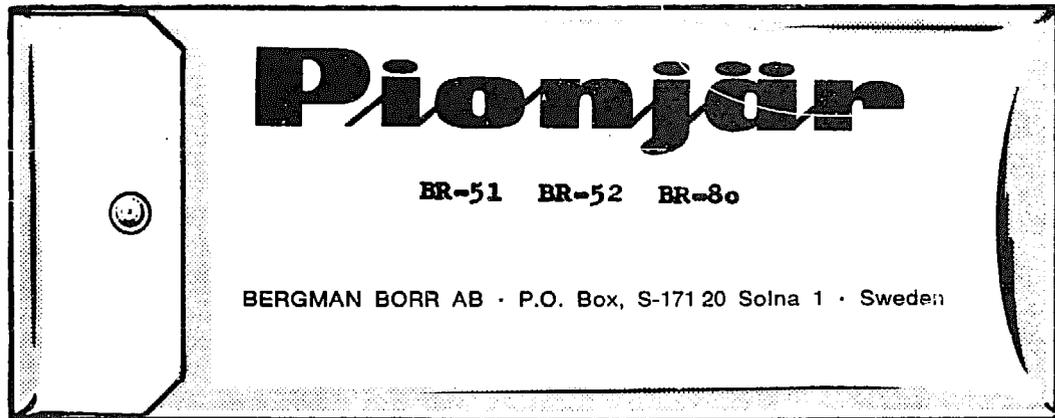


Spark plug wrench

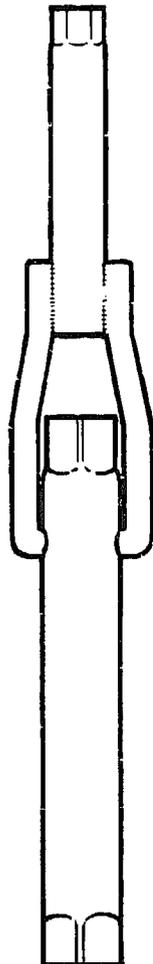

Tool bag

Starter wire

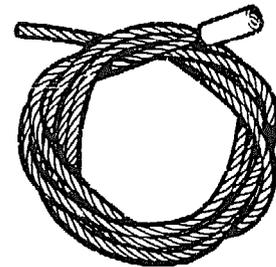

Hexagonal key
(allen wrench)




Gauge for
drill chuck



Spark plug



Grinding gauge for drill bit

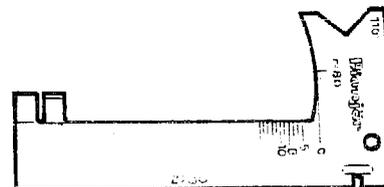

Cleaning needle
for gas duct

SAT A, Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

MACHINES AND TOOLS

Rock drilling machine,


7/8" integral
drill steels

No.: 6.106


Date: 13.7.75

Sig.: *R. S. Sharma*

Nomenclature

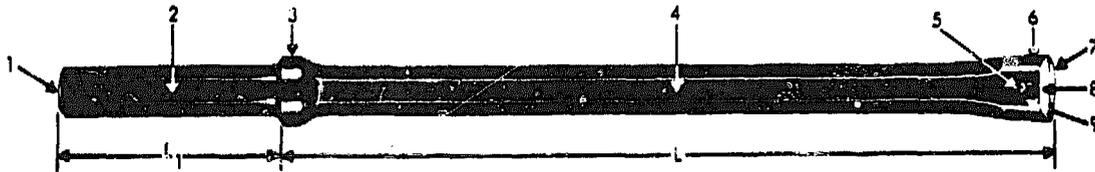

1. Striking surface
2. Shank
3. Collar
4. Rod
5. Flushing hole
6. Carbide insert
7. Cutting edge
8. Wing
9. Bit

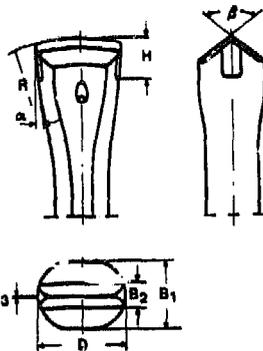

- B₁ Bit thickness
- B₂ Insert width
- B₃ Width of cutting edge
- D Bit diameter
- H Insert height
- L Effective drill-steel length
- L₁ Shank length
- R Cutting edge radius
- α Clearance angle
- β Cutting edge angle

7/8" integral drill steels



MANUFACTURERS



SALES AND SERVICE



Atlas Copco (India) Pvt. Ltd.

Head Office:
Mahatma Gandhi Memorial Building,

Netaji Subhas Road, Bombay-2.

Series	Effective length		Bit diameter mm in.	Catalogue No.
	mm	ft. in.		
11	800	2' 7"	34 1 ¹¹ / ₃₂	714-0834
	1600	5' 3"	33 1 ¹⁹ / ₆₄	714-1633
	2400	7' 10"	32 1 1/4	714-2432
	3200	10' 6"	31 1 7/32	714-3231
	4000	13' 1"	30 1 3/16	714-4030
	4800	15' 9"	29 1 7/64	714-4829
12	800	2' 7"	40 1 ³⁷ / ₆₄	714-0840
	1600	5' 3"	39 1 ¹⁷ / ₃₂	714-1639
	2400	7' 10"	38 1 1/2	714-2438
	3200	10' 6"	37 1 ²⁹ / ₆₄	714-3237
	4000	13' 1"	36 1 ²⁷ / ₆₄	714-4036
	4800	15' 9"	35 1 3/8	714-4835
13	5600	18' 4"	34 1 ¹¹ / ₃₂	714-5634
	6400	21'	33 1 ¹⁹ / ₆₄	714-6433
	400	1' 4"	34 1 ¹¹ / ₃₂	714-0434
	800	2' 7"	33 1 ¹⁹ / ₆₄	714-0833
	1200	3' 11"	32 1 1/4	714-1232
	1800	5' 5"	31 1 7/32	714-1831
16	2000	6' 8"	30 1 3/16	714-2030
	600	2'	35 1 3/8	714-0635
	1200	3' 11"	34 1 ¹¹ / ₃₂	714-1234
	1800	5' 11"	33 1 ¹⁹ / ₆₄	714-1833
17	2400	7' 10"	32 1 1/4	714-2432
	800	2'	41 1 3/8	714-0841
	1200	3' 11"	40 1 ³⁷ / ₆₄	714-1240
	1800	5' 11"	39 1 ¹⁷ / ₃₂	714-1839
	2400	7' 10"	38 1 1/2	714-2438
Boulder steel	500	1' 8"	32 1 1/4	714-0532

S A T A , Swiss Association for Technical Assistance

HMC Nepal

Roads Department

Suspension Bridge Division

MACHINES AND TOOLS



Rock drilling machine,

Grinding of
drill bits

No.: 6.107

Date: 17.7.75

Sig.: *Arbman*

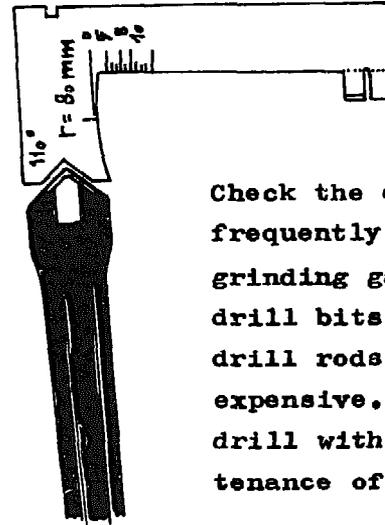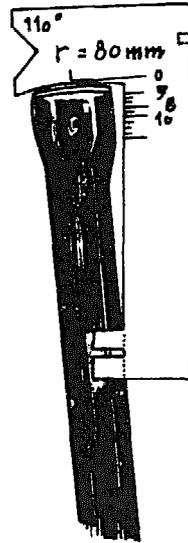

Check the drill bits frequently with the grinding gauge for drill bits. Quality drill rods are very expensive. Do not drill without maintenance of the bits.

The maintenance of drill bits can be done on ordinary grinding machines in any mechanical workshop. It is not possible to sharpen the drill bits with files, because the drill bit consists of very hard tungsten carbide steel.

Under field conditions you can use, if available, a special Pionjär grinding machine, driven by the drilling machine itself.



Fix the drill bit a few millimetres distance from the grinding wheel. In any case use protective glasses for the grinding work.

MACHINES AND TOOLS


No.: 6.201

Pulley systems, Different combinations

Date: 15.9.75

Fig.: *Unknown*

One-part Line

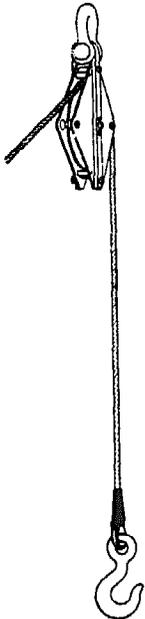

Load on Rope
same as Sup-
ported Load

Two-part Line



Load on Rope
is one-half
Supported
Load

Three-part Line



Load on Rope
is one-third
Supported
Load

Four-part Line



Load on Rope
is one-fourth
Supported
Load

Five-part Line



Load on Rope
is one-fifth
Supported
Load





S.A.T.A. - Swiss Association for Technical Assistance

MACHINES AND TOOLS
Pulley systems, Load calculation

No.: 6.202

Date: 15.9.75

Sig.: *Subman*

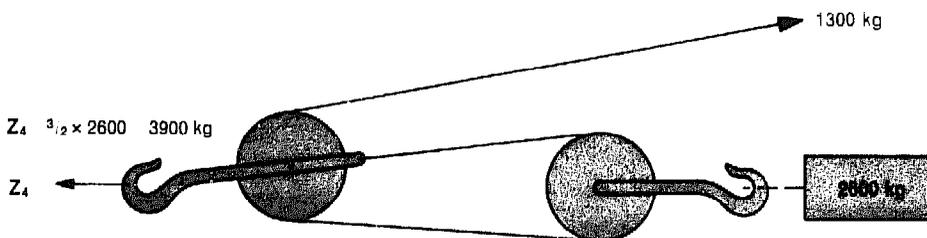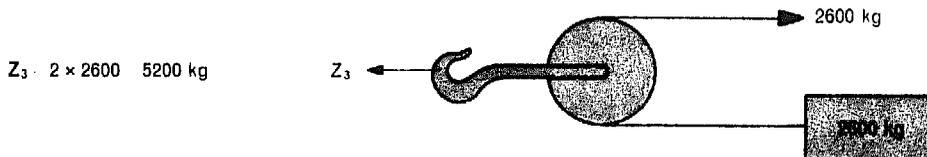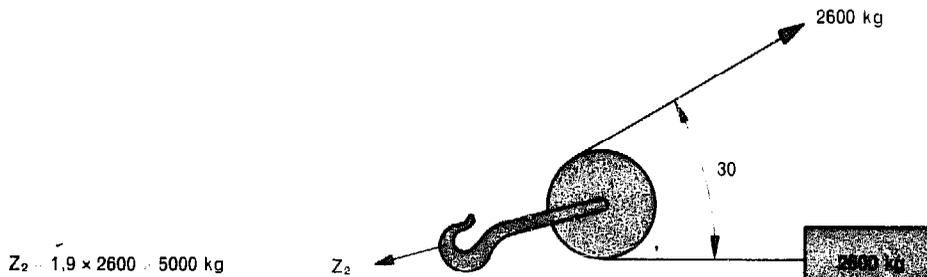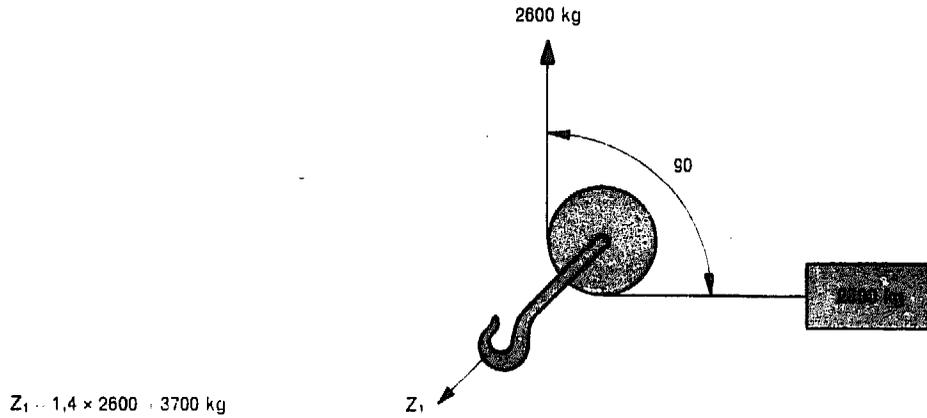

S.T.A., SWISS ASSOCIATION FOR TECHNICAL ASSISTANCE

MACHINES AND TOOLS

No.: 6.301

Pulling Machines ,

Tirfor (I)

Date: 22.10.1975

Sig.: *J. J. J.*

There are two models in use

- Model T 13 Nominal capacity 2.5 tons (pulling)
- Model T 35 Nominal capacity 5.2 tons (pulling)

1. General Remarks

T 13 and T 35 are hand operated pulling and lifting units with an unlimited rope travel. They work by direct pull on the rope, the pull being applied by means of two pairs of self energizing smooth jaws which exert a grip on the rope in proportion to the load actually being lifted or pulled.

The two levers that actuate the jaws provide a forward or backward motion to the rope, depending on whichever lever is used.


2. Operation

Preparation: (compare sketches below)

- Uncoil the special rope in a straight line to prevent loops which might untwist the strands or form kinks when under tension.
- Pull release handle "P" towards the hook (towards the anchor pin for T 35) into notched position. This opens the jaws.
- Insert the fused end of the rope at "A" the machine lying on the ground; this is the best position for feeding the rope between the jaws. Push the rope into the machine until it emerges at "B".
- Anchor the machine and the cable hook with correct slings.
- Pull the wire rope until it is tight on the load.
- Push back release handle "P".

Sketch of T 13


Pulling 2.5 tons
Lifting 1.5 tons

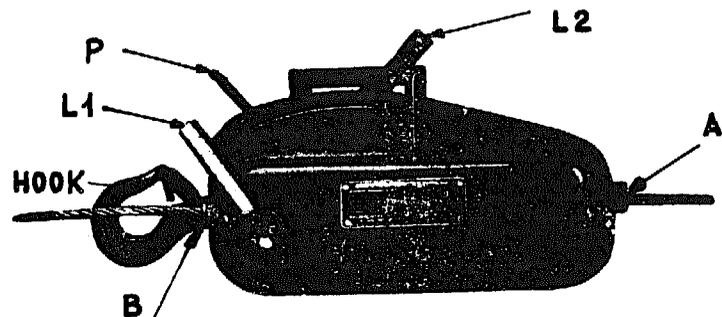

Sketch of T 35

Pulling 5.2 tons
Lifting 3.2 tons

ANCHOR PIN

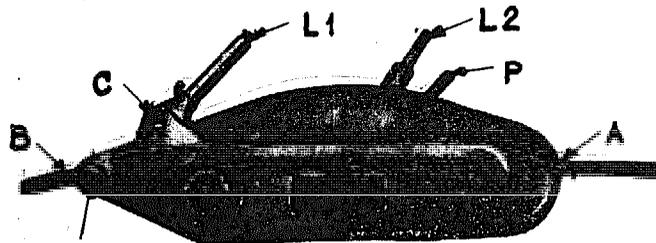

MACHINES AND TOOLS

No.: 6.502

Pulling Machines

Tirfor (II)

Date: 22.10.1975

Sig.:

Pulling or lifting:

- Fix and lock the telescopic operating handle on stub "L 1".
- Move the lever to and fro to move the rope through the machine.
- As the machines do not have ratchets, the operating handle needs not be used through its full stroke. If space is confined, short strokes can be made. The load is moved on both forward and backward strokes of the handle, and the handle can be left in any position of its stroke with out danger of "flying".

Slacking the wire-rope or lowering:

- Fix the telescope operating handle on stub "L 2".
- For T 35 only: Place "L 1" on fast speed.
- Move to and fro as above.
- For T 35 to change speed:
 - Fast speed: for approach, lift button on top of "L 1" and give pin "C" a half-turn.
 - Slow speed: for high load, reverse above operation.

Note: - Make sure that the effort to be exerted is within the rated capacity of the machine.

- Never operate forward and reverse at the same time.
- Levers "P" and "L 2" must move freely at all times.

Releasing or disengaging the wire-rope:

It is impossible to operate rope-release-handle "P" when there is any load on the machine, as the jaws are locked on the rope by the tension in the rope.

Operate rope-reverse-lever "L 2" to take load off the machine, then pull "P" into the notch and remove the cable.

3. Lubrication

- Lubrication should be carried out at regular intervals to ensure that all the rope gripping mechanisms are working freely. Before putting a machine into service lubricate generously and, if convenient, lubricate before each application.
- A symptom of lack of lubrication is jerkiness when lowering a load.
- To lubricate either pour heavy gear oil into the machine through the slot on the top of the machine, shake the machine and allow to drain, or squirt plenty of oil with an oil gun into the machine.
- Excess lubrication cannot cause the wire-rope to slip. Wire-rope should also be lubricated to keep it free from rust and in good condition.

Remark: These are the instructions from the manufacturer.

On the Chirkotar-bridge erection the cable started to slip out of the machine after it had got in touch with coal-tar-paint. Therefor pay attention while working on the bridge-deck.

MACHINES AND TOOLS

Pulling Machines

Tirfor (III)

No. : 1003


Date : 2.1.77

Sig : R. Ghel

HABGGER GRIPHOIST T 35

Special wire rope


The special wire rope is designed to meet the requirements of the machine. Ordinary wire ropes deform under the pressure of the jaws, causing malfunction of the machine.

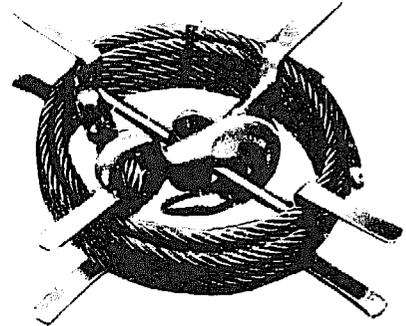

- The wire rope should be reeled and unreeled in a straight line to prevent kinking.
- To avoid unspinning of the strands, never allow a loaded cable to rotate.
- Kinked wire rope will not work in the machines. Never use the cable for a sling, instead a separate wire rope or a chain sling should be used.
- Never subject the wire rope to abrasion by rubbing over sharp edges.

Operation

- 1 Push clutch actuating lever "P" firmly towards position "S", this opens both pairs of jaws.
- 2 Introduce tapered end of wire rope through guide bushing "C" towards "D".
- 3 Pull wire rope coming out of the anchor pin side by hand and tighten to load. The push clutch actuating lever "P" back into position "E".
- 4 Place telescopic handle on power stroke lever "L1". Engage notch in locking pin and fix lever by turning it round. Pulling or lifting are carried out by a steady backward and forward movement on power stroke lever. Jerking motion should be avoided to ensure a smooth operation. The load can be lowered or released by operating release lever "L2" in the same way. Never operate both levers at the same time.
- 5 On completion of operation slacken the wire rope completely by operating release lever, pull clutch actuating lever and remove wire rope. Bring clutch actuating lever back into closed position. It is impossible with human effort to release clutch while the machine is under load exceeding 220 lbs.

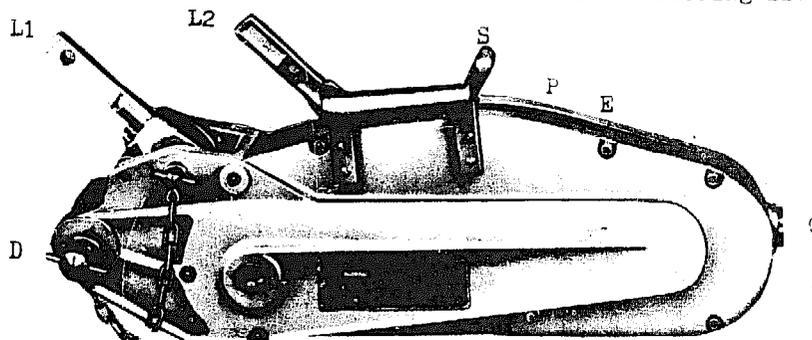

MACHINES AND TOOLS

No. : 6.304

Pulling Machines


accessories

Date : 2.1.77


Sig : R. Prol

Cable brake

for cable \varnothing 10-14mm
capacity: 2.0 tons

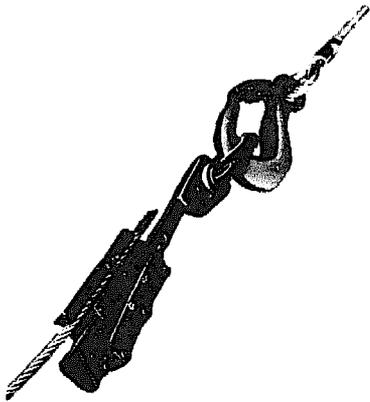

Field anchors "Titan"

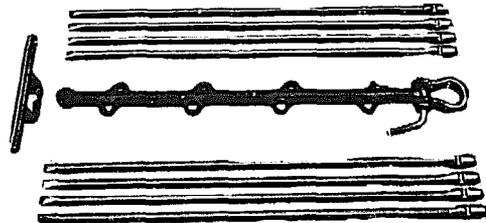

Hoist block

one reel
capacity: 5.0 tons



Hoist block

two reels
capacity: 5.0 tons



SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division


MACHINES AND TOOLS

Different Tools

No. : 6.401

Date : 2.1.77

Sig : R. Ghali

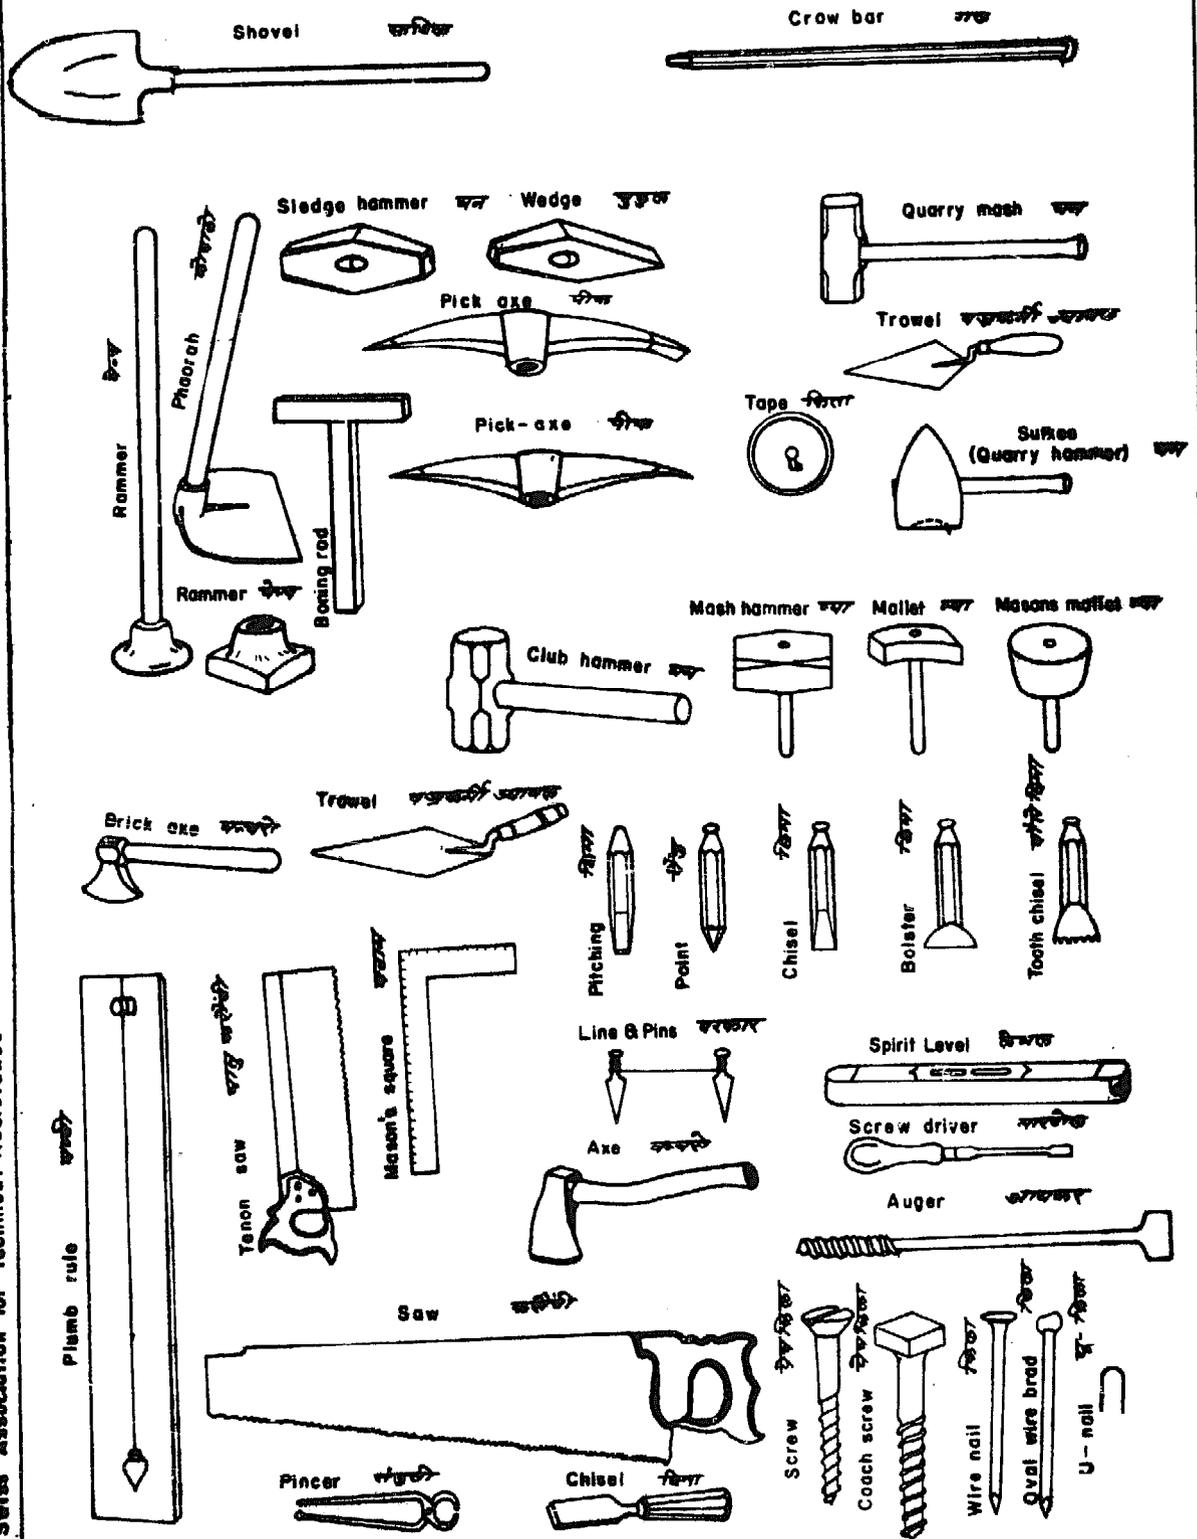

S.A.T.A., Swiss Association for Technical Assistance

INDEX

A

Access to the bridge, 3.801
Active earth pressure, 3.501 ff, 3.801, 3.804
Active wedge, 3.801
Adamghat 12.201 ff
Allowable bearing pressure, 3.102
Anchor bars, 3.604, 3.704 ff, 3.918
 blocks, 3.601, 3.701 ff, 8.104, 9.302 ff, 9.312, 10.704
 hook, 3.1918
 parts, 9.309, 9.311 ff, 10.703, 7.214, 5.203 ff
 rods, 3.204, 9.204, 9.312
 wall, 3.801 ff
Anchorage parts, 7.24, 9.309, 9.11 ff, 10.703
Anchorage
 Typ No. 1, 3.601 ff
 Typ No. 2, 3.601, 3.603
 Typ No. 3, 3.601, 3.604
 Typ No. 4, 3.601, 3.605
Angle, 5.301
Angle
 internal friction, 3.801, 3.804
 repose, 3.501, 3.801
 trigonometry, 3.912
 wall friction, 3.502
Approach trail, 4.103
Arcus 3.912
Area, 3.915 ff
Assembly, 7.501, 7.503, 10.101 ff
Auger boring, 4.303
Available Standard Drawings, 2.305, 2.404
Axial force, 3.908 ff

B

Backfill
 Compaction, 3.401, 3.801
 Drainage, 3.401
 Filling, 3.401, 12.202
Back stay angle, 2.301, 2.302
Back stay cable, 2.302
Bars, 5.305
Base, 2.304, 7.502, 9.307
Base of the Pylon, 2.304
Batter, 3.505
Bearing
 capacity, 3.102
 reaction, 2.304
 rivet and bolt, 5.304

Bench mark, 4.210
Bending moments, 3.803, 3.911
Bi-axial compressed foundation, 3.803, 3.901 ff
Black bolts, 5.304
Blasting, 9.202
Blocks, refer to anchor blocks etc.
Bolting, 7.501
Bolts, 5.304
Bond stress, 3.605
Boring, 4.302
Boulders, 3.101, 4.305
Bracing, 2.101, 2.302, 2.501, 13.101 ff, 13.202 ff
Breaking load, strength, 2.802, 5.103 ff
Breast wall, 3.505
Bridge
 centre line, 8.105
 costs, 4.101, 7.101 ff, 7.201 ff, 7.301 ff, 7.401 ff
 design, refer to chapters 2. Bridge Design and 3. Structural Analysis
 wire, 2.605, 5.106, 10.701 ff
 position, 8.101 ff
 suspended, 2.102, 2.401 ff, 7.301 ff, 9.309, 10.601, 13.201 ff
 suspension, 2.101, 2.301 ff, 7.401 ff, 13.101 ff
Buckling, 5.501 ff
Bulldog grips, 5.202
Buttressed wall, 3.504
Butts, 7.502

C

Cable, 2.304, 2.802, 5.102 ff,
 break, 6.304
 c - clamp, 5.202
 car, 2.701 ff
 end clamp, 5.203 ff, 13.201
 length, 2.403, 2.601, 2.604
 saddle, 13.102, 13.201
 weight, 5.102 ff
Camp establishment, 7.202, 7.222
Caps, 7.502
Cat - walk, see suspended bridge
Cat - walk, 10.701 ff
Cat - walk cable bridge 2.401 ff
Centre of gravity, 3.703, 5.301 ff
Centre line, 8.105
Central suspender, 10.301
Chacklight, 1.103
Channels, 5.302
Check up, 10.501, 10.801
Chilimay Khola, 1.112

Classification, 4.305, 4.309
Clay, 3.101 ff, 4.305
Clearance, 7.501
Cobble, 4.305
Coefficient
 active earth pressure, 3.502, 3.801, 3.804 ff
 friction, 3.501, 3.601 ff, 5.203 ff
 passive earth pressure, 3.801, 3.804 ff
Collection of material, 9.101
Colour indication, 3.917
Column base, 2.304
Column element, 2.302, 5.501, 7.502, 13.101 ff
Completed bridges, 1.301
Concentrated single load, 2.701 ff
Concrete, 5.401, 9.301, 9.306 ff, 3.908 ff, 3.803
Condition of roads, 7.601 ff
Connecting plates, 2.302, 10.103
Construction chart, 7.101
Container, 9.204
Conversation tables, 3.913 ff
Cross beam, 2.301, 2.401, 2.804
Cosine, 3.912
Cost, 4.101 and chapter 7. Cost estimate
Counterfort wall, 3.504, 3.508
Curvature, 10.801
Cutting, 5.103, 7.501

D

Damage, 5.101
Dead - Load, 2.301, 2.303, 2.401, 2.403
Dead load sags, 2.303, 2.403, 2.901
Deadman, 3.801 ff
Decreasing of sags, 2.806
Deflection, 3.911
Delivery, 7.302, 7.403
Design specification, 2.301 ff, 2.401 ff, 2.501
Devighat, 1.203
Dhaunebagar, 1.102
Diagonal system, 2.501
Dilatancy, 4.306
Dimensioning of reinforced concrete, 3.706 ff, 3.908 ff
DIN 1052 (Buckling Numbers), 5.502
Distance, 4.208, 4.213 ff, 7.601
Double eccentric loading, 3.901 ff
Drainage, 3.401
Drawing, 2.305, 2.404

Dressing, 7.211
Drill bits, 6.107
Drilling, 9.202, 6.01 ff
Drum anchorage, 5.203 ff, 13.201 ff
Drystone retaining wall, 3.505
Dry strength, 4.306
Dynamic behavior, 2.602

E

Earth pressure, 3.501, 3.506
 coefficient, 3.502, 3.801, 3.804 ff
 resistance, 3.501, 3.801
 timbering, on, 3.201
Eccentricity, 3.701
Eccentric loading, 3.901 ff
Elastic elongation, 2.601
Elongation, 2.601
Establishment of the camp, 7.202, 7.222
Erection hook, 10.101 ff, 10.206
Evaluation, 4.401 ff
Equal angles, 5.301
Excavation, 3.201, 3.201 ff
Execution, 7.101 ff, chapter 9., 12.101

F

Fabrication, 7.301 ff, 7.401 ff, 7.501 ff
Fabrication points, 7.601
Factor of friction (sliding), 3.501, 3.601 ff, 3.604 ff,
 3.701, 3.708, 5.203 ff
Factor of safety, 2.303, 2.403, 3.701, 3.705, 3.801 ff
Feed back, 12.101
Feet, 3.914
Fibre core construction, 5.105, 10.701 ff
Fibre glass planks, 7.218
Field anchors, 6.304
Field welding, 7.503
Finish off, 10.501, 10.801
Fitting, 10.601 ff
Fixation cable, 2.301, 2.401 ff, 9.307
Fixing, 8.103
Foundation, 3.301, 3.501, 3.708 (see anchor blocks)
Friction resistance, 3.503, 3.802 (see sliding, safety)
Free board line, 2.101 ff, 3.301

G

Gabion wall, 3.301, 3.504, 9.401
Gangway, see walk way
Geometry of the pylon, 2.304
Golgung Khola, 1.113
Gravel, 3.101, 4.305, 9.101
Gravity block, 3.601 ff, 3.701
Gravity/Earth block, 3.601, 3.603
Gravity/Rock block, 3.601, 3.604, 3.704
Gravity wall, 3.504, 3.507
Gridding, 6.107
Ground surface, 3.401, 3.505, 3.603, 3.301 ff, 3.805

H

Habegger, 6.303
Handling, 7.501
Hanger, 2.401 ff, 10.602
Hand rail cable, 2.301, 2.401, 10.203
Heel, 3.508
Height of the pylon, 2.303 ff, 7.216
Hinge, 2.302, 2.807, 13.101 ff
Hinged Pylon, 2.302, 2.807, 13.101 ff
Hoist block, 6.201 ff
Hoisting, 10.105, 10.201
Hook, 3.917
Holing, 7.501
Horizontal force, 2.601 ff, 2.701 ff, 2.807
Horizontal distances, 4.213 ff
Hydrology, 4.103

I

Inclination of slope, 3.201
Inclined bottom, 3.708, 3.905
Inclined span, 1.102, 1.108, 2.401, 2.504
Increase in sag, 2.303, 2.403, 2.601, 2.604
Increasing of span, 2.805
India cable, 5.103
Inspection, 7.503
Internal angle (friction), 3.501, 3.801
Interpolation, 4.401

J

Jairamghat, 12.301 ff
Japan cable, 5.103
Jauljibi, 1.107
Joint sealer, 5.203 ff

K

Key, 3.503, 3.508
Khoranga Khola, 1.117
Kinks, 5.101
Kothe bridge, 1.105

L

Laboratory test of soil, 4.304 ff
Layers, 3.401, 3.801
Lay out, 8.104, 8.201, 9.308, 9.310
Length of the cable, 2.403, 2.601, 2.601, 2.701
Levelling, 4.210
Levelling instrument, 4.216 ff
Limestone, 4.308
Load
 dead, 2.301, 2.303, 2.403
 live, 2.301, 2.303, 2.401, 2.403
 wind, 2.301, 2.401, 2.501
 full, 2.303, 2.403, 2.501
Local material, 4.103
Location, 4.102
Lodey Chat, 1.115
Lubrication, 10.207

M

Machining, 7.502
Main anchor block, 3.804, 8.104, 9.302, 9.304, 9.311 ff,
 refer also to anchor block
Main cables, 2.303, 2.403
Maintenance, 11.101 ff, 12.101, 12.201 ff, 12.301 ff
Mangmaya Khola, 1.108
Marking, 7.503
Masonry work, 7.211, 9.306 ff
Material, 4.103, 5.101 ff, 5.201 ff, 5.301 ff, 5.401 ff,
 5.501, 9.101
Max. soil pressure, 3.102, 3.508, 3.701, 3.901 ff
Mensuration, 3.915 ff
Methods of survey, 4.201 ff
Moments, 3.803, 3.911
Mortar container, 9.204

N

Netting, 2.301, 2.401
Network (roads), 7.601
Nibu Khola, 1.111
Nomenclature
 Suspended Bridges, 2.101
 Suspension Bridges, 2.101
 Tools, 6.401

O

Overturning, 3.501, 3.503, 3.701
Operation and Maintenance, 6.102 ff

P

Packing, 7.503
Painting, 7.205, 7.218 ff, 7.225, 7.236, 7.502
Parabola, 2.201 ff, 2.204, 2.601, 2.604
Parabolic system, 2.501
Parallel wire cluster, 10.701 ff
Papapets, 2.301, 2.401
Passive earth pressure, 3.501, 3.801, 3.804 ff
Passive wedge, 3.801
Pebbles, 3.101
Pedestrian bridges, 1.301
Pikuwa Khola, 1.116, 4.205, 4.301
Pitching, 3.505
Pjondr, 6.101 ff
Placing of foundation, 3.301 ff
Placing of steel parts, 9.312
Planks, 2.402, 5.501, 7.218
Planning, 1.302, 7.101, 12.101
Plates, 5.303
Plotting work, 4.401
Plumb concrete, 5.401
Pre - stress, 2.304, 10.801
Profile, 4.202
Protection, 9.401
Pulley, 6.201 ff, 6.304
Pulling machine, 6.301 ff
Purchudi Hat, 1.110
Pylon, 2.302 ff, 7.216, 10.101 ff, 13.101 ff
Pylon
 anchorage, 9.304
 base, 2.304
 foundation, 3.903, 9.307
 geometry, 2.304
 height, 2.303, 2.304, 7.216
 reaction, 2.304

Q

Quotation
 suspended bridge, 7.301 ff
 suspension bridge, 7.401 ff
 terms of steelwork, 7.501 ff

R

Reaction, 2.304, 2.307
Recommended concrete mixes, 5.401
Reference points, 4.201
Reinforced Concrete, 3.803, 3.903 ff
Reinforcement, 3.707, 3.908 ff, 3.305, 7.301, 7.401, 3.803
Retaining walls, 3.501, 3.50 ff
 backfill compaction, 3.401
 backfill drainage, 3.401
 breast wall, 3.505
 buttressed wall, 3.504
 cantilever wall, 3.504, 3.508
 counterfort wall, 3.504
 deadman, 3.801 ff
 design, 3.507
 drainage, 3.401
 drystone, 3.505
 earth pressure, 3.102, 3.501 ff, 3.801, 3.804
 foundation stability, 3.503
 gabion, 3.301, 3.504, 9.401
 gravity wall, 3.503, 3.507, 3.508
 overturning, 3.503
 placing, 3.301 ff
 sliding, 3.501, 3.708, 3.801
 soil failure, 3.102, 3.503
 structural components, 3.503, 3.506 ff
 swedish circle methods, 3.302 ff
 types, 3.503 ff
Ribbed - Torsteel, 5.305
Riverbank, 9.401
Rivets, 5.304
Roads, 7.601 ff
Rock, 3.101, 4.203, 4.308
 anchor, 3.601, 3.605, 3.706 ff, 9.202 ff,
 bearing, 3.102, 3.605
 blasting, 9.202
 block, 3.601, 3.604, 3.704
 drilling, 9.202
 excavation, 9.201
 resistance, 3.604 ff
Rods, 3.918, 5.303
Ropeway Company, 5.105
Rounds, 5.303
Rubbels, 9.101

S

Saddle, 2.807, 13.101, 13.202
Safe bearing capacity, 3.102
Safety, refer to stability etc. , 7.501
Sags, 2.301, 2.303, 2.401, 2.403, 3.501
Sal, 5.501
Salla, 5.501
Sand, 3.101, 4.305, 9.101
Sandstone, 4.308
SATA, 1.301
Screw, 6.401
Sekhathum 1.109
Semigravity wall, 3.504, 3.508
Shearing, 3.705, 3.911, 5.304
Shear value, 5.304
Shipaghat, 1.201
Shop assembly, 7.501, 13.102 ff, 13.201 ff
Shoring, 3.201
Shuttering, 3.201, 9.301
Side stay
 anchor block, 3.906
 cable, 2.302, 2.304
 reaction, 2.304
Silt, 3.101 ff, 4.305
Sine, 3.912
Single cable, 2.601 ff, 2.701 ff
Single load, 2.701 ff
Single wire, 5.106, 10.701 ff
Site selection, 1.108, 4.101 ff
Site survey, 1.108, 4.201 ff
Slab, 7.502
Slenderness ratio, 5.501 ff
Sliding, 3.501, 3.503, 3.701, 3.708, 5.203 ff
Sliding wedge, 3.501
Slope failure, 3.301 ff
Soil bearing, 3.102, 3.508, 3.701, 3.902
Soil failure, 3.302 ff, 3.601
Soil investigation, 3.101, 4.301 ff, 4.309
Soil protection, 3.505, 9.401
Soil weight, 3.501
Soils, 3.101 ff, 4.306 ff
Solid rounds, 7.502
Spanning cables, 2.301, 2.304, 9.307, 10.201, 10.801
Spans, 2.301 ff, 2.305, 2.401, 2.403, 2.501
Specification, 2.301 ff, 2.401 ff, 7.301 ff, 7.401 ff, 7.501 ff
Spiral cable, 5.105, 5.203 ff
Stability, 3.501 ff, 3.701, 3.703
Stabilizing cables, 2.304

Standard

- design, 2.301 ff, 2.401 ff, 2.501, 2.601 ff
- drawing, 2.305, 2.404
- spans, 2.301 ff, 2.305, 2.401, 2.403, 2.501
- steelparts, 9.309, 10.604, 13.101 ff, 13.201 ff
- suspended bridge, 1.101 ff, 2.02, 2.401 ff, 7.301 ff, 9.309, 13.201 ff
- suspension bridge, 1.101 ff, 2.101, 2.301 ff, 7.401, 13.101 ff
- Statical calculation, 2.801
- Steam, 3.508
- Steel, 5.301 ff, 7.501 ff
- Steel construction, 7.301 ff, 7.401 ff, 7.501 ff, 13.101 ff, 13.201 ff
- Steelparts, 9.309, 10.604, 13.101 ff, 13.201 ff
- Steel temperature, 3.917
- Step method, 4.211 ff
- Stiffness, 2.401, 2.601
- Stones, 9.101
- Storage, 7.503
- Storage points, 7.601
- Straightening, 7.501
- Stresses, 5.501
- Stresses in gravity wall, 3.508
- Structure stability, 3.503
- Sukhadik Bouldik, 1.114
- Survey, 1.108, 4.201 ff
- Suspender, 2.203, 2.401, 2.804, 10.301 ff
- Swedish circle methods, 3.302 ff, 3.601

T

- Tacheometric survey, 4.204, 4.206 ff
- Tangent, 3.912
- Task, Purpose, 12.101
- Technical Data, 2.301 ff, 2.401 ff, 2.501
- Technical report, 4.101 ff
- Temperature, 2.805, 3.917
- Temporary erection fittings
 - cables, 10.101 ff
 - foundation, 10.101 ff
 - hooks, 10.101 ff
- Tension, 2.303 ff, 2.403, 2.601 ff, 2.701 ff
- Terms of steelwork, 7.501 ff
- Test, 7.503, 9.203, 9.205, 13.203
- Test assembly, 7.301, 7.401, 7.503
- Thanatar, 5.205
- Theodolite, 4.206, 4.219 ff
- Thimbles, 5.201, 10.802
- Timber, 5.501
- Timbering, 3.201, 9.301
- Tirfor, 6.301 ff, 10.401

Toe, 3.508
Tools, 6.401, 7.202 ff, 7.222 ff
Top soil, 3.401, 3.801 ff, 9.201
Torsteel, 5.305
Toughness, 4.306
Tower, uncorrect name, because we are dealing with
 hinged systems - i.e. pylons
Transport, 7.201, 7.221, 7.601, 12.101
Transport routes, distances, 4.102, 7.601 ff
Trench, 3.201, 3.401, 9.201
Trench timbering, 3.201
Triangulation, 4.208
Trigonometry, 3.912
Tunnel excavation, 3.601
Types
 trail suspension and suspension bridge, 1.101 ff, 2.301 ff, 2.401 ff
 walls, 3.504

U

Uniformly loaded cable, 2.601 ff
Unreeling, 5.101 ff
Uplift capacity, 3.801
USAID, 1.301

V

Vane test, 4.304
Vertical reactions on the pylon base, 2.304, 2.807
Volume, 3.915 ff

W


Walk way, 2.101, 2.301, 2.401 ff, 7.301, 7.401, 9.305, 10.302, 10.602
Walls
 anchor wall, 3.801 ff
 breast wall, 3.505
 butteressed wall, 3.504
 cantilever wall, 3.504 3.508
 counterfort wall, 3.504
 deadman, 3.801 ff
 design, 3.507
 drainage, 3.401
 drystone, 3.505
 earth pressure, 3.102, 3.501 ff, 3.801, 3.804

alls (continuation)
gabion, 3.301, 3.504, 9.401
gravity wall, 3.503, 3.507, 3.508
placing, 3.301 ff
sliding, 3.501, 3.503, 3.708, 3.801
stability, 3.503
structural components, 3.503, 3.506 ff
types, 3.503 ff
water, 3.401, 3.505
weep holes, 3.401, 3.505
weights of
cable, 5.103 ff
cable fittings, 5.201 ff
steel, 5.301 ff
soil, 3.501
welding, 7.502, 7.503
wind
bracing, 2.501
cable, 2.501
guy, 2.501, 2.808, 10.402
guy anchor block, 3.703, 3.803, 3.905 ff, 8.106 ff
load, 2.301, 2.401, 2.501
load carrying systems, 2.501
tie, 2.501, 2.808, 10.402, 10.403
wire, 5.106, 10.701 ff
wire mesh netting, 2.301, 2.401, 7.218, 7.235
wood, 5.501, 7.205, 7.225
wooden deck, 2.403, 2.803, 5.501, 7.218, 7.235
World Bank, 1.301
work execution, 7.101, 7.220, 9.101 ff, 10.101 ff, 12.101
workshop, 7.301 ff, 7.401 ff, 7.501 ff, 13.101 ff, 13.201 ff

refer to contents list for additional information

H.M.G. OF NEPAL, MINISTRY OF WORKS AND TRANSPORT, ROADS DEPARTMENT
SATA, SWISS ASSOCIATION FOR TECHNICAL ASSISTANCE

PART B

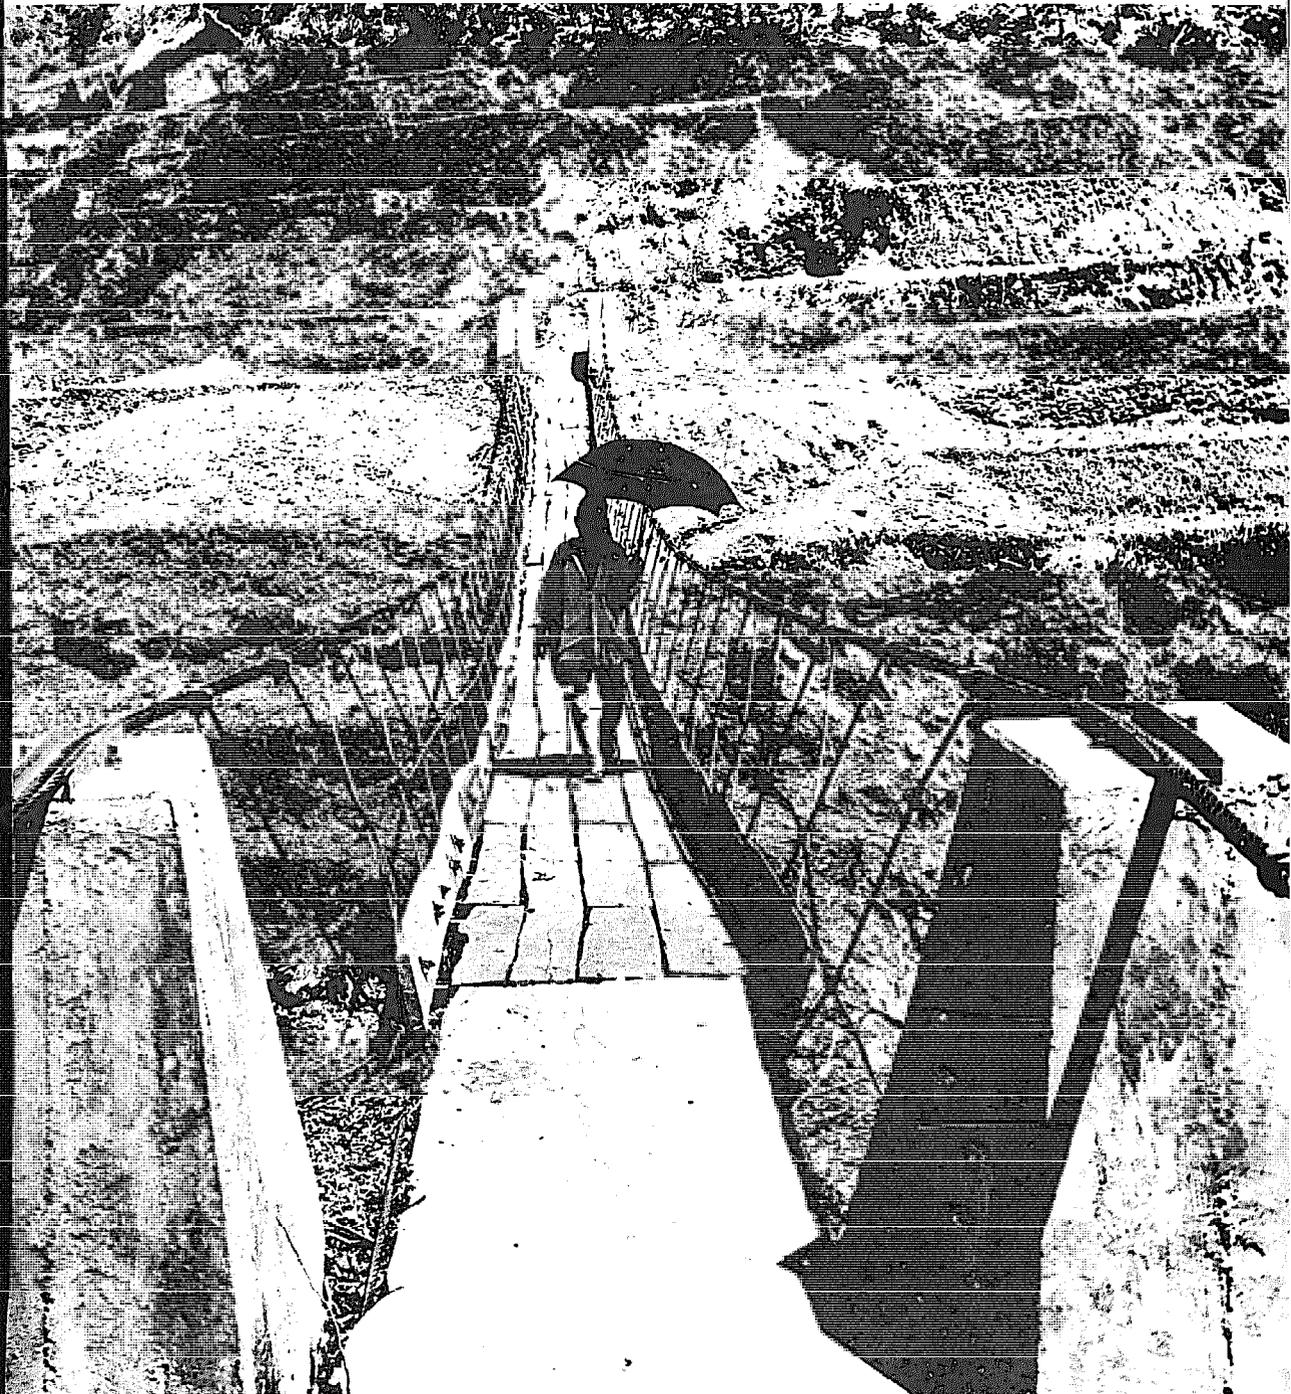

EXECUTION AND MAINTENANCE OF
**STANDARD TRAIL SUSPENDED
AND SUSPENSION BRIDGES**

PREFACE to the second enlarged edition

The manual for construction of suspension bridges will be quite helpful to the engineers who will construct suspension bridges in Nepal. It contains the details of methods of surveying, calculations and design procedures. Previously we did not have any such manual having so much in detail. I have no doubt that this manual will help all the engineers who will construct suspended and suspension bridges, specially those who will be newcomers and work for construction of trail suspension bridges.

At the same time I must appreciate the commendable work done by Mr. H. Pfaffen, civil engineer with SATA.

C. B. Pradhanang

Kathmandu, March 1977

Superintending Engineer

The manual for Trail Suspension Bridges which first appeared in autumn 1975 has now been reedited for this second enlarged edition. The contents were increased at the wish of many for an extensive treatment of the deliberation and analysis necessary to plan, design, estimate and construct standardized bridges.

The suspended bridge (bridge without pylons) was completely accepted as an equally valid solution to the suspension bridge, its standardized design has also been taken into full consideration.

We have not attempted to cover the entire field of the bridge construction work, but rather to select some of the most important sections for unstiffened suspension bridges and their foundation constructions with a special reference to a practical and economical engineering work. It has been assumed that our readers already have a basic knowledge of engineering work and we hope that they will find this book both instructive and covering the matters for execution of trail bridges.

For further assistance we recommend the standardized designs of steelwork for suspended and suspension bridges of HMG's Roads Department compiled with SATA, Swiss Association for Technical Assistance. The quantity of work has, however, been such, that the 330 plans for the unit - construction bridge systems could not be included in this manual. These drawings have been worked out and are available from the Suspension Bridge Division.

This edition was financed by SATA. At the same time I would like to thank all at the Suspension Bridge Division for their helpful comments, especially the SATA engineers Leo Condrau and Robert Groeli for their unvaluable help to complete this manual.

Hans Pfaffen

Kathmandu, March 1977

SATA

PREFACE to the first edition

The descriptions given in this book will be quite helpful specially to those who will be working for suspension bridge projects for the first time. The tables and formulas given will enable the surveyors to work out the calculations on site itself. The instructions to be followed during the construction period will help all the bridge builders to avoid the mistakes that may even lead to the failure of bridges.

C. B. Pradhanang
Superintending Engineer
Suspension Bridge
Division

Kathmandu, September 1975

The Suspension Bridge Division should construct more than 50 foot - trail suspension bridges throughout the country during the 5th Plan (1975 - 1980) period. Past experience has shown that little technical training was provided for newcomers in the field of suspension bridge design and construction work. The Manual as presented now, is in a preliminary phase and should give a basis for future technical training. In advance I would like to thank those who will give critical suggestions, and help for adding new pages.

H. Aschmann
SATA

Kathmandu, September 1975

PART A

1. TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES
- 2 BRIDGE DESIGN
- 3 STRUCTURAL ANALYSIS
- 4 SURVEY OF BRIDGE SITES
- 5 CONSTRUCTION WORK
- 6 MACHINES AND TOOLS

PART B

- 7 COST ESTIMATE
- 8 LAY OUT
- 9 CONSTRUCTION WORK
- 10 BRIDGE ERECTION
- 11 TRAIL IMPROVEMENT
- 12 MAINTENANCE
- 13 PHOTOS OF STANDARD STEEL PARTS

PART B

EXECUTION AND MAINTENANCE

PLANNING, DESIGN AND SURVEY REFER TO PART A

CONTENTS

I. TYPES OF TRAIL SUSPENSION OR SUSPENDED BRIDGES

- 1.1 General Design, Dhaunebagar, Chacklighat, Kothe Bridge, Maurasain, Jauljibi, Mangmaya Khola, Sekhathum, Purchudi Hat, Nibu Khola, Chilimay Khola, Golgung Khola, Sukhadik, Lodey Ghat, Pikuwa Khola, Khoranga Khola
- 1.2 Photos of Suspension and Suspended Bridges
- 1.3 Completed Pedestrian Bridges by HMG' Roads Department Planning by HMG' Suspension Bridge Division of the RD

2. BRIDGE DESIGN

- 2.1 Nomenclature for Suspended and Suspension Bridges
- 2.2 Parabolas, Graphical Method, Factor Method, Suspender Length, Analytical Method
- 2.3 Design Specification for Standard Suspension Bridges, Technical Data, Reaction on the Pylon Base, Stabilizing and Spanning Cables, Available Standard Drawings
- 2.4 Design Specification for Standard Suspended Bridges, Technical Data, Available Standard Drawings
- 2.5 Wind - Bracings for Suspended and Suspended Bridges
- 2.6 Single Cable under uniformly distributed Load, Stiffness, Single Cable under uniformly distributed Load, inclined Span
- 2.7 Single Cable under concentrated single Load (e.g. Cable car) with one Example
- 2.8 Calculation Example for a Suspension Bridge, Analysis for the Cable Forces on a three Span Suspension Bridge
- 2.9 Calculation Example for a Suspended Bridge

3. STRUCTURAL ANALYSES

- 3.1 Soils and Soil Investigation, Bearing Capacity of Soils
- 3.2 Excavation for Foundation, Inclination of Slope, Trench Timbering
- 3.3 Placing of Foundation, the Swedish Circle Methods

- 3.4 Drainage and Backfilling
- 3.5 Retaining Walls and Foundation Structures for Suspended and Suspension Bridges, Active Earthe Pressure, Structure Stability of Anchor Blocks, Walls etc., Types of Walls, Drystone Retaining Wall, Breast Wall, Pitching, Calculation Example for a Retaining Wall, Design of Gravity Wall, Semigravity and Cantilever Wall
- 3.6 Anchor Blocks for Suspension and Suspended Bridges, Gravity Block Typ No. 1, Gravity/Earth Block Typ No. 2, Gravity/Rock Block Typ No. 3, Rock Anchor Typ No. 4
- 3.7 Design of Gravity Anchor Block, Calculation Example for a Main Anchor Block for a Suspended Bridge (without taking any Earth Pressure into Account), Calculation Example for a Wind Guy Anchor Block, Calculation Example for a Gravity/Rock Block for a Suspended Bridge, Example for a Rock Anchorage, Factor of Friction for Inclined Foundation Bottom
- 3.8 Passive Earth Pressure on an Anchor Wall, Calculation Ex-ample for an Anchoe Wall (Deadman used as Main Cable An-chorage), Calculation Example of a Deadman as wind guy An-chorage, Calculation Example of an Anchorage Block for a Suspended Bridge utilizing the Passive Earth Pressure
- 3.9 Double Eccentric Loading, Coefficient for Calculation the max. Soil Bearing of Bi-Axial and Eccentric compressed Foundations, Calculation Example for a Pylon Foundation, Calculation Example for an Anchor Block used as Wind Guy and Side Stay Cable Anchorage, Dimensioning in Reinforced Concrete Construction taking the Axial Compression Force into Account, Bending Moments, Shearing Forces and Deflec-tion, Trigonometry, General Conversion Tables, Mensuration of Areas and Volumes, Colour Indication of Temperature of Steel, Calculation of Anchor Rods and Hooks

4. SURVEY OF BRIDGES SITES

- 4.1 Site Selection and Technical Report
- 4.2 Site Survey after site Selection, Survey Methods, Tacheo-metric Survey, Distances Across the River, Levelling of Bench Marks, "Step-method" for profile and measurement, Measurement of Horizontal Distances on Slopes, Survey Instruments, Levelling and Theodolite

4.3 Soil Investigation, Field Tests, Laboratory Tests, Classification

4.4 Evaluation of the Survey

5. CONSTRUCTION MATERIAL

5.1 Steel Cables, Damage during Transportation and Unreeling, Unreeling the Cables, Cables from India, Cables from Japan, Used Rope Way Cables, Wires P.W.C. (parallel wire cluster)

5.2 Cable Fittings, Thimbles, Cable End fixed with Bulldog Grips and Thimbles, Fixed by Drum and Cable End Clamp, Joint Sealer, Application of the Joint Sealer

5.3 Steel, Equal Angles, Channels, Rounds, Rods, Bars, Flats, Plates, Rivet and Bolt, Ribbed Torsteel for Reinforced Concrete

5.4 Concrete, Recommended Mixes

5.5 Timber, Wood, Permissible Stresses, Round Column, Planks, Buckling Numbers (DIN 1052)

6. MACHINES AND TOOLS

6.1 Rock Drilling, General Description, Operation and Maintenance, Toolbag, 7/8 inch integral Drill Steel, Grinding of Drill Bits

6.2 Pulley System (Hoist Block), Different Combination, Load Calculation by using of Pulley

6.3 Pulling Machines, Tirfor, Habegger, Accessories

6.4 Different Tools

7. COST ESTIMATE

7.1 Planning and Execution Chart for Construction Work on Suspended and Suspension Bridges

7.2 Cost Estimate (Rate Analysis) for Suspension Bridges, Photos of Execution Work, Cost Estimate for Suspended Bridges (Rate Analysis), green printed

- 7.3 Quotation Form for a Standard Suspension Bridge's Steelconstruction etc.
- 7.4 Quotation Form for a Standard Suspended Bridge's Steelconstruction etc.
- 7.5 "Terms of Steelwork" for Suspension and Suspended Bridges as an integral Part of the Quotation Forms
- 7.6 Network of Roads in Nepal, Distances and Conditions of the Roads, Planning of the Road Construction until 1984

8. LAYOUT

- 8.1 Fixing of the Bridge Position, Lay Out of the Blocks, Main Anchorage, Pylon Foundation, Lay Out along a Parallel to the Bridge Centre Line, Wind-Guy Anchorage
- 8.2 Suspended Bridge, Main Anchor Block

9. CONSTRUCTION WORK

- 9.1 General, Collection of Materials
- 9.2 Excavation, Normal Excavation, Trench Excavation, Rock Excavation, Drilling, Blasting, Rock Anchor
- 9.3 Concrete and Masonary Work, Main Anchor Block of a Suspension Bridge, Pylon - and Walk Way Anchorage, Main Anchor Block of a Suspended Bridge, Wind Guy Anchorage, Concrete and Masonary Work, Lay Out of a Suspension Bridge, Photos of Anchorage Parts for a Suspended Bridge, Lay Out of a Suspended Bridge, Fitting of a Main Anchor Block, Fitting of a Main Anchorage
- 9.4 River Bank and Soil Protection

10. BRIDGE ERECTION

- 10.1 Suspension Bridge, Pylon, Pylon Assembling Standard Drawing 90/52, Suspension Bridge, Pylon
- 10.2 Suspension Bridge, Hoisting

- 10.3 Suspension Bridge, Suspenders and Walkway
- 10.4 Suspension Bridge, Wind Guy and Windtie
- 10.5 Finishing Off
- 10.6 Suspended Bridge, Fitting of Anchor Parts, Walk - Way Assembling
- 10.7 Single Wire (parallel wire cluster), Erection, P.W.C. Cable Anchorage, Details
- 10.8 Final Check - Up, Curvature of the Suspension Bridge, Pre-Stress in Cable, Check of all Nuts, Tightening of Bulldog Grips and Turn Buckles, Arrangements for Cable Ends, Fitting of Wire Mesh Netting

11. TRAIL IMPROVEMENT

- 11.1 Maintenance Report of Local Bridges with many Photos

12. MAINTENANCE


- 12.1 Maintenance, General
- 12.2 Maintenance Report of the Adamghat Bridge
- 12.3 Maintenance Report of the Jairamghat Bridge

13. PHOTOS OF STANDARD STEELPARTS

- 13.1 Standardized Steelparts for Suspension Bridges
- 13.2 Standardized Steelparts for Suspended Bridges

INDEX

At the End of the Manual

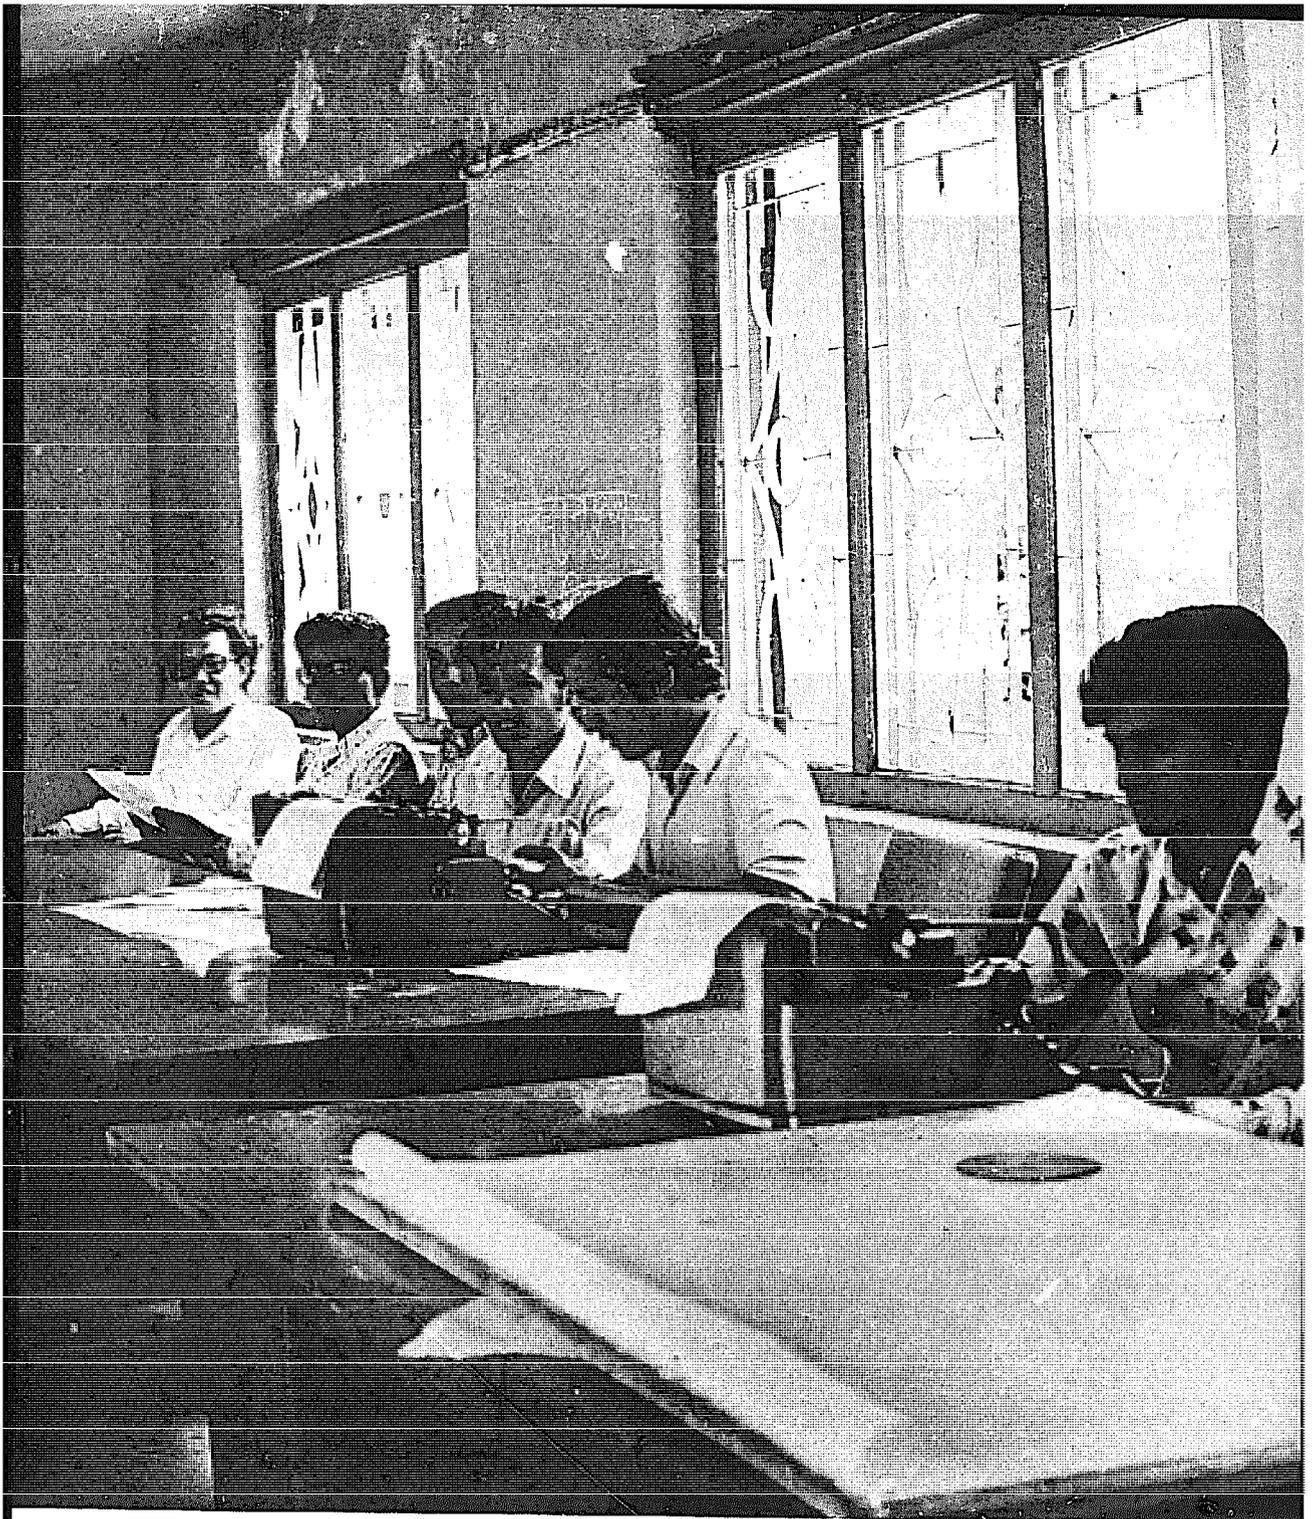

7. COST ESTIMATE

COST ESTIMATE


No. : 7,101

Planning and execution chart for construction work

Date : 26th Febr. 77

Sig. : *[Signature]*

SATA, Swiss Association for Technical Assistance

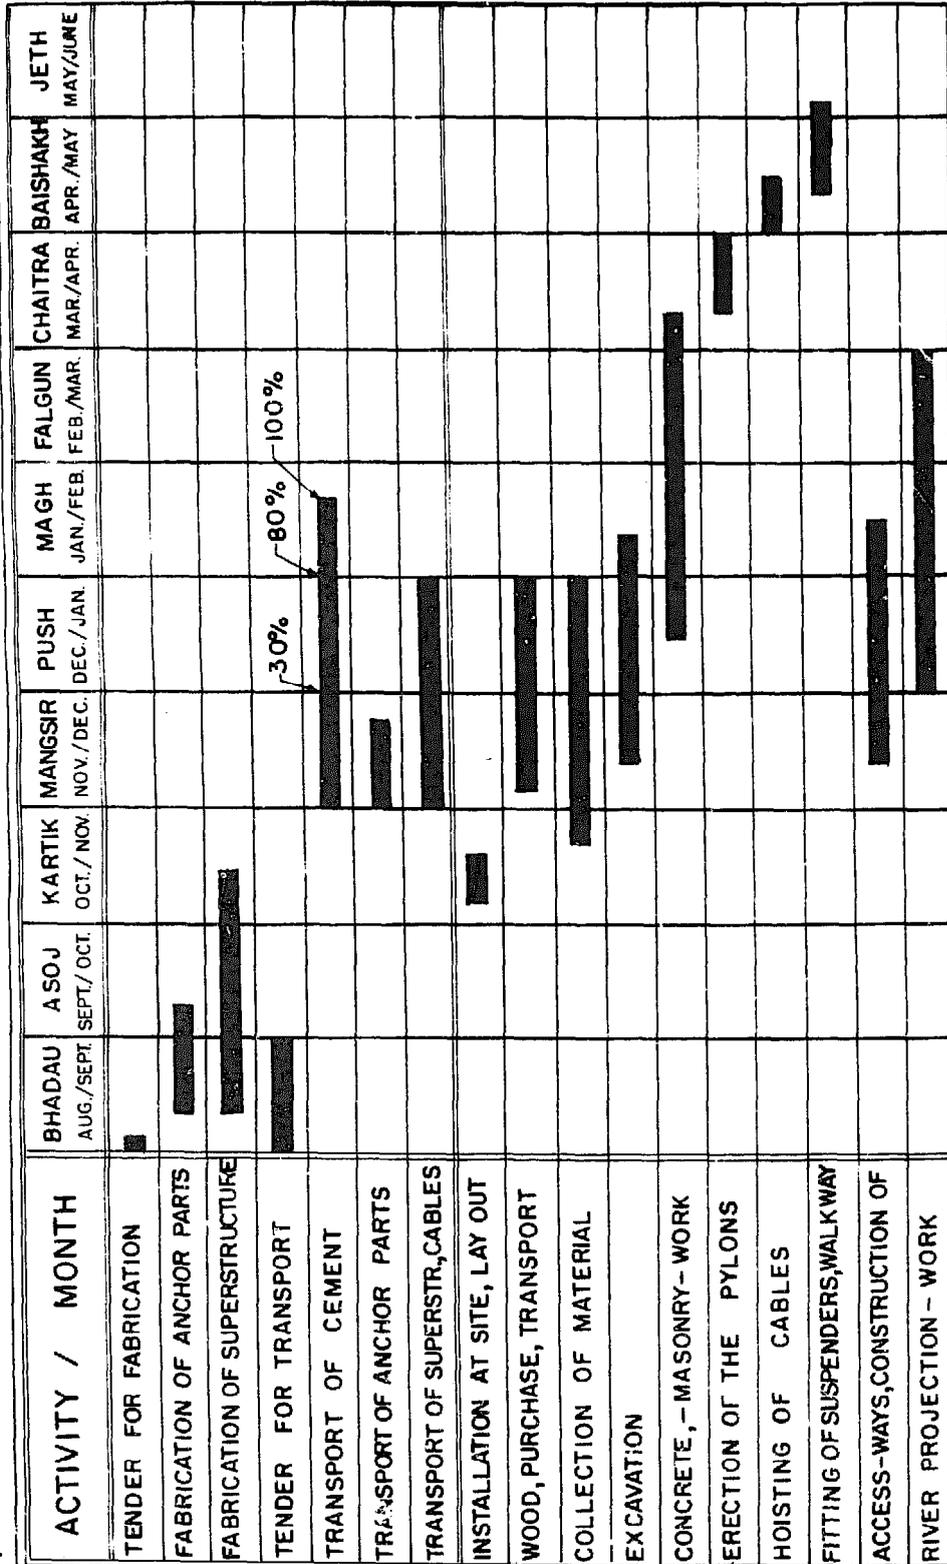

This is a rough schedule and will only give some hints for the preparation of such a program. For the whole project it should be worked out in more detail, e.g. the site-work divided in left-bank and right-bank, pylon foundation, main anchorage and windguy anchorage, preparation of deck-planks etc.....

Such a diagram shows activities which can be done simultaneously and also the influence of a delay in one activity (e.g. transport) on the whole construction-progress.

COST ESTIMATE FOR SUSPENSION BRIDGES

Item 1. Transportation to item 1.5.3 weight of camp equipment

No. : 7.201

Date : 22nd Dec. 76

Sig : *Asst. Engineer*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

The herewith given rate analysis is based on the "NORMS" for analysis of rate by HMG, Department of Roads (Quantity surveying branch) and on rates sanctioned in the Suspension Bridge Division. The following analysis should be used only while the general arrangement and the detail drawing of a certain project of a suspension bridge are taken into consideration. It must be said, that the following rates are taking care to the way of design work done by HMG Suspension Bridge Division. At the same moment it is important to mention, that the influence resulting from the HMG's standard has been considered.

1. TRANSPORTATION ESTIMATE CRITERIAS

1.1 Transportation by plane

The rates for this kind of transportation can be got from the Royal Nepal Airlines Corporation.

1.2 Transportation by truck

- Black top road : 0,00130 Rs. per kg per km
- Gravel and mud road : 0,00195 Rs. per kg per km
- River bank road : 0,00320 Rs. per kg per km

1.3 Transportation on porters back

- a porter walks 8 miles (13km) a day
- a porter carries 40kg easily steel parts and wooden planks
- a porter carries 50kg easily steel parts if the overall measurements are limited (1.25m in length)
- a porter carries 30kg of difficult parts -i.e. parts beyond 50kg and 1.25 m in length.
- a porter carries 20kg of cables
- wind-tie cables of $\phi \frac{1}{4}$ " (6,3mm) are estimated as easy steel parts
- cement bags of 50kg in weight are estimated as easy parts too.
- How many parts are to be estimated either as easy or difficult parts can be taken from the list in the general arrangement.

1.4 Loading and unloading

This amount varies on the conditions of the transportation for a certain bridge. The following assumption may be taken :

- 1.4.1 Transportation by plain : 35 Rs. per m span
- 1.4.2 Transportation by truck : 12 Rs. per m span
- 1.4.3 Transportation by porter : 3 Rs. per m span

1.5 Assumed weights of camp equipment etc.

This item varies on the different kind of work needed. The following weights may be taken as an average :

- 1.5.1 Spans 66 to 114m :
 - Store to bridge site : 1'600 kg
 - and back to store : 1'400 kg
- 1.5.2 Spans 115 to 174m:
 - Store to bridge site : 2'000 kg
 - and back to store : 1'700 kg
- 1.5.3 Spans 175 to m:
 - Store to bridge site : 3'100 kg
 - back to store (SBD) : 2'700 kg


COST ESTIMATE FOR SUSPENSION BRIDGES

Item 1.6 Equipment's weight for camp maintenance to
4. Purchase of goods for camp maintenance and execution

No. : 7.202

Date : 22nd Dec. 76

Sig :




His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

- 1.6 Assumed weights of equipment for camp maintenance and small materials for work execution .
7 kg per m span
- 1.7 Additional weight of equipment for rock drilling work
(Rock drilling machine, gridding machine for drill bits, drill bits, fuel container, helmet, vice, water pipe, repairing and maintenance tools etc.)
Assumption: 150 kg store to site
120 kg back to store of SBD (Roads Department)
2. CAMP ESTABLISHMENT
Area needed for a project : - 66 to 114 m span = 300 m² { 2 cement stores }
- 115 to 174 m span = 360 m² { 2 cement stores }
- 175 to 222 m span = 420 m² { 2 cement stores }
- 223 to ... m span = 500 m² { 3 cement stores }
Coolies Manday 6 Nos. per m²
3. CAMP MAINTENANCE
Material : Kerosene - oil : 54 Litres per month
First aid, different goods, batteries, lantern glasses, small materials etc. : 200 Rs. per month
Labour : Supervisor..... : 1 Nos. (except during rainy season)
Store keeper..... : 1 Nos.
Watchmen..... : 4 Nos.
4. PURCHASE OF GOODS FOR CAMP MAINTENANCE AND EXECUTION OF THE WORK
The amount of this item has not to be added to the estimated cost for a bridge site. The equipment can be used at more than one bridge site only. To purchase goods which is not available in the store of HMG Roads Department (Suspension Bridge Division) the amount of the 5 % contingencies is including these costs. The equipment must be brought back to the stores (refer also to rate analysis item 1.5) after completion of the work. Before taking the goods the drawings of HMG's standard design should be read, because many items are put into the steel part lists etc.

Description	Unit	spans in metres		
		66 - 114	115 - 174	175 - ...
Tent, double corner _____	pc. _____	2 _____	2 _____	2 _____
Camp cot, durable type _____	pc. _____	4 _____	5 _____	5 _____
Tarpaulin of different sizes _____	sq.ft. _____	750 _____	900 _____	1100 _____
Petromax with spare parts _____	pc. _____	2 _____	2 _____	2 _____
Lanterns _____	pc. _____	4 _____	6 _____	6 _____
Torches _____	pc. _____	4 _____	5 _____	6 _____
Camp tables _____	pc. _____	3 _____	3 _____	4 _____
Camp chairs _____	pc. _____	8 _____	8 _____	10 _____
Water filters _____	pc. _____	2 _____	2 _____	3 _____
Hand bags _____	pc. _____	2 _____	2 _____	2 _____
Cash boxes _____	pc. _____	1 _____	1 _____	1 _____
Survey umbrella _____	pc. _____	- _____	- _____	1 _____
Umbrellas _____	pc. _____	4 _____	5 _____	5 _____

COST ESTIMATE FOR SUSPENSION BRIDGES

4. Purchase of goods (continuation)

No. : 7.203

Date : 22nd. Dec. 76

Sig : *Ch. Prasad*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

4. Purchase of goods and equipment for execution work, continuation

Description	Unit	66 - 114	115 - 174	175 - ...
Kitchen utensils	set	1	1	1
Sleeping bags	pc.	1	1	1
Slide rule calculator	pc.	1	1	1
Theodolite (incl. stand)	pc.	1	1	1
Level (incl. staff)	pc.	1	1	1
Levelling staff	pc.	(1)	(1)	(1)
Tape, about 3m length	pc.	2	2	3
Tape, 20 to 30 m length	pc.	1	2	2
Spring balance, 50 kg capacity	pc.	1	2	1
Spring balance, 100 kg capacity	pc.	1	1	2
Weighing balance, 100 kg capacity	pc.	1	1	2
Shovels	pc.	15	20	30
Crow - bar ϕ 1 1/4"	pc.	5	8	15
Chisels, medium size	pc.	5	6	7
Hammer, small (0,5 kg)	pc.	30	40	50
Hammer, medium (5,0 kg)	pc.	6	8	10
Hammer, big (6,5 kg)	pc.	3	4	5
Mason's squares	pc.	2	2	3
Carpenter's level (spirit-level)	pc.	2	2	2
Plumb bob (plummet)	pc.	3	3	4
Screw jack (6" size)	pc.	1	1	1
Paint for marking (0,5 Litre)	tin	2	2	3
Buckets (20 Litres)	pc.	12	24	36
Fixation hook for pylon erection cable	pc.	4	6	8
Hack saw frame	pc.	2	2	3
Hack saw blades, best quality	doz.	1	1	2
Wood saws of different sizes	pc.	4	6	8
Auger ϕ 1/2" and 3/4"	doz.	1 1/2	2	2
Lay out frame of wooden planks	pc.	1	1	1
Files of different sizes (halfround, triangular, flat, full round)	set.	1	1	1
Die sets (1/2, 3/4, 5/8, 7/8, 1" threads)	set.	1	1	1
Tongs	pair.	3	3	4
Nippers (pliers)	pc.	2	3	3
Pincers	pair	2	2	2
Screw drivers of different sizes	set	1	1	1
Nylondori ϕ 1"	m	200	400	600
Manila rope ϕ 1"	m	140	240	340
Extrasteel wire cable for front and backstay during pylon erection ϕ 1 1/2"	m	200	320	350
Bulldog grips (1/2, 3/4, 5/8, 1, 1 1/2, 1 3/4")	pc.	24	24	24
Cable brakes for ϕ 1"	pc.	2	2	2
Cable brakes for ϕ 1 1/2"	pc.	2	2	2
Cable brakes for ϕ 1 3/4"	pc.	2	2	3
Pulleys (double for cable ϕ 1")	pc.	4	4	4
Chain pulleys, 2 tons capacity	pc.	1	1	2

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

No. : 7.204

4. Purchase of goods (end) to 6.2 Clearance after completion of execution work

Date : 22nd Dec. 76

Sig : *[Signature]*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

4. Purchase of goods and equipment for execution work, 2nd. continuation

Description	Unit	66 - 114	115 - 174	175 - ...
Tirfor machine (complete) 2,5 tons	set	3	-	-
Tirfor machine (complete) 5,2 tons	set	-	3	3
Rock anchorage for tirfor (Habegger)	set	(1)	(1)	(1)
Wrenches for nut and bolts $\phi \frac{1}{2}$ "	pc.	6	8	10
Wrenches for nut and bolts $\phi \frac{3}{4}$ "	pc.	5	7	9
Wrenches for nut and bolts $\phi \frac{3}{4}$ "	pc.	3	10	16
Wrenches for nut and bolts $\phi \frac{5}{8}$ "	pc.	14	24	24
Wrenches for nut and bolts $\phi \frac{7}{8}$ "	pc.	2	6	16
Wrenches for nut and bolts $\phi 1$ "	pc.	2	2	2
Wrenches for nut and bolts $\phi 1\frac{1}{2}$ "	pc.	2	2	2
Wrenches for nut and bolts $\phi 1\frac{1}{2}$ "	pc.	2	2	2
Wrenches for nut and bolts $\phi 40mm$	pc.	2	2	2
Wrenches of different other sizes	set.	1	1	1
C - Clamp	pc.	2	2	3
Blowers for black smith	pc.	1	1	2

Special equipment only if really required

- Blaster's pincers
- Rock drilling machine, griding machine for drill bits, drill bits of different length, fuel container, helmet, vice,
- Water pump with flexible pipes
- Water pipes etc.
- Cable car for temporary crossing

The total amount of the above items should not be added to the estimated cost of a proposed bridge. Most of the equipment can be taken from the SBD store and must be returned after completion of the bridge. The goods which cannot be taken from the SBD store will be purchased within the amount of 5% contingencies. The above list is a guideline for the preparation and should show the kind of goods and their approximative amount.

5. TEMPORARY CROSSING

- 5.1 Hire a boat per month
- 5.2 Boat Manday 4 Nos. in dry season (for large river only)
- 5.3 Temporary 'bridge': The span of a temporary crossing (i.e. length) is to take from the general arrangement. The length of a temporary bridge is never as long as for the proposed bridge.
Labour : Unskilled 5 Manday per m span of temporary bridge
Material : Take an assumption of about 25 Rs. per m length

6. SITE CLEARANCE

- 6.1 Clearance before starting of the execution work : L.S. about 300 to 800 Rs.
- 6.2 Clearance after completion, including collection of materials for preparation of auction (but without backfilling) : L.S. about 500 to 1400 Rs.

S.A.T.A., Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

No. : 7.205

7. Wood work to 9.1 Painting of wooden longitudinal planks

Date : 22nd Dec. 76

Sig : *A. S. Sharma*

His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

7. WOOD WORK FOR 1 m³

7.1 Sal wood for decking for 1 m³

Assuming 40 % wastage, total wood required 1.67 m³ (58,8928 cubic feet). The wastage remains at the wooden location - i.e. only one m³ must be transported to the bridge site. A porter carries 40 kg and walks 8 miles (13 km) a day. One m³ is about 900 kg in weight (sal wood). The planks must be sawed according to the standard drawings of HMG's standard bridge design. The lay out frame, supplied by SBD, must be used at the wooden location and the provided holes are to drill at the wooden location too.

Material : 1.67 m³ (58,8928 cubic feet) Royalty
Labour : 10 Manday Coolies for felling and dressing
35 Manday Coolies for helping etc.
9 Coolies for helping etc.
2 Manday Carpenter to drill holes etc.
22 1/2 Nos. of porters for transportation
T. & P. Lumpsum : 1/15th of the above labour

7.2 Salla wood for shuttering for 1 m³

Assuming 40 % wastage, total wood required = 1.67 m³ for 1 m³ sawed wood. The wastage remains at the wooden location. Only one m³ of salla wood must be carried to the bridge site. One m³ of salla wood is assumed with 800 kg per m³.

Material : 1.67 m³ (58,8928 cubic feet)
Labour : 10 Manday Coolies for felling and dressing
35 Manday Saw men to make planks and beams
9 Manday Coolies for helping etc.
20 Nos. of porters for transportation
T. & P. Lumpsum : 1/15th of the above labour

8. LONGITUDINAL FIBRE GLASS PLANKS FOR THE WALK - WAY

8.1 Longitudinal fibre glass planks can provide a usefull alternativ esolution for longitudinal planks. The rates may be got from the Balaju Yantra Shala, BYS, at the Industrial Estate Balaju (Kathmandu). This alternative kind of fibre glass planks are cheaper then wooden planks if the wooden location is creating a long and costly transportation. By comparing the different kind of planks, the coalter painting and fixation cost have also to be taken into account.

9. PAINTING OF WOOD USED AT THE WALK - WAY

9.1 Painting of wooden longitudinal planks per m span. Refer to standard walk - way drawing.

Material : 1.176 Litre Coalter paint
0.300 Litre Fuel
Labour : 0.3 Manday Painter
T. & P. Lumpsum : 1/20th of the above

COST ESTIMATE FOR SUSPENSION BRIDGES

10. Excavation work to 10.7 Foundation excavation in dry hard rock

No. : 7.206

Date : 22nd Dec. 76

Sig

Ch. Prasad



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

10. EXCAVATION WORK
(Based on 'Norms' of rate analysis by HMG, Roads Department)
- 10.1 Excavation of top soil and carrying away from the foundation areas (thickness 15 - 20 cm) per SQ.M. (m²)
Labour : Manday 0.40 (Unskilled)
- 10.2 Excavation of common material, haulage distance 10 metres and disposal per CU.M. (m³)
If the above item (10.1) has been taken the volume of the excavation must be calculated in such a way, that the item 10.1 is taken into account.
Labour : Manday 0.80 (Unskilled)
- 10.3 Excavation of soft rock material, requiring use of crowbar, haulage distance 10 m and disposal (take reference to item 10.1) per CU.M. (m³)
Labour : Manday 2.00 (Unskilled)
- 10.4 Excavation - drilling & blasting - hard rock material, haulage distance 10 m and disposal per CU.M. (m³)
Material : Gelatine 0.25 kg
Detonator 2.00 pc.
Fuse wire 2.00 m
Labour : Manday 3.59 (Unskilled)
Manday 0.05 (Blaster)
- 10.5 Foundation excavation in dry common material - vertical lift 1 m, horizontal haulage distance 10 m and disposal per CU.M. (m³)
If you have used the item 10.1 please take the reduction due to that position into reference by estimating the volumes.
Labour : Manday 1.34 (Unskilled)
Vertical lift : for each additional lift per CU.M. (m³) per 1 m height
Labour : Manday 0.30 (Unskilled)
- 10.6 Foundation excavation in dry soft rock material, vertical lift 1 m, horizontal haulage distance 10 m and disposal per CU.M. (m³)
Labour : Manday 2.50 (Unskilled)
Vertical lift : for each additional lift per CU.M. (m³) per 1 m height
Labour : Manday 0.40 (Unskilled)
- 10.7 Foundation Excavation in dry hard rock, material, drilling and blasting, vertical lift 1 m, horizontal haulage distance 10 m and disposal per CU.M. (m³)
Material : Gelatine 0.25 kg
Detonator 2.00 pc.
Fuse wire 2.00 m

S.A.T.A., Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

10.7 continuation to 11.1.3 Gabion of size 2 x 1 x 0.5 m

No. : 7.207

Date : 22nd Dec. 76

Sig :




His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

10.7 Continuation

Labour : Manday 4.76 (Unskilled)
Manday 0.05 (Blaster)

Vertical lift : for each additional lift per CU.M. (m³) per m hight

Labour : Manday 0.40 (Unskilled)

10.8 Foundation excavation in shallow water, common material, vertical lift 1 m, horizontal haulage distance 10 m and disposal per CU.M. (m³)
This position may be used on the middle piers for multiple span suspension bridges etc. .

Labour : Manday 2.25 (Unskilled)

Vertical lift : for each additional lift per CU.M. (m³) per m hight

10.9 Bottom trimming of rock foundation pit and clearance per SQ.M. (m²)
(refer to detail drawings carefully)

Labour : Manday 0.61 (Unskilled)

11. FABRICATION OF GABION (Based on NORMS by HMG, Roads Department)

11.1 Fabrication of gabion including rolling, cutting and weaving complete.

Mesh size : 80 x 100 mm

Mesh wire : 9 SWG

Selvedge wire: 6 SWG

11.1.1 Box size 2 m x 1 m x 1 m

Material : G.I. Wire 36.00 kg
Selvedge wire 3.75 kg

Labour : Manday 2.42 (Skilled)
Manday 1.21 (Unskilled)

11.1.2 Box size 3 m x 1 m x 1 m

Material : G.I. Wire 52.35 kg
Selvedge wire 4.85 kg

Labour : Manday 3.52 (Skilled)
Manday 1.76 (Unskilled)

11.1.3 Box size 2 m x 1 m x 0.5 m

Material : G.I. Wire 24.55 kg
Sevedge wire 3.00 kg

Labour : Manday 1.650 (Skilled)
Manday 0.825 (Unskilled)

GOST ESTIMATE FOR SUSPENSION BRIDGES

No. : 7.208

11.1.4 Gabion box of size 3 x 1 x 0.5 m to 13. Filling of sand, stones, boulders etc. in cell-type foundation

Date : 22nd Dec. 76

Sig :

C. M. Subramanian



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

- 11.1.4 Boxe size 3 m x 1 m x 0.5 m
- Material : G.I. Wire 36.00 kg
Selvedge wire 3.90 kg
- Labour : Manday 2.42 (Skilled)
Manday 1.21 (Unskilled)
- 11.2 Assemble gabion, place in position including stretching, wiring the gabion together and tying down lids. Analys per box (piece)
Binding wire : 11 S.W.G.
- 11.2.1 Box size 2 m x 1 m x 1 m
- Material : Binding wire 1.15 kg
- Labour : Manday 0.40 (Unskilled)
- 11.2.2 Box size 3 m x 1 m x 1 m
- Material : Binding wire 1.60 kg
- Labour : Manday 0.60 (Unskilled)
- 11.2.3 Boxe size 2 m x 1 m x 0.5 m
- Material : Binding wire 0.90 kg
- Labour : Manday 0.20 (Unskilled)
- 11.2.4 Boxe size 3 m x 1 m x 0.5 m
- Material : Binding wire 1.20 kg
- Labour : Manday 0.30 (Unskilled)
12. FILLING OF STONES IN GABION CRATES PER CU.M. (m³) based on 'NORMS' by HMG R.D.
Collection of rubble of required size, haulage distance 10 m, partly stacking, filling in gabion crates per CU.M. (m³)
Collection of rubble, stones etc.
- Labour : Manday 0.70 (Unskilled)
- Filling in gabion crates
- Labour : Manday 0.80 (Unskilled)
- Additional cost for additional haulage for every 10 m more:
- Labour : Manday 0.16 (Unskilled)
13. FILLING OF SAND, STONES, BOULDERS, ROCK PIECES ETC. IN CELL - TYPE FOUNDATION INCLUDING COMPACTING PER CU. M. (m³)
The excavation material which lies around the foundation should be used.
- Labour : Manday 0.60 (Unskilled)

COST ESTIMATE FOR SUSPENSION BRIDGES

14. Collection of materials to 14.3.3 Size 5 to 20 mm

No. : 7.209

Date : 22nd Dec. 76

Sig : *C. Shrestha*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

14. COLLECTION OF MATERIALS

Based on NORMS by HMG Department of Roads

14.1 Collection of rubble of required size, haulage distance 10 m and stacking
What are rubbles ? bits of broken stones, rock or brickwork, stones from
a river bed, coarse gravel (30 to 55 mm) e.g. build a
road with a foundation of rubble

Collection of rubble of required size per CU.M. (m³)

Labour : Manday 0.70 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.16 (Unskilled)

14.2 Collection of stones, gravel including selection, screening and stacking
within 10 m haulage distance per CU.M. (m³)

14.2.1 Size 40 to 70 mm

Collection of stones and gravel etc. per m³

Labour : Manday 5.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.16 (Unskilled)

14.2.2 Size 70 to 100 mm

Collection of stones and gravel etc. per m³

Labour : Manday 4.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.16 (Unskilled)

14.3 Collection and sieving gravel including stacking within 10 m haulage per CU.M.

14.3.1 Size 5 to 70 mm

Collection, sieving and stacking per one cubicmetre

Labour : Manday 2.5 (Unskilled)

Additional work for extra haulage per 10m per one cubicmetre

Labour : Manday 0.16 (Unskilled)

14.3.2 Size 5 to 40 mm

Collection, sieving and stacking per CU.M. (m³)

Labour : Manday 4.0 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.16 (Unskilled)

14.3.3 Size 5 to 20 mm

Collection, sieving and stacking per CU.M. (m³)

Labour : Manday 5.88 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.16 (Unskilled)

SAT A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

14.3.4 Size 5 to 8 mm to 14.5.4 Making sand by crushing of stones

No. : 7.210

Date : 22nd Dec. 76

Sig : *C. S. Prasad*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

14.3 Continuation

14.3.4 Size 5 to 8 mm

Collection, sieving and stacking per CU.M. (m³)

Labour : Manday 10.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.16 (Unskilled)

14.4 Collection and sieving fine sand within 10 m haulage distance per CU.M. (m³)

14.4.1 Collection and sieving sand in hill areas, haulage distance 10 m per CU.M. (m³)

Labour : Manday 1.49 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

14.5 Breacking stones including collection, sieving and stacking within 10 m haulage per CU.M. (m³)

14.5.1 Size 40 to 70 mm

Collection, breacking, sieving etc.

Labour : Manday 8.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

14.5.2 Size 20 to 40 mm

Collection, breacking, sieving etc.

Labour : Manday 12.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

14.5.3 Size 10 to 20 mm

Collection, breacking, sieving etc.

Labour : Manday 18.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

14.5.4 Making sand by crushing of stones per CU.M. (m³)

If the sand location is quite far from the site, the crushing of stones to get sand might be the cheaper way. A carefull comparison should be made. This rate is sanctioned by the Suspension Bridge Division.

Crushing of stones to get sand including collection, sieving and stacking within 10 m haulage distance per CU.M.

Labour : Manday 35.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

SAT A, Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

No. : 7.211

15. Dry rubble masonry to 16.3 Stone dressing

Date : 22nd Dec. 76

Sig : *C. M. Prasad*

His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

15. DRY RUBBLE MASONRY PER CU.M.
(Based on 'NORMS' by HMG Roads Department)

15.1 Providing and lying dry rubble masonry of hard block stones, height of masoned body up to five metres and haulage distance within 30 metres per CU.M. (m³)

Collection of rubble refer to item 14.1

Material :	rubble	1.10	m ³
Labour :	Manday	3.50	(Unskilled)

16. R.R. MASONRY IN CEMENT MORTAR PER CU.M.
(Based on rates sanctioned in SBD)

16.1 R.R. Masonry in cement mortar 1 : 4 per CU.M.

This item should only be used below the known high flood level at the pylon and pier foundation for single and multiple span suspension bridges. This kind of masonry work is not allowed for wind guy blocks and main anchor blocks. The detail drawings and general arrangement have to be taken into consideration.

Material :	Rubble	1.25	m ³
	Sand	0.34	m ³
	Cement	2.55	bags of 50 kg in weight

Labour :	Manday	0.10	(Head Mason)
	Manday	2.00	(Mason)
	Manday	3.20	(Unskilled)
	Manday	0.20	(Waterman)

Scaffolding : 1/30th of the above labour

T. & P. Lumpsum : 1/20th of the above labour only

16.2 R.R. Masonry in cement mortar 1 : 6 per CU.M.

Material :	Rubble	1.25	m ³
	Sand	0.42	m ³
	Cement	2.10	bags of 50 kg in weight

Labour :	Manday	0.10	(Head Mason)
	Manday	2.00	(Mason)
	Manday	3.20	(Unskilled)
	Manday	0.20	(Waterman)

Scaffolding : 1/30th of the above labour

T. & P. Lumpsum : 1/20th of the above labour only

16.3 Stone Dressing per CU.M.

This position is actually not necessary for suspension and suspended bridge project by the design section of SBD of HMG Roads Department.

COST ESTIMATE FOR SUSPENSION BRIDGES

17. Concrete work to 17.4 Mass concrete 1 : 2 : 4

No. : 7.212

Date : 22nd Dec. 76

Sig : *C. P. Sharma*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

17. CONCRETE WORK PER CU.M. (Based on rates sanctioned in SBD)

17.1 Lean concrete 1 : 4 : 8 per CU.M. (m³)
Only used as granular sub grade about 5 to 7 cm thick.

Material :	Aggregate	0.90	m ³
	Sand	0.45	m ³
	Cement	3.30	bags of 50 kg in weight
Labour :	Manday	0.10	Head Mason
	Manday	0.70	Mason
	Manday	1.20	Waterman
	Manday	7.20	Unskilled

T. & P. Lumpsum : 1/20th of the above labour only

17.2 Plum concrete consists of 60 % mass concrete and 40 % boulders and rubbles or hard rock pieces per CU.M. (m³)

Material :	Aggregate	0.528	m ³
	Rubble, etc.	0.500	m ³
	Sand	0.264	m ³
	Cement	2.58 2.58	bags of 50 kg in weight
Labour :	Manday	0.60	Head Mason
	Manday	0.40	Mason
	Manday	0.70	Waterman
	Manday	4.30	Unskilled
	Manday	0.25	Unskilled (Washing rubble, based on 'NORMS')
	Manday	1.75	Unskilled (Providing and laying rubble with- in a haulage distance up to 30 m)

T. & P. Lumpsum : 1/20th of the above labour only

17.3 Mass concrete 1 : 3 : 6 per CU.M. (m³)

Material :	Aggregate	0.88	m ³
	Sand	0.44	m ³
	Cement	4.30	bags of 50 kg in weight
Labour :	Manday	0.10	Head Mason
	Manday	0.70	Mason
	Manday	1.20	Waterman
	Manday	7.20	Unskilled

T. & P. Lumpsum : 1/20th of the above labour

17.4 Mass concrete 1 : 2 : 4 per CU.M. (m³)
Refer to detail drawings because this kind of concrete is only used in small quantities at the top of the pylon foundation.

Material :	Aggregate	0.88	m ³
	Sand	0.44	m ³
	Cement	6.60	bags of 50 kg in weight

SAT A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES
17.4 continuation to 21. Backfilling work

No. : 7.213

Date : 22nd Dec. 76

Sig : *M. J. Manand*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

17.4 Mass concrete 1 : 2 : 4 per CU.M. (continuation)

Labour : Manday 0.10 Head Mason
Manday 0.70 Mason
Manday 1.20 Waterman
Manday 7.20 Unskilled

T. & P. Lumpsum : 1/20th of the above labour only

18. SHUTTERING PER ONE SQ.M. (m²) (Based on rates sanctioned in SBD)
For the foundation used at suspension and suspended bridges is no need of centering work. The shuttering faces are always vertical and plain. Please refer to the general arrangement and detail drawing of the Suspension Bridge Division of HMG Roads Department. For the cost of the needed wood refer to coat item 7.2 (Salla wood for Shuttering). But for the shuttering work of foundation designed for suspended and suspension bridges the longitudinal wooden planks of the walk - way can be used for the wooden form work without wastage the planks too.

Material : Nails 0.03 kg
Labour : Manday 0.10 Carpenter
Manday 0.10 Unskilled

T. & P. Lumpsum : 1/15th of the above labour only

19. PLACING OF REINFORCEMENT IN CEMENT CONCRETE WORK PER 100 KG (kg)
The reinforcement steel for suspension and suspended bridges is rather simple and a easy design. There are easy bending form (only streight with hooks at their ends) or U-forms for starter bars.

Material : Reinforcement 100 kg (it may supplied by SBD/SATA)
Binding wire 0.50 kg
Labour : Manday 3 Black smith
Manday 4 Unskilled

T. & P. Lumpsum : 1/20th of the above labour only

20. CEMENT PLASTER WORK 12 mm thick per SQ.M. (m²) (Based on SBD rates)
Cement plaster is normally not used at suspension and suspended bridges. The general arrangement and the detail drawings should be taken into reference.

Material : Sand 0.016 m³
Cement 0.12 bags og 50 kg in weight
Labour : Manday 0.250 Mason
Manday 0.333 Unskilled

T. & P. Lumpsum 1/20th of above labour only

21. BACKFILLING WORK PER CU.M. (Based on rates sanctioned in SBD)
The backfilling work should be done at each foundation to protect the blocks against erosion and sliding. The passive earth pressure is also taken into account by the calculated safety factors of the foundation. The excavation material laying around the foundation must be used and the backfilling should be done proper and compacted as much as possible.

Labour : Manday 0.50 Unskilled

COST ESTIMATE FOR SUSPENSION BRIDGES

21. Placing of anchorage parts to 21.6 Placing of anchorage parts in rock foundation type

No. : 7.214

Date : 22nd Dec. 76

Sig :

C. H. Shrestha



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

21. PLACING OF ANCHORAGE PARTS FOR SUSPENSION BRIDGES PER UNIT AT ONE SIDE
(Based on rates sanctioned by the Suspension Bridge Division of HMG Roads Department)

21.1 Main cable anchorage for one anchorage block at one river side

If a multiple span has to be estimated the length of the middle span should be taken into reference.

Span in metres	66 - 78	90 - 150	162 - 222 m
Fitter (Manday)	2	3	4
Unskilled (Manday)	6	9	12

21.2 Pylon and walk - way anchorage for one foundation at one river side

If a multiple span bridge has to be estimated the span in the middle should be taken.

Span in metres	66 - 78	90 - 150	162 - 222 m
Fitter (Manday)	1.8	2.2	3.4
Unskilled (Manday)	6.0	7.0	11.0

21.3 Placing of standard wind - guy anchorage per anchor block - i.e. cable end. Please refer to standard lay out drawing, general arrangement and detail drawings of the wind guy blocks etc.

Cable ϕ in inch (")	ϕ 1" (25mm)	ϕ 1½" (32mm)	ϕ 1¾" (38mm)
Fitter (Manday)	0.30	0.60	0.80
Unskilled (Manday)	0.30	0.90	1.40

21.4 Placing of standard side stay cable anchorage hook per unit - i.e. cable end. Up to the span 150 metres there are no side stay cable provided. If there will be a special case the rate for spans from 162 to 198 m may be taken. For multiple spans take the middle span.

Spans in metres	162 to 198	210 - 222 m
Fitter (Manday)	0.50	0.60
Unskilled (Manday)	0.50	0.70

21.5 Placing of anchorage hook for front and back stay cable including turn-buckle to take up the pre-tension. For the back stay cable the hook at the main anchor block (hoisting hook) should be used. The rate is estimated for one river side. For multiple spans take the middle span.

Spans in metres	66 - 114	126 - 174	210 - 222 m
Fitter (Manday)	1.20	1.80	2.40
Unskilled (Manday)	1.20	1.80	2.40

21.6 Placing of anchorage parts in rock anchor foundation types, tunnel or drilled holes in a hard and sound rock per anchorage unit. Take four times the above rates (items 21.1 to 21.5) which are confirmed to the span or cable ϕ .

ESTIMATE FOR SUSPENSION BRIDGES

22. Pylon erection and scaffolding to 22.2 pylon erection

No. : 7.215

Date : 22nd Dec. 76

Sig : *C. Shrestha*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

22. PYLON ERECTION AND SCAFFOLDING PER M HIGHT OF ONE PYLON

(Based on rates sanctioned by the suspension bridge division of HMG Roads Department)

Some usefull information :

Span in metre (or middle span)	Height of the pylons in metres
66 m	11.00 m
78 m	12.80 m
90 m	14.70 m
102 m	16.50 m
114 m	18.30 m
126 m	18.30 m
138 m	21.90 m
150 m	21.90 m
162 m	25.50 m
174 m	25.50 m
186 m	29.10 m
198 m	29.10 m
210 m	32.70 m
222 m	32.70 m

22.1 Scaffolding of pylon for each 4 metres height

Material : Bamboo 50 Nos. (1st Pylon).... 15 Nos. (2nd Pylon)
Nariwal dori 12 kg

Labour : Manday 2 Carpenter 2 Carpenter
Manday 12 Unskilled 12 Unskilled

Transportation : Up to 2 miles ; coolies per bamboo = 0.25
Up to 4 miles ; coolies per bamboo = 0.50
Up to 8 miles ; coolies per bamboo = 1.00

The costs of the scaffolding for the second pylon will be cheaper, because most of the bamboos can be used twice. Take an assumption that 70 % of the bamboos can be used ones again for the second pylon. Therefore only 15 bamboos must be brought to the bridge site for the second pylon for each four metres height.

22.2 Pylon erection and lifting arrangement per m pylon height including fixation of front and back stay cables during assembling work.

Labour : Manday 1.50 Fitter
Manday 8.00 Unskilled

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

No. : 7.216

23. Cable hoisting to 23.3 hoisting of spanning cable

Date : 22nd Dec. 76

Sig :

C.M. Indurani



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

23. CABLE HOISTING FOR SUSPENSION BRIDGES
(Based on rates sanctioned in SBD)

23.1 Hoisting of side stay cables per m length. (m1)
Please refer to general arrangement and detail drawings.
For bridge spans up and including 150 m there are no side stay cables provided. For multiple spans take the middle span.

Span in metres 162 - 198 m 210 - 222 m

Fitter	(Manday)	0.08	0.09
Unskilled	(Manday)	0.40	0.50

In the above figures the labour to take up the pre-tension (2 tons rsp. 2.5 tons) is included.

23.2 Hoisting of main cable per m span (m1/span) for one main cable only
The diametres are according to HMG'S standard design. Refer also to chapter 2.5 (Standard design for suspension bridges).

Spans in metres	Fitter (Manday)	Unskilled (Manday)
66 m	0.15	0.90
78 m	0.15	0.90
90 m	0.10	0.60
102 m	0.10	0.60
114 m	0.15	0.90
126 m	0.15	0.90
138 m	0.15	0.90
150 m	0.15	0.90
162 m	0.10	0.60
174 m	0.15	0.90
186 m	0.15	0.90
198 m	0.15	0.90
210 m	0.15	0.90
222 m	0.15	0.90

For multiple span bridges take the rate per m span from the span of the standard middle span.

Noteworth : Fitter (Manday) and Unskilled (Manday) are given per m span for one cable only. Hoisting sag refer to general arrangement and chapter 2.5 (Standard design)

23.3 Hoisting of spanning cable per m span for one cable only
In the following rates the work to take up the pre-tension is included. There are turn - buckles provided for each cable and separately and they should be opened before hoisting the spanning cables. The cable ϕ arc according to HMG'S standard Design.

Spans in metres	Fitter (Manday)	Unskilled (Manday)
66 to 102 m (3t)	0.07	0.45
114 to 150 m (4t)	0.08	0.55
126 to 186 m (5t)	0.08	0.60
198 to 222 m (6t)	0.12	0.72

For multiple span take the rate for the middle standard span.

SAT A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

No. : 7.217

23.4 Hoisting of wind-guy cables to 24.1 Erection of suspenders, cross beam, bracing flats etc. per m length of the bridge

Date : 22nd Dec. 76

Sig :

C. M. Anand



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

23.4 Hoisting of the wind - guy cables per m span of the wind-guy cable

The span of the wind - guy cable is often not the same as the span of the bridge. Please take the correct span from the general arrangement. The distance between the wind tie cables ($\phi \frac{1}{4}$ ") is 3.60 m according to HMG Standardization. In the general arrangement the real distances between the wind - tie clamps should be given. To mark e.g. with paint where the wind tie clamps should be placed is also included in the following rates. The wind guy cables should be pretensioned. To take up this force on each cable end turn buckles etc. are provided. Before starting the hoisting work those turn-buckles must be wide opened.

ϕ of wind-guy cable	Fitter (Manday)	Unskilled (Manday)
$\phi 1$ " (25 mm).....	0.10.....	0.60
$\phi 1\frac{1}{4}$ " (32 mm).....	0.12.....	0.75
$\phi 1\frac{1}{2}$ " (38 mm).....	0.15.....	0.90

23.5 Hoisting and fixation of the wind ties $\phi 1/4$ " per piece.

The numbers of wind ties can be taken from the general arrangement. The wind - ties are provided every 3.60 m according to the standard design. Sometimes the wind anchor blocks are placed either in front or back the pylon foundation center line - i.e. the number of wind ties varies.

Labour per wind tie (piece) :	Fitter	0.15	(Manday)
	Unskilled	0.15	(Manday)

The above labour includes the time needed for the fixation on the cross beam of the walk - way (Gangway)

23.6 Fitting of fixation and hand rail cables per m span of the bridge.

This work can be estimated per m length of the bridge, because the Standard design of the suspension bridges shows two hand rail and two fixation cable for each bridge. The hoisting for these four cables is very easy because this work will be done after erection of the walk way.

Labour	:	Manday	0.08	Fitter
		Manday	0.12	Unskilled

24. ERECTION OF THE WALK - WAY PER M SPAN (LENGTH)
(Based on rates sanctioned in SBD)

24.1 Erection of the suspenders, cross beams, wind bracing flats etc. per m length of the bridge.

The standard design of HMG Roads Department (Suspension Bridge Division) shows for all suspension bridges the same walk - way. Because of that the assembling work can be standardized.

Labour	:	Manday	1.50	Fitter
		Manday	2.25	Unskilled

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

No : 7.218

24.2 Fitting of longitudinal planks to 25.1 Painting of steel construction per m pylon height

Date : 22nd Dec. 76

Sig : *[Signature]*



His Majesty's Government
 Ministry of Public Works & Transport
 ROADS DEPARTMENT

Suspension Bridge Division

24.2 Fitting of longitudinal planks to the cross beams of the walk-way per m length of the bridge.

In this connection refer also to the item 7.1 (Sal wood for longitudinal wooden planks) and item 8.1 (Fibre glass longitudinal planks). The coalter painting of the wooden planks is included in the item 9.1 (Painting of wooden longitudinal planks).

24.2.1 Fitting of wooden longitudinal planks per m length of the bridge (bolts and nuts are supplied by the workshop)

Labour : Manday 0.30 Fitter
 Manday 0.40 Unskilled

24.2.2 Fitting of fibre-glass longitudinal planks per m length of the bridge (Bolts and nuts are supplied by the workshop)

Labour : Manday 0.20 Fitter
 Manday 0.10 Unskilled

24.3 Fitting of wire-mesh netting per m length of the bridge

Material : Bending wire 0.05 kg
 Labour : Manday 0.05 Fitter
 Manday 0.25 Unskilled

24.4 Loading and unloading of the bridge

This work should be done at each bridge to take up the pretension in the spanning cable. The Standard design provides for each cable end one turn-buckle. The turn-buckles are to open before hoisting the spanning cables (refer also to item 23.3 Hoisting of spanning cable).

Span of the bridge Labour (Manday)
 (or length) Unskilled

66 - 126 m 5

127 - 222 m 10

223 - ... m 13

25. FINISHING WORK

25.1 Painting of the steel construction per m pylon height.

The workshop will deliver the steel part two times painted. Due to transportation some re-painting work may be necessary. This work is only to do at the pylons. Take care to the kind of paint used

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENSION BRIDGES

No. : 7.219

25.1 Painting work (continuation) to 25.3 Retightening of cable clamps, bulldog grips, take up bolts and lock nuts of turn buckles etc.

Date : 22nd Dec. 76

Sig :

C. B. Pradhan



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

25.1 Painting work (continuation)

by the workshop. It is assumed that 0.50 m² per m pylon height must be repainted.

Material : Paint 0.05 litre per m pylon height
Labour : Manday 0.07 Painter per m pylon height
Manday 0.05 Unskilled labour per m pylon height

25.2 Maintain of the threads of the anchor bars for the main and wind guy cable per cable end.

Labour : Manday 0.15 Fitter per cable end

25.3 Retightening of the cable clamps, bulldog grips, take up bolts and lock nuts of the turn buckles etc.

Span or length of the bridge Fitter (Manday)

66	-	126 m	4
127	-	222 m	6
223	-	... m	8

For the estimate work of a suspended bridge (bridge without pylons) please refer to chapter 7.2 Cost estimate for a suspended bridge.

Noteworth : There are different kind of material etc. needed for many of the items of this rate analysis for the cost estimates of standard suspension bridges. The site in charge should work out a list of the goods to be purchased but he should note, that the costs are already included in the rate analysis.

As a guide line at the following items are materials included :
(Except items 1.6, 1.7, 2., 3. and 4.)

- | | |
|---------------------------------------|--|
| 9.1 : Coalter paint and fuel | 10.4 : Gelatine, detonator, fuse wire |
| 10.7 : Gelatine, Detonator, fuse wire | 11. G.I. wire, selvedge wire |
| 16. : Cement bags | 17. : Cement bags |
| 18. : Nails | 19. : Reinforcement rods, binding wire |
| 20. : Cement | 22.1 : Nariwal dori |
| 24.3: Bending wire | 25.1 : Paint for pylon (repainting) |

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENION AND SUSPENDED BRIDGES

No. : 7.220

Photos shown the work execution

Date : 1st March 77

Sig : *[Signature]*



SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

COST ESTIMATE FOR SUSPENDED BRIDGE

Item 1. Transportation to item 1.5.4 weight of camp equipment

No. : 7.221

Date : 18th Jan. 77

Sig : *[Signature]*

His Majesty's Government
 Ministry of Public Works & Transport
 ROADS DEPARTMENT

Suspension Bridge Division

The herewith given rate analysis is based on the "NORMS" for analysis of rate by HMG, Department of Roads (Quantity surveying branch) and on rates sanctioned in the Suspension Bridge Division. The following analysis should be used only while the general arrangement and the detail drawing of a certain project of a suspended bridge are taken into consideration. It must be said, that the following rates are taking care to the way of design work done by HMG Suspension Bridge Division. At the same moment it is important to mention, that the influence resulting from the HMG's standard has been considered.

1. TRANSPORTATION ESTIMATE CRITERIAS

1.1 Transportation by plane

The rates for this kind of transportation can be got from the Royal Nepal Airlines Corporation.

1.2 Transportation by truck

- Black top road : 0,00130 Rs. per kg per km
- Gravel and mud road : 0,00195 Rs. per kg per km
- River bank road : 0,00320 Rs. per kg per km

1.3 Transportation on porters back

- a porter walks 8 miles (13km) a day
- a porter carries 40kg easily steel parts and wooden planks
- a porter carries 50kg easily steel parts if the overall measurements are limited (1.25m in length)
- a porter carries 30kg of difficult parts -i.e. parts beyond 50kg and 1.25 m in length.
- a porter carries 20kg of cables
- wind-tie cables of $\phi \frac{1}{4}$ " (6,3mm) are estimated as easy steel parts
- cement bags of 50kg in weight are estimated as easy parts too.
- How many parts are to be estimated either as easy or difficult parts can be taken from the list in the general arrangement.

1.4 Loading and unloading

This amount varies on the conditions of the transportation for a certain bridge. The following assumption may be taken :

- 1.4.1 Transportation by plain : 30 Rs. per m span
- 1.4.2 Transportation by truck : 10 Rs. per m span
- 1.4.3 Transportation by porter : 2 Rs. per m span

1.5 Assumed weights of camp equipment etc.

This item varies on the different kind of work needed. The following weights may be taken as an average :

- 1.5.1 Spans 39 to 60m :
 - Store to bridge site : 1'000 kg
 - and back to store : 850 kg
- 1.5.2 Spans 63 to 87m :
 - Store to bridge site : 1'150 kg
 - and back to store : 950 kg
- 1.5.3 Spans 90 to 126m :
 - Store to bridge site : 1'500 kg
 - and back to store : 1'300 kg
- 1.5.4 Spans beyond 126m :
 - Store to bridge site : 1'600 kg
 - and back to store : 1'400 kg

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

COST ESTIMATE FOR SUSPENDED BRIDGES

No. : 7.222

Item 1.6 Equipment's weight for camp maintenance to
4. Purchase of goods for camp maintenance and execution

Date : 18th Jan. 77

Sig : *C. M. J. ...*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

- 1.6 Assumed weights of equipment for camp maintenance and small materials for work execution .
6 kg per m span
- 1.7 Additional weight of equipment for rock drilling work
(Rock drilling machine, gridding machine for drill bits, drill bits, fuel container, helmet, vice, water pipe, repairing and maintenance tools etc.)
Assumption: 150 kg store to site
120 kg back to store of SBD (Roads Department)

2. CAMP ESTABLISHMENT

- Area needed for a project : - 39 to 60 m span = 170 m2 (1 cement store)
- 63 to 87 m span = 250 m2 (2 cement stores)
- 90 to 126 m span = 320 m2 (2 cement stores)
- 127 to ... m span = 390 m2 (2 cement stores)

Coolies: Manday 6 Nos. per m2

3. CAMP MAINTENANCE

- Material : Kerosene - oil : 54 Litres per month
First aid, different goods, batteries, lantern glasses, small materials etc. : 200 Rs. per month
- Labour : Supervisor..... : 1 Nos. (except during rainy season)
Store keeper..... : 1 Nos.
Watchmen..... : 4 Nos.

4. PURCHASE OF GOODS FOR CAMP MAINTENANCE AND EXECUTION OF THE WORK

The amount of this item has not to be added to the estimated cost for a bridge site. The equipment can be used at more then one bridge site only. To purchase goods which is not available in the store of HMG Roads Department (Suspension Bridge Division) the amount of the 5 % contingencies is including these costs. The equipment must be brought back to the stores (refer also to rate analysis item 1.5) after completion of the work. Befor taking the goods the drawings of HMG's standard design should be read, because many items are put into the steelpartlists etc.

Description	Unit	spans in metres		
		39 - 60	63 - 87	90 - ...
Tent, double corner	pc.	1	2	2
Camp cot, durable type	pc.	3	4	4
Tarpaulin of different sizes	sq.ft.	450	680	1000
Petromax with spare parts	pc.	2	2	2
Lanterns	pc.	3	4	4
Torches	pc.	4	4	5
Camp tables	pc.	3	3	3
Camp chairs	pc.	8	8	8
Water filters	pc.	2	2	2
Hand bags	pc.	2	2	2
Cash boxes	pc.	1	1	1
Survey umbrella	pc.	-	-	1
Umbrellas	pc.	3	3	4

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENDED BRIDGES

4. Purchase of goods (continuation)

No. : 7.223

Date : 18th Jan. 77

Sig : *[Signature]*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

4. Purchase of goods and equipment for execution work, continuation

Description	Unit	39 - 60	63 - 87	90 - ...
Kitchen utensils	set	1	1	1
Sleeping bags	pc.	1	1	1
Slide rule calculator	pc.	1	1	1
Theodolite (incl. stand)	pc.	1	1	1
Level (incl. staff)	pc.	1	1	1
Levelling staff	pc.	(1)	(1)	(1)
Tape, about 3m length	pc.	2	2	2
Tape, 20 to 30 m length	pc.	1	1	1
Spring balance, 50 kg capacity	pc.	1	1	1
Spring balance, 100 kg capacity	pc.	1	1	2
Weighing balance, 100 kg capacity	pc.	1	1	2
Shovels	pc.	15	20	25
Crow - bar ϕ 1 1/2"	pc.	4	6	10
Chisels, medium size	pc.	5	6	7
Hammer, small (0,5 kg)	pc.	15	25	35
Hammer, medium (5,0 kg)	pc.	4	6	8
Hammer, big (6,5 kg)	pc.	2	2	3
Mason's squares	pc.	2	2	2
Carpenter's level (spirit-level)	pc.	2	2	2
Plumb bob (plummet)	pc.	3	3	4
Screw jack (6" size)	pc.	1	1	1
Paint for marking (0,5 Litre)	tin	2	2	2
Buckets (20 litres)	pc.	12	16	24
Blowers for black smith	pc.	1	1	2
Hack saw frame	pc.	2	2	2
Hack saw blades, best quality	doz.	1	1	2
Wood saws of different sizes	pc.	3	4	5
Auger ϕ 1/2" and 3/4"	doz.	1/2	1	1
Lay out frame of wooden planks	pc.	1	1	1
Files of different sizes (halfround, triangular, flat, full round)	set.	1	1	1
Die sets (1/4, 1/2, 3/4, 5/8, 7/8, 1" threads)	set.	1	1	1
Tongs	pair.	2	2	3
Nippers (pliers)	pc.	2	2	2
Pincers	pair	2	2	2
Screw drivers of different sizes	set	1	1	1
Nylondori ϕ 1"	m	20	70	120
Manila rope ϕ 1"	m	90	120	180
Bulldog grips for cables ϕ 1/4"	pc.	10	15	20
Bulldog grips for cables ϕ 1/2"	pc.	4	6	6
Bulldog grips for cables ϕ 1"	pc.	-	4	4
Bulldog grips for cables ϕ 1 1/4"	pc.	2	2	2
Bulldog grips for cables ϕ 1 1/2"	pc.	4	6	8
Cable brakes for ϕ 1"	pc.	-	2	2
Cable brakes for ϕ 1 1/2"	pc.	2	4	4

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

COST ESTIMATE FOR SUSPENDED BRIDGES

No. : 7.224

4. Purchase of goods (end) to 6.2 Clearance after completion of execution work

Date : 18th Jan. 77

Sig : *[Signature]*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

4. Purchase of goods and equipment for execution work, 2nd. continuation

Description	39 - 60	63 - 87	90 - ...
chain pulley, 2 tons capacity	pc. 1	1	2
Tirfor machine (complete) 2,5 tons	set. 1	2	-
Tirfor machine (complete) 5,2 tons	set. -	-	2
Rock anchorage for tirfor (Habegger)	set. (1)	(1)	(1)
Wrenches for nut and bolt $\phi \frac{1}{2}$ "	pc. 4	6	8
Wrenches for nut and bolt $\phi \frac{3}{4}$ "	pc. 5	6	6
Socket wrenches for nuts $\phi \frac{3}{4}$ "	pc. 3	3	3
Wrenches for nut and bolt $\phi 1$ "	pc. 2	2	2
Wrenches for nut and bolt $\phi 1 \frac{1}{2}$ "	pc. 2	2	2
Wrenches for nut and bolt $\phi 1 \frac{3}{4}$ "	pc. -	-	2
Wrenches of different other sizes	set. 1	1	1
C - Clamp	pc. 1	1	2

Special equipment only if really required

Blaster's pincers
Rock drilling machine, griding machine for drill bits, drill bits of different length, fuel container, helmet, vice,
Water pump with flexible pipes
Water pipes etc.
Cable car for temporary crossing

The total amount of the above items should not be added to the estimated cost of a proposed bridge. Most of the equipment can be taken from the SBD store and must be returned after completion of the bridge. The goods which cannot be taken from the SBD store will be purchased within the amount of 5% contingencies. The above list is a guideline for the preparation and should show the kind of goods and their approximative amount.

5. TEMPORARY CROSSING

- 5.1 Hire a boat per month
- 5.2 Boat Manday 4 Nos. in dry season (for large river only)
- 5.3 Temporary 'bridge': The span of a temporary crossing (i.e. length) is to take from the general arrangement. The length of a temporary bridge is never as long as for the proposed bridge.
Labour : Unskilled 5 Manday per m span of temporary bridge
Material : Take an assumption of about 25 Rs. per m length

6. SITE CLEARANCE

- 6.1 Clearance before starting of the execution work : L.S. about 300 to 700 Rs.
- 6.2 Clearance after completion, including collection of materials for preparation of auction (but without backfilling) : L.S. about 500 to 1200 Rs.

SATA, Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENDED BRIDGES

No. : 7.225

7. Wood work to 9.1 Painting of wooden longitudinal planks

Date : 18th Jan. 77

Sig : *[Signature]*

His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

7. WOOD WORK FOR 1 m³7.1 Sal wood for decking for 1 m³

Assuming 40 % wastage, total wood required 1.67 m³ (58,8928 cubic feet). The wastage remains at the wooden location - i.e. only one m³ must be transported to the bridge site. A porter carries 40 kg and walks 8 miles (13 km) a day. One m³ is about 900 kg in weight (sal wood). The planks must be sawed according to the standard drawings of HMG's standard bridge design. The lay out frame, supplied by SBD, must be used at the wooden location and the provided holes are to drill at the wooden location too.

Material : 1.67 m³ (58,8928 cubic feet) Royalty;
Labour : 10 Manday Coolies for felling and dressing
35 Manday Coolies for helping etc.
9 Coolies for helping etc.
1/2 Manday Carpenter to drill holes etc.
22 1/2 Nos. of porters for transportation
T. & P. Lumpsum : 1/15th of the above labour

7.2 Salla wood for shuttering for 1 m³

Assuming 40 % wastage, total wood required = 1.67 m³ for 1 m³ sawed wood. The wastage remains at the wooden location. Only one m³ of salla wood must be carried to the bridge site. One m³ of salla wood is assumed with 800 kg per m³.

Material : 1.67 m³ (58,8928 cubic feet)
Labour : 10 Manday Coolies for felling and dressing
35 Manday Saw men to make planks and beams
9 Manday Coolies for helping etc.
20 Nos. of porters for transportation
T. & P. Lumpsum : 1/15th of the above labour

8. LONGITUDINAL FIBRE GLASS PLANKS FOR THE WALK - WAY

8.1 Longitudinal fibre glass planks can provide a usefull alternativ solution for longitudinal planks. The rates may be got from the Balaju Yantra Shala, EYS, at the Industrial Estate Balaju (Kathmandu). This alternative kind of fibre glass planks are cheaper then wooden planks if the wooden location is creating a long and costly transportation. By comparing the different kind of planks, the coalter painting and fixation cost have also to be taken into account.

9. PAINTING OF WOOD USED AT THE WALK - WAY

9.1 Painting of wooden longitudinal planks per m span. Refer to standard walk - way drawing.

Material : 1.176 Litre Coalter paint
0.300 Litre Fuel
Labour : 0.3 Manday Painter
T. & P. Lumpsum : 1/20th of the above

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENDED BRIDGES

No. : 7.226

10. Excavation work to 10.7 Foundation excavation in dry hard rock

Date : 18th Jan. 77

Sig *C. M. ...*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

10. EXCAVATION WORK
(Based on 'Norms' of rate analysis by HMG, Roads Department)
- 10.1 Excavation of top soil and carrying away from the foundation areas (thickness 15 - 20 cm) per SQ.M. (m²)
Labour : Manday 0.40 (Unskilled)
- 10.2 Excavation of common material, haulage distance 10 metres and disposal per CU.M. (m³)
If the above item (10.1) has been taken the volume of the excavation must be calculated in such a way, that the item 10.1 is taken into account.
Labour : Manday 0.80 (Unskilled)
- 10.3 Excavation of soft rock material, requiring use of crowbar, haulage distance 10 m and disposal (take reference to item 10.1) per CU.M. (m³)
Labour : Manday 2.00 (Unskilled)
- 10.4 Excavation - drilling & blasting - hard rock material, haulage distance 10 m and disposal per Cu.M. (m³)
Material : Gelatine 0.25 kg
Detonator 2.00 pc.
Fuse wire 2.00 m
Labour : Manday 3.59 (Unskilled)
Manday 0.05 (Blaster)
- 10.5 Foundation excavation in dry common material - vertical lift 1 m, horizontal haulage distance 10 m and disposal per CU.M. (m³)
If you have used the item 10.1 please take the reduction due to that position into reference by estimating the volumes.
Labour : Manday 1.34 (Unskilled)
Vertical lift : for each additional lift per CU.M. (m³) per 1 m height
Labour : Manday 0.30 (Unskilled)
- 10.6 Foundation excavation in dry soft rock material, vertical lift 1 m, horizontal haulage distance 10 m and disposal per CU.M. (m³)
Labour : Manday 2.50 (Unskilled)
Vertical lift : for each additional lift per CU.M. (m³) per 1 m height
Labour : Manday 0.40 (Unskilled)
- 10.7 Foundation Excavation in dry hard rock, material, drilling and blasting, vertical lift 1 m, horizontal haulage distance 10 m and disposal per CU.M. (m³)
Material : Gelatine 0.25 kg
Detonator 2.00 pc.
Fuse wire 2.00 m

SAT A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENDED BRIDGES

10., continuation to 11.1.3 Gabion of size 2 x 1 x 0.5 m

No. : 7.227

Date : 18th Jan. 77

Sig : *[Signature]*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

10.7 Continuation

Labour : Manday 4.76 (Unskilled)
Manday 0.05 (Blaster)

Vertical lift : for each additional lift per CU.M. (m³) per m hight

Labour : Manday 0.40 (Unskilled)

10.8 Foundation excavation in shallow water, common material, vertical lift 1 m, horizontal haulage distance 10 m and disposal per CU.M. (m³)
This position may be used on the middle piers for multiple span suspension bridges etc. .

Labour : Manday 2.25 (Unskilled)

Vertical lift : for each additional lift per CU.M. (m³) per m hight

10.9 Bottom trimming of rock foundation pit and clearance per SQ.M. (m²)
(refer to detail drawings carefully)

Labour : Manday 0.61 (Unskilled)

11. FABRICATION OF GABION (Based on NORMS by HMG, Roads Department)

11.1 Fabrication of gabion including rolling, cutting and weaving complete.

Mesh size : 80 x 100 mm

Mesh wire : 9 SWG

Selvedge wire: 6 SWG

11.1.1 Box size 2 m x 1 m x 1 m

Material : G.I. Wire 36.00 kg
Selvedge wire 3.75 kg

Labour : Manday 2.42 (Skilled)
Manday 1.21 (Unskilled)

11.1.2 Box size 3 m x 1 m x 1 m

Material : G.I. Wire 52.35 kg
Selvedge wire 4.85 kg

Labour : Manday 3.52 (Skilled)
Manday 1.76 (Unskilled)

11.1.3 Box size 2 m x 1 m x 0.5 m

Material : G.I. Wire 24.55 kg
Selvedge wire 3.00 kg

Labour : Manday 1.650 (Skilled)
Manday 0.825 (Unskilled)

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENDED BRIDGES

No. : 7.226

11.1.4 Gabion box of size 3 x 1 x 0.5 m to 13. Filling of sand, stones, boulders etc. in cell-type foundation

Date : 18th Jan. 77

Sig : *CM. D. J. ...*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

- 11.1.4 Boxe size 3 m x 1 m x 0.5 m
 Material : G.I. Wire 36.00 kg
 Selvedge wire 3.90 kg
 Labour : Manday 2.42 (Skilled)
 Manday 1.21 (Unskilled)
- 11.2 Assemble gabion, place in position including stretching, wiring the gabion together and tying down lids. Analys per box (piece)
 Binding wire : 11 S.W.G.
- 11.2.1 Box size 2 m x 1 m x 1 m
 Material : Binding wire 1.15 kg
 Labour : Manday 0.40 (Unskilled)
- 11.2.2 Box size 3 m x 1 m x 1 m
 Material : Binding wire 1.60 kg
 Labour : Manday 0.60 (Unskilled)
- 11.2.3 Boxe size 2 m x 1 m x 0.5 m
 Material : Binding wire 0.90 kg
 Labour : Manday 0.20 (Unskilled)
- 11.2.4 Boxe size 3 m x 1 m x 0.5 m
 Material : Binding wire 1.20 kg
 Labour : Manday 0.30 (Unskilled)
12. FILLING OF STONES IN GABION CRATES PER CU.M. (m³) based on 'NORMS' by HMG R.D.
 Collection of rubble of required size, haulage distance 10 m, partly stacking, filling in gabion crates per CU.M. (m³)
 Collection of rubble, stones etc.
 Labour : Manday 0.70 (Unskilled)
 Filling in gabion crates
 Labour : Manday 0.80 (Unskilled)
 Additional cost for additional haulage for every 10 m more:
 Labour : Manday 0.16 (Unskilled)
13. FILLING OF SAND, STONES, BOULDERS, ROCK PIECES ETC. IN CELL - TYPE FOUNDATION INCLUDING COMPACTING PER CU. M. (m³)
 The excavation material which lies around the foundation should be used.
 Labour : Manday 0.60 (Unskilled)

COST ESTIMATE FOR SUSPENDED BRIDGES
14. Collection of materials to 14.3.3 Size 5 to 20 mm

No. : 7.229

Date : 18th Jan. 77

Sig : *C. S. Shrestha*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

14. COLLECTION OF MATERIALS
Based on NORMS by HMG Department of Roads
- 14.1 Collection of rubble of required size, haulage distance 10 m and stacking
What are rubbles ? bits of broken stones, rock or brickwork, stones from a river bed, coarse gravel (30 to 55 mm) e.g. build a road with a foundation of rubble
- Collection of rubble of required size per CU.M. (m³)
- Labour : Manday 0.70 (Unskilled)
- Additional work for extra haulage per 10 m per one cubicmetre
- Labour : Manday 0.16 (Unskilled)
- 14.2 Collection of stones, gravel including selection, screening and stacking within 10 m haulage distance per CU.M. (m³)
- 14.2.1 Size 40 to 70 mm
Collection of stones and gravel etc. per m³
Labour : Manday 5.00 (Unskilled)
- Additional work for extra haulage per 10 m per one cubicmetre
- Labour : Manday 0.16 (Unskilled)
- 14.2.2 Size 70 to 100 mm
Collection of stones and gravel etc. per m³
Labour : Manday 4.00 (Unskilled)
- Additional work for extra haulage per 10 m per one cubicmetre
- Labour : Manday 0.16 (Unskilled)
- 14.3 Collection and sieving gravel including stacking within 10 m haulage per CU.M.
- 14.3.1 Size 5 to 70 mm
Collection, sieving and stacking per one cubicmetre
Labour : Manday 2.5 (Unskilled)
- Additional work for extra haulage per 10m per one cubicmetre
- Labour : Manday 0.16 (Unskilled)
- 14.3.2 Size 5 to 40 mm
Collection, sieving and stacking per CU.M. (m³)
Labour : Manday 4.0 (Unskilled)
- Additional work for extra haulage per 10 m per one cubicmetre
- labour : Manday 0.16 (Unskilled)
- 14.3.3 Size 5 to 20 mm
Collection, sieving and stacking per CU.M. (m³)
Labour : Manday 5.88 (Unskilled)
- Additional work for extra haulage per 10 m per one cubicmetre
- Labour : Manday 0.16 (Unskilled)

COST ESTIMATE FOR SUSPENDED BRIDGES

14.3.4 Size 5 to 8 mm to 14.5.4 Making sand by crushing of stones

No. : 7.230

Date : 18th Jan. 77

Sig : *C. M. J. ...*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

14.3 Continuation

14.3.4 Size 5 to 8 mm

Collection, sieving and stacking per CU.M. (m³)

Labour : Manday 10.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.16 (Unskilled)

14.4 Collection and sieving fine sand within 10 m haulage distance per CU.M. (m³)

14.4.1 Collection and sieving sand in hill areas, haulage distance 10 m per CU.M. (m³)

Labour : Manday 1.49 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

14.5 Breacking stones including collection, sieving and stacking within 10 m haulage per CU.M. (m³)

14.5.1 Size 40 to 70 mm

Collection, breacking, sieving etc.

Labour : Manday 8.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

14.5.2 Size 20 to 40 mm

Collection, breacking, sieving etc.

Labour : Manday 12.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

14.5.3 Size 10 to 20 mm

Collection, breacking, sieving etc.

Labour : Manday 18.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

14.5.4 Making sand by crushing of stones per CU.M. (m³)

If the sand location is quite far from the site, the crushing of stones to get sand might be the cheaper way. A carefull comparison should be made. This rate is sanctioned by the Suspension Bridge Division.

Crushing of stones to get sand including collection, sieving and stacking within 10 m haulage distance per CU.M.

Labour : Manday 35.00 (Unskilled)

Additional work for extra haulage per 10 m per one cubicmetre

Labour : Manday 0.12 (Unskilled)

S.A.T.A., Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENDED BRIDGES

15. Dry rubble masonry to 16.3 Stone dressing

No. : 7.231

Date : 18th Jan. 77

Sig : *C. M. Dhaman*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

15. DRY RUBBLE MASONRY PER CU.M.
(Based on 'NORMS' by HMG Roads Department)

15.1 Providing and laying dry rubble masonry of hard block stones, height of masoned body up to five metres and haulage distance within 30 metres per CU.M. (m³)

Collection of rubble refer to item 14.1

Material : rubble 1.10 m³
Labour : Manday 3.50 (Unskilled)

16. R.R. MASONRY IN CEMENT MORTAR PER CU.M.
(Based on rates sanctioned in SBD)

16.1 R.R. Masonry in cement mortar 1 : 4 per CU.M.

This item should only be used below the known high flood level at the pylon and pier foundation for single and multiple span suspension bridges. This kind of masonry work is not allowed for wind guy blocks and main anchor blocks. The detail drawings and general arrangement have to be taken into consideration.

Material : Rubble 1.25 m³
Sand 0.34 m³
Cement 2.55 bags of 50 kg in weight

Labour : Manday 0.10 (Head Mason)
Manday 2.00 (Mason)
Manday 3.20 (Unskilled)
Manday 0.20 (Waterman)

Scaffolding : 1/30th of the above labour

T. & P. Lumpsum : 1/20th of the above labour only

16.2 R.R. Masonry in cement mortar 1 : 6 per CU.M.

Material : Rubble 1.25 m³
Sand 0.42 m³
Cement 2.10 bags of 50 kg in weight

Labour : Manday 0.10 (Head Mason)
Manday 2.00 (Mason)
Manday 3.20 (Unskilled)
Manday 0.20 (Waterman)

Scaffolding : 1/30th of the above labour

T. & P. Lumpsum : 1/20th of the above labour only

16.3 Stone Dressing per CU.M.

This position is actually not necessary for suspension and suspended bridge project by the design section of SBD of HMG Roads Department.

COST ESTIMATE FOR SUSPENDED BRIDGES

No. : 7.232

17. Concrete work to 17.4 Mass concrete 1 : 2 : 4

Date 18th Jan. 77

Sig: *C. P. Sharma*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

17. CONCRETE WORK PER CU.M. (Based on rates sanctioned in SBD)

17.1 Lean concrete 1 : 4 : 8 per CU.M. (m³)
Only used as granular sub grade about 5 to 7 cm thick.

Material :	Aggregate	0.90	m ³
	Sand	0.45	m ³
	Cement	3.30	bags of 50 kg in weight
Labour :	Manday	0.10	Head Mason
	Manday	0.70	Mason
	Manday	1.20	Waterman
	Manday	7.20	Unskilled

T. & P. Lumpsum : 1/20th of the above labour only

17.2 Plum concrete consists of 60 % mass concrete and 40 % boulders and rubbles or hard rock pieces per CU.M. (m³) (Mass concrete 1 : 3 : 6 +

Material :	Aggregate	0.528	m ³	40 % boulders)
	Rubble, etc.	0.500	m ³	
	Sand	0.264	m ³	
	Cement	2.58	0.258	bags of 50 kg in weight
Labour :	Manday	0.60	Head Mason	
	Manday	0.40	Mason	
	Manday	0.70	Waterman	
	Manday	4.30	Unskilled	
	Manday	0.25	Unskilled	(Washing rubble, based on 'NORMS')
	Manday	1.75	Unskilled	(Providing and laying rubble with- in a haulage distance up to 30 m)

T. & P. Lumpsum : 1/20th of the above labour only

17.3 Mass concrete 1 : 3 : 6 per CU.M. (m³)

Material :	Aggregate	0.88	m ³
	Sand	0.44	m ³
	Cement	4.30	bags of 50 kg in weight
Labour :	Manday	0.10	Head Mason
	Manday	0.70	Mason
	Manday	1.20	Waterman
	Manday	7.20	Unskilled

T. & P. Lumpsum : 1/20th of the above labour

17.4 Mass concrete 1 : 2 : 4 per CU.M. (m³)
Refer to detail drawings because this kind of concrete is only used in small quantities at the top of the main anchor block

Material :	Aggregate	0.88	m ³
	Sand	0.44	m ³
	Cement	6.60	bags of 50 kg in weight

COST ESTIMATE FOR SUSPENDED BRIDGES

17.4 Mass concrete 1 : 2 : 4 (continuation) to
20. Backfilling work per m³

No. : 7.233

Date : 20th Febr. 77

Sig : *[Signature]*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

17.4 Mass Concrete 1 : 2 : 4 per CU. M. (continuation)

Labour	:	Manday	0.10	Head Mason
		Manday	0.70	Mason
		Manday	1.20	Waterman
		Manday	7.20	Unskilled

T. & P. Lumpsum : 1/20 of the above Labour only

18. SHUTTERING PER ONE SQ.M. (m²) (Based on rates sanctioned in SBD)
For the foundation used at suspended bridges is not much need of centering work. The shuttering faces are always vertical and plain. Please refer to general arrangement and detail drawings of the Suspension Bridge Division of HMG Roads' Department. For the cost of the needed wood refer to cost item 7.2 (Salla wood for shuttering) but, take into account that for shuttering work at Suspension and Suspended Bridges the longitudinal wooden planks can be used for the wooden form work without wastage the planks.

Material	:	Nails	0.03 kg
Labour	:	Manday	0.10 Carpenter
		Manday	0.10 Unskilled

T. & P. Lumpsum : 1/15th of the above labour only

19. PLACING OF REINFORCEMENT IN CEMENT CONCRETE WORK PER 100 KG (kg)
The reinforcement steel used at suspension and suspended bridges is rather simple and of easy design. There are easy bending forms (only straight with hooks at its ends) or U-forms for starter bars etc.

19.1 Reinforcement steel cutted and bended at the bridge site

Material	:	Reinforcement	100 kg (it might be supplied by SBD/SATA etc)
		Binding wire	0.50 kg

Labour	:	Manday	3	Blacksmith
		Manday	4	Unskilled

T. & P. Lumpsum : 1/20th of the above labour only

19.2 Reinforcement 'ready made' by the workshop according to the list of HMG Suspension Bridge Division

Material	:	Reinforcement	100 kg (Cost included in the manufacturing costs of the steel construction by the workshop)
		Bending wire	0.50 kg

Labour	:	Manday	0.20	Blacksmith
		Manday	2	Unskilled

T. & P. Lumpsum : 1/20th of the above labour only

20. BACKFILLING WORK PER CU.M. (m³) (Based on rates sanctioned in SBD)
The backfilling work must be done at each foundation to protect the blocks against erosion and sliding. The passive earth pressure is also often be taken into account by calculating the foundation blocks. Thus the backfilling must be made proper and compacted in layers of 20 cm as much as possible.

Labour	:	Manday	0.50	Unskilled
--------	---	--------	------	-----------

COST ESTIMATE FOR SUSPENDED BRIDGES

21. Placing of anchorage parts to 22.1
Hoisting of main cables per m span

No. : 7.234

Date : 18th Jan. 77

Sig : *C. Madhavan*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

21. PLACING OF ANCHORAGE PARTS FOR SUSPENDED BRIDGES PER UNIT AT ONE SITE
(Based on rates sanctioned by the Suspension Bridge Division of HMG Roads Department)

21.1 Main cable anchorage for one anchor block at one river side

21.1.1 Suspended Bridges from 39 to 60 m span
The analysis includes all work which is needed to place the anchor parts for the main and hand-rail cables. Because the steel parts are standardized, the required work is the same for all bridges within the spans from 39 to 60 m

Fitter (Manday) 1
Unskilled (Manday) 2

21.1.2 Suspended Bridges from 63 to 87 m span

Fitter (Manday) 1,3
Unskilled (Manday) 2,6

21.1.3 Suspended Bridges from 90 to 126 m span

Fitter (Manday) 2,0
Unskilled (Manday) 4,0

21.1.4 Suspended Bridges from 127 to m span

Fitter (Manday) 3,0
Unskilled (Manday) 6,0

21.2 Placing of standard wind cable anchorage per anchor block - i.e. cable end. Please refer to standard lay out drawings, general arrangement and detail drawings of the wind guy blocks etc.

Cable ϕ in inch ("	$\phi \frac{1}{2}$ " (tie cable only)	$\phi 1"$	$\phi 1\frac{1}{4}"$	$\phi 1\frac{1}{2}"$
Fitter (Manday)	0,20 For short spans	0,30	0,60	0,80
Unskilled (Manday)	0,20 only used	0,30	0,90	1,40

At short span bridges (up to 54 m) the wind bracing cables might not be proposed. Please read the general arrangement carefully.

21.3 Placing of anchorage parts in rock anchor foundation types, 'tunnel' or drilled holes in hard or sound rock per anchorage unit (cable end)

Take four (4) times the above rates (item 21.2) which are confirmed to the cable ϕ .

22. CABLE HOISTING FOR SUSPENDED BRIDGES
(Based on rates sanctioned in SBD)

22.1 Hoisting of main cable per m span (m1/span) for one main cable only. The diametres are according to HMG Standard design. Refer also to chapter 2.4 (Standard design for suspended bridges) e.g. page 2.403. The cables must be at least three (3) times vrepped on the drum anchorage - i.e. the cable ends have to be turned 3 times around the drum anchorage. These work is also included in the following rates. The standard of the suspended bridges shows, that only cables of $\phi 1\frac{1}{2}"$ (breaking load 77 tons) are used.

Fitter (Manday) 0,15
Unskilled (Manday) 0,90

Note : Fitter (Manday) and unskilled Labour (Manday) are given per m span of the bridge for one cable only. Hoisting sags and numbers of cables refer to page 2.403 and general arrangement.

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENDED BRIDGES

22.2 Hoisting of wind guy cables to 23.1
Erection of the walk - way

No. : 7.235

Date : 18th Jan. 77

Sig :

C. M. ...



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

22.2 Hoisting of the wind - guy cables per m span of the wind-guy cable

The span of the wind - guy cable is often not the same as the span of the bridge. Please take the correct span from the general arrangement. The distance between the wind tie cables ($\phi \frac{1}{4}$ ") is 4.80 m according to HMG'S Standardization. In the general arrangement the real distances between the wind - tie clamps should be given. To mark e.g. with paint where the wind tie clamps should be placed is also included in the following rates. The wind guy cables should be pretensioned. To take up this force on each cable end turn buddies etc. are provided. Before starting the hoisting work those turn-buckles must be wide opened.

ϕ of wind cables	Fitter (Manday)	Unskilled (manday)
$\phi \frac{1}{2}$ "(12,7mm)	0.07	0.50
$\phi 1$ "(25,4mm)	0.10	0.60
$\phi 1 \frac{1}{4}$ "(31,8mm)	0.12	0.75
$\phi 1 \frac{1}{2}$ "(38,1mm)	0.15	0.90

22.3 Hoisting and fixation of the wind ties $\phi \frac{1}{4}$ " per piece.

The numbers of wind ties can be taken from the general arrangement. The wind - ties are provided every 4.80 m according to the standard design. Sometimes the wind anchor blocks are placed either in front or back the pylon foundation center line - i.e. the number of wind ties varies.

Labour per wind tie (piece) :	Fitter	0.15	(Manday)
	Unskilled	0.15	(Manday)

The above labour includes the time needed for the fixation on the cross beam of the walk - way (Gangway)

22.4 Fitting of fixation and hand rail cables per m span of the bridge.

This work can be estimated per m length of the bridge, because the Standard design of the suspension bridges shows two hand rail and partly two fixation cable for each bridge. The hoisting for these four cables is very easy because this work will be done after erection of the walk way.

		spans from 39 to 60	63 to ... m
Labour :	Manday	0.07 Fitter	0.08 Fitter
	Manday	0.10 Unskilled	0.12 Unskilled

23. ERECTION OF THE WALK - WAY PER M SPAN (LENGTH)
(Based on rates sanctioned in SBD)

23.1 Erection of the hangers (which are members of the cross beam), cross beam, wind bracing flats etc. per m length of the bridge.

The standard design of HMG Roads Department shows for all bridges the same way system. Because of that the assembling work can be standardized.

Labour :	Manday	1.10	Fitter
	Manday	1.90	Unskilled

S A T A , Swiss Association for Technical Assistance

COST ESTIMATE FOR SUSPENDED BRIDGES

23.2 Fitting of nailing strips to finishing work 24.1

No. : 7.236

Date : 20th Febr. 77

Sig : *[Signature]*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT

Suspension Bridge Division

23.2 Fitting of wooden deck

23.2.1 Fitting of nailing strips to the cross beams of the walk way per m length of the bridge

The nailing strips should be bolted to the m.s. channel cross beam before starting the erection work. At the river sides this work goes much quicker than on the swaying cables during the assembling work.

Material : Bolts and nuts (washers) supplied by workshop

Labour : Manday 0.01 Carpenter
Manday 0.01 Fitter
Manday 0.01 Unskilled

23.2.2 Fitting of the wooden longitudinal planks per m length of the bridge.

The wooden planks are to be nailed to the nailing strips described in the above cost item 23.2.1

Material : Nails etc. Supplied by the Workshop

Labour : Manday 0.15 Fitter
Manday 0.30 Unskilled

23.2.3 Fitting of the fibre glass longitudinal planks

This alternative solution for planking might be sometimes very useful. By estimating the bridge costs the reference to the proposed kind (either wood or fibre glass) must be taken.

Material : Bolts (e.g. wooden screw) and washers Supplied by the Workshop
Fibre glass planks Supplied by the Workshop too

Labour : Manday 0.17 Fitter
Manday 0.10 Unskilled

23.3 Fitting of wire mesh netting per m length of the bridge.

Bending wires, U-nails for short bridges, wire mesh netting etc. will be supplied by the Workshop. The length of the bridge must not be taken twice, because the rates include already that on both parapets of the bridge wire mesh must be fixed.

Material : Wire mesh, binding wire etc. by the Workshop

Labour : Manday 0.06 Fitter
Manday 0.30 Unskilled

24. FINISHING WORK

24.1 Maintain of threads of the main clamps, turnbuckles and wind-guy anchorage rods per cable end.

Labour : Manday 0.08 Fitter per cable end

SAT A, Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

COST ESTIMATE FOR SUSPENDED BRIDGE
 24.2 Retightening to 24.4 Painting work

No. : 7.237

Date : 21th Febr. 77

Sig : *C. Shrestha*



His Majesty's Government
 Ministry of Public Works & Transport
 ROADS DEPARTMENT

Suspension Bridge Division

24.2 Retightening of cable clamps, bulldog grips, turn buckles, lock nuts, etc.

After the completion of the bridge this item is important and must be done carefully

lengthe of the bridge in m	Fitter (Manday)
39 to 54	1
57 to 60	2
36 to 126	3
127 to	4

24.3 Joint sealer (refer to page 5.206 of this book)

Everytime when main cables are fixed by drum-anchorage and the final concrete - after completion of the erection work - work is finished, there is a joint between the main cables and the concrete. In such cases it is most useful to apply an elastic joint sealer to prevent rust in these section. The reference to page 5.205 should also be made.

The quantities given below are including the component A as well as the component B. The primer is used to allow a correct joint (bond) between the concrete, cable and joint sealer.

Spans in m	Thanatar A + B (Joint sealer)		Thana Primer (Primer)		Labour in Manday Unskilled Skilled	
	39 - 60	3,2 litres	0,4 litre	0.30	0.30	0.30
63 - 87	6,4 litres	0.8 litre	0.50	0.50	0.50	0.50
87 - 126	9,6 litres	1.2 litres	0.70	0.70	0.70	0.70

T. & P. Lumpsum : 1/20th of the above labour only

The above rates are for one bridge

24.4 Painting of the steelconstruction

The workshop has to deliver the steelpart two times painted. Due to transportation some re-painting work may be necessary. This work is only to do at the turn-buckles for the windguy and hand-rail cables. Take the same kind and color of paint which has been used by the workshop.

Span in metres	paint required	Painter	Helper (Unskilled)
39 - 54	0.50 litre	0.80	0.80 (Manday)
57 - 60	1.00 litre	1.50	1.50 (Manday)
63 - 126	1.50 litres	2.20	2.20 (Manday)
127 - ...	2.00 litres	3.00	3.00 (Manday)

T. & P. Lumpsum : 1/20th of the above labour only

Noteworth: There are different kind of material etc. needed for many of the item which are in this rate analysis for the preparation of cost estimates of standard suspended bridges. The site in charge should work out a list of the goods to be purchased, but he has to note, that the costs are already included in the rate analysis. The used cost items for a particular bridge must be overchecked to be certain, that the goods to be purchased are included.

COST ESTIMATE

Quotation for a Suspended Bridge
(steel construction)

No. : 7.301

Date : 22nd Febr. 77

Sig : *[Signature]*

Quotation for : Span : m

Dear Sirs,

Please let us have your best offer for the following items of the above mentioned Suspended Bridge (bridge without pylons) according to HMG' Standard Design. Enclosed herewith please find all needed drawings and steelpartlists, which give you all the information. Would you please fill in this list and send it to the Suspension Bridge Division of HMG' Roads' Department. The construction work must be done according to the Indian Standard and the enclosed Standard Drawings. In add. the below mentioned points have also to be kept :

- i : The settlement of the final account for construction work will be based on the theoretical weights of the steelparts list of HMG' Standard Drawings.
- ii : One test assembly must be made by the workshop and shown to the Suspension Bridge Division of HMG' Roads' Department.
- iii : The numbers of the steelparts list must be written on the finished steelparts, units and members.
- iv : Threads etc. must be protected with jute etc.
- v : The workshop is responsible for seeing that all thimbles can be fitted on the provided pins, steelparts, bolts etc.
- vi : The points given in the enclosed "Terms of steelwork" (refer to pages 7.5) must be taken into consideration. The "Terms of steelwork" is an integral part of this quotation form.

Item Nos.	Specification, etc. Steel supplied by whom	Quantity kg	Rate per Rs.	Total Item Rs.
1	Transport of steel which is supplied by the Suspension Bridge Division from the SBD store to the Workshop
2	Cutting and Bending of reinforcement rods according the lists - with steel supplied by SBD
	- with steel supplied by the workshop
3	Fabrication cost of main cable, hand rail cable and wind guy anchorages - with steel supplied by SBD
	- with steel supplied by the workshop
4	Fabrication cost of deck (walkway) incl. hanger rods, wind bracing clamps etc. - with steel supplied by SBD
	- with steel supplied by the workshop
5	Delivery of wire mesh netting, 120 cm wide, 3mm galvanized, one transport unit has to be below 45 kg (prices per m length) - with wire supplied by SBD (manufacturing)
	- with wire supplied by the Workshop
6	Delivery of open thimbles IS 2315-1963, galvanized			
6.1	Thimbles for cable $\phi \frac{1}{4}$ " (price per piece)
6.2	Thimbles for cable $\phi \frac{1}{2}$ " (price per piece)
6.3	Thimbles for cable $\phi 1$ " (price per piece)
6.4	Thimbles for cable $\phi 1\frac{1}{4}$ " (price per piece)
6.5	Thimbles for cable $\phi 1\frac{1}{2}$ " (price per piece)

S A T A , Swiss Association for Technical Assistance

...../continued

HMG Nepal Roads Department Suspension Bridge Division

<p>COST ESTIMATE</p> <p>Quotation for a Suspended Bridge (continuation) (steel construction)</p>	<p>No. : 7.302</p> <hr/> <p>Date : 22nd Febr.77</p> <hr/> <p>Sig : <i>[Signature]</i></p>
--	---

Item Nos.	Specification, etc. Steel supplied by whom	Quantity kg.	Rate per Rs.	Total Item Rs.
7	Delivery of bulldog grips IS 2361-1970 , galvanized			
7.1	Bulldog grips for cable $\phi \frac{1}{4}$ " (price/piece)			
7.2	Bulldog grips for cable $\phi \frac{1}{2}$ " (price/piece)			
7.3	Bulldog grips for cable $\phi 1$ " (price/piece)			
7.4	Bulldog grips for cable $\phi 1\frac{1}{4}$ " (price/piece)			
7.5	Bulldog grips for cable $\phi 1\frac{1}{2}$ " (price/piece)			
8	Painting of the whole steel construction according to the drawings and steelparts lists after cleaning of the steelparts.			
8.1	Painting with paint supplied by SBD			
	- first coat (base coat) (price per m2)			
	- second coat (finish coat) (price per m2)			
8.2	Painting and delivery of paint by the workshop			
	- first coat (base coat) (price per m2)			
	- second coat (finish coat) (price per m2)			
9.	Delivery of cables 6x19 (12/6/1) according to Indian Standard 2266-1970. The cables are to deliver with steel wire core and galvanized.			
9.1	Delivery of cables $\phi \frac{1}{4}$ " , Breaking load 2.3 t according to cable list (price per m length).....			
9.2	Delivery of cables $\phi \frac{1}{2}$ " , breaking load 8.79 t according cable list (price per m length).....			
9.3	Delivery of cables $\phi 1$ " , breaking load 35.9 t according cable list (price per m length).....			
9.4	Delivery of cables $\phi 1\frac{1}{4}$ " ,breaking load 54.4 t according cable list (price per m length).....			
9.5	Delivery of cables $\phi 1\frac{1}{2}$ " , breaking load 77 t according to cable list (price per m length).....			
1-9	Total cost without sale tax		=

S A T A . Swiss Association for Technical Assistance

The sale tax is not to be included in the rates etc.

Term of delivery from the date of receiving the order of the Suspension Bridge Division of HMG Roads' Department :

Item No. 2	weeks	Item No. 3	weeks
Item No. 4	weeks		
Item No. 5	weeks	Item No. 6	weeks
Item No. 7	weeks	Item No. 9	weeks

The closing date for receipt of quotations will be on

Date

Signature and stamp of the Workshop

COST ESTIMATE

No. : 7.401

Quotation for a Suspension Bridge
(Steel construction)

Date : 28th Febr. 77

Sig : *[Signature]*

Quotation for : Span : m

Dear Sirs,

Please let us have your best offer for the following items of the above mentioned Suspension Bridge (bridge with pylons) according to HMG' Standard Design. Enclosed herewith please find all needed drawings and steel part lists, which give you all the information. Would you please fill in this list and send it to the Suspension Bridge Division of HMG' Roads' Department. The construction work must be done according to the Indian Standard and the enclosed Standard Drawings. In addition the below mentioned points have also to be kept :

- i : The settlement of the final account for construction work will be based on the theoretical weights of the steel parts list of HMG' Standard Drawings.
- ii : One test assembly must be made by the workshop and shown to the Suspension Bridge Division of HMG' Roads' Department.
- iii : The numbers of the steel parts list must be written on the finished steel parts, units and members.
- iv : Threads etc. must be protected with jute etc.
- v : The workshop is responsible for seeing that all thimbles can be fitted on the provided pins, steel parts, bolts etc.
- vi : The points given in the enclosed "Terms of steelwork" (refer to pages 7.5) must be taken into consideration. The "Terms of steelwork" is an integral part of this quotation form.

Item Nos.	Specification, etc. Steel supplied by whom	Quantity kg	Rate per Rs.	Total Item Rs.
1	Transport of steel which is supplied by the Suspension Bridge Division from the SBD store to the Workshop
2	Cutting and Bending of reinforcement rods according to the lists - with steel supplied by SBD
	- with steel supplied by the workshop
3	Fabrication cost of main cable, walk-way pylon, side stay and wind guy anchorages - with steel supplied by SBD
	- with steel supplied by the workshop
4	Fabrication of pylon construction - with steel supplied by SBD
	- with steel supplied by the workshop
5	Fabrication of deck (walk-way), Suspenders, stabilizing cable clamps, wind tie clamps, etc. - with steel supplied by SBD
	- with steel supplied by the workshop
6	Delivery of wire mesh netting, 90 cm wide, 3mm galvanized, one transport unit has to be below 45 kg (price per m length)			
	- with wire supplied by SBD (manufacturing)
	- with wire supplied by the workshop

...../continued

S A T A . Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

COST ESTIMATE

No. : 7.402

Quotation for a Suspension Bridge (continuation)
(steel construction)

Date : 28th Febr. 77

Sig : *[Signature]*

Item Nos.	Specification etc. Steel supplied by whom	Quantity	Rate per Rs.	Total Item Rs.
7	Delivery of open thimbles IS 2315-1963, galvanized			
7.1	Thimbles for cable $\phi \frac{1}{4}$ " (price per piece)
7.2	Thimbles for cable $\phi \frac{1}{2}$ " (price per piece)
7.3	Thimbles for cable $\phi 1$ " (price per piece)
7.4	Thimbles for cable $\phi 1\frac{1}{4}$ " (price per piece)
7.5	Thimbles for cable $\phi 1\frac{1}{2}$ " (price per piece)
8	Delivery of bulldog grips IS 2361-1970, galvanized			
8.1	Bulldog grips for cable $\phi \frac{1}{4}$ " (price/piece)
8.2	Bulldog grips for cable $\phi \frac{1}{2}$ " (price/piece)
8.3	Bulldog grips for cable $\phi 1$ " (price/piece)
8.4	Bulldog grips for cable $\phi 1\frac{1}{4}$ " (price/piece)
8.5	Bulldog grips for cable $\phi 1\frac{1}{2}$ " (price/piece)
9	Painting of the whole steel construction according to the drawings and steelparts lists after cleaning of the steel parts.			
9.1	Painting with paint supplied by SBD			
	- first coat (base coat) (price per m2)
	- second coat (finish coat) (price per m2)
9.2	Painting and delivery of paint by the workshop itself			
	- first coat (base coat) (price per m2)
	- second coat (finish coat) (price per m2)
10	Delivery of cables 6x19 (12/6/1) according to Indian Standard 2266-1970. The cables are to deliver with steel wire core and galvanized.			
10.1	Delivery of cables $\phi \frac{1}{4}$ ", Breaking load 2,3 t according to cable list (price per m length).....
10.2	Delivery of cables $\phi \frac{1}{2}$ ", Breaking load 8.79 t according to cable list (price per m length).....
10.3	Delivery of cables $\phi 1$ ", Breaking load 35,90 t according to cable list, (price per m length)
10.4	Delivery of cables $\phi 1\frac{1}{4}$ ", Breaking load 54,4 t according to cable list, (price per m length).....
10.5	Delivery of cables $\phi 1\frac{1}{2}$ ", Breaking load 77,0 t according to cable list, (price per m length).....
1 - 10	Total cost without sale tax		=

...../ continued

HMG Nepal

Roads Department

Suspension Bridge Division

COST ESTIMATE Quotation for a Suspension Bridge (continuation) (steel construction)	No. : 7.403
	Date : 28th Febr. 77
	Sig : <i>Has Hob</i>

The sale tax is not to be included in the rates etc.

Term of delivery from the date of receiving the order of the Suspension Bridge Division of HMG Roads' Department :

- Item No. 2 weeks
- Item No. 3 weeks
- Item No. 4 weeks
- Item No. 5 weeks
- Item No. 6 weeks
- Item No. 7 weeks
- Item No. 8 weeks
- Item No. 10 weeks

The closing date for receipt of quotations will be on 19....

Date 19 ...

Signature and stamp of the Workshop

- Enclosures : - Standard Drawings
- "Terms of Steelwork"
 - Quotation forms (2 x)
 - Cable list
 - Reinforcement steel list

S A T A . Swiss Association for Technical Assistance

COST ESTIMATE

No. : 7.501

TERMS OF STEELWORK for Suspension and Suspended Bridges

Date : 1st March 77

Sig : *for PPAK*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT
Suspension Bridge Division

1 INTRODUCTION

The here given points etcetera must be taken into consideration by offering and manufacturing of steel construction. In addition the Indian Standards dealing with the steel construction etcetera must also be kept in mind. These "terms of steelwork" of the Suspension Bridge Division is an integral part of all orders concerning the construction of any kind of bridges and spare parts etc. These "terms of steelwork" have the first priority, e.g. come before the IS.

2 SAFETY REQUIREMENTS AND HEALTH PROVISIONS

For purpose of safety requirements and health provisions, reference may be made to IS : 818-1968.

3 STRAIGHTENING

All material shall be straight and, if necessary, before being worked shall be straightened and/or flattened by pressure, unless required to be of curvilinear form and shall be free from twists.

4 CLEARANCES

The erection clearance for cleated ends of members connecting steel to steel should preferably be not bigger than 1.0 mm at each end. The erection clearance at ends of beams without web cleats should be not more than 2 mm at each end, but where, for practical reasons, bigger clearance is necessary, suitably designed seatings should be provided. For members under compression load, like column shafts, the connecting steel to steel is usually designed as direct (contact) joints. Refer to 'machining of butts, caps and bases' (Article 1C). Where black bolts are used, the holes may be made not more than 2.0 mm bigger than the diameter of the bolts, unless otherwise specified by the engineer. vsp. Standard Drawings of HMG.

5 CUTTING

Cutting may be effected by shearing, cropping or sawing. Gas cutting by mechanically controlled torch may be permitted for mild steel only. Gas cutting of high tensile steel may also be permitted provided special care is taken to leave sufficient metal to be removed by machining so that all metal that has been hardened by flame is removed. Hand flame cutting may be permitted subject to the approval of the Inspector of the Suspension Bridge Division. Except where the material is subsequently joined by welding, no loads shall be transmitted into metal through a gas cut surface. Shearing, cropping and gas cutting, shall be clean, reasonably square and free from any distortion and should the Inspector find it necessary, the edges shall be ground afterwards.

6 HOLLING

Holes through more than one thickness of material for members shall be drilled, where possible, after the members are assembled and tightly clamped or bolted together in the workshop. Punching may be permitted before test assembly, provided the holes are punched 3 mm less in diameter than the required size and reamed after shop assembly to the full diameter. The thickness of material punched shall not be bigger than 14 mm. When holes are drilled in one operation through two or more separable parts, these parts, when so specified by the engineer, shall be separated after drilling and the burrs removed. Holes in connecting angles and plates, other than splices, also in roof members and light framing, may be punched full size through material not over 10 mm thick, except where required for close tolerance or barrel bolts. Matching holes for rivets and black bolts shall register with each other so that a gauge of 1.5 mm or 2.0 mm (as the case may be, depending on whether the diameter of bolts is less than or more than 25mm) less in diameter than the diameter of the hole will pass freely through the assembled members in the direction at right angle to such members. Finished holes shall be not more than 1.5 mm or 2.0 mm (as the case may be) in diameter larger than the diameter of the black bolt passing through them, unless otherwise specified by the engineer of HMG' Roads' Department. Holes for turned and fitted bolts shall be drilled to a diameter equal to the nominal diameter of the shank or barrel subject to H8 tolerance specified in IS:919, last edition, "Recommendations for Limits and Fits for Engineering". Preferably, parts to be connected with close tolerance or barrel bolts shall be firmly held together by tacking bolts or clamps and the holes drilled through all the thicknesses. In one operation and subsequently reamed to size. All holes not drilled through all thicknesses at one operation shall be drilled to a smaller size and reamed out after assembly. Where this is not practicable, the parts shall be drilled and reamed separately through hard pushed steel jigs. Holes for rivets or bolts shall not be formed by a gas cutting process.

7 ASSEMBLY

The component parts shall be assembled in such a manner that they are neither twisted nor otherwise damaged and shall be so prepared that the specified cambers, if any, are provided. Refer also to point 15: Shop erection (Test assembly).

8 BOLTING

Where necessary washers shall be tapered or otherwise suitably shaped to give the heads and nuts of bolts a satisfactory bearing. The threaded portion of each bolt shall project through the nut at least one thread. In all cases where the full bearing area of the bolt is to be developed, the bolt shall be provided with a washer of sufficient thickness under the nut to avoid any threaded portion of the bolt being within the thickness of the parts bolted together.

S.A.T.A., Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

COST ESTIMATE

No. : 7.502

TERMS OF STEELWORK for Suspension and Suspended Bridges
(1st continuation)

Date : 1st March 77

Sig : *[Signature]*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT
Suspension Bridge Division

9 WELDING

The welders shall be trained in accordance with IS : 817-1966*. They shall also be subjected to appropriate qualifying specified in IS : 1181-1967.

Welding shall be in accordance with any of the following standards as appropriate:

- IS : 816-1969 Code of practice for use of metal arc welding for general construction in mild steel
- IS : 819-1957 Code of practice for resistance spot welding for light assemblies in mild steel
- IS : 820- Code of practice for use of welding in tubular construction
- IS : 821- Code of practice for use of welding in pipelines
- IS : 822- Code of practice for inspection of welds
- IS : 823-1964 Code of procedure for manual metal arc welding of mild steel
- IS : 1024-1968 Code of practice for use of welding in bridges and structures subject to dynamic loading
- IS : 1261-1959 Code of practice for seam welding in mild steel
- IS : 1323-1959 Code of practice for oxy-acetylene welding for structural work in mild steel

For welding of any particular type of joint, welders shall give evidence acceptable to the purchaser of having satisfactorily completed appropriate tests as described in any of the following standards as relevant:

- † IS : 817-1957 Code of practice for training and testing of metal arc welders
- † IS : 1181-1957 Qualifying tests for metal arc welders (engaged in welding structures other than pipes)
- † IS : 1393-1961 Code of practice for training and testing of oxy-acetylene welders

If there are any new editions of Indian Standard these should be used as references.

10 MACHINING OF BUTTS, CAPS AND BASES

Column splices and butt joints of struts and compression members depending on contact for stress transmission shall be accurately machined and close-butted over the whole section with a clearance not exceeding 0.1 mm locally at any place. In column caps and bases, the ends of shafts together with the attached gussets, angles, channels, etc. after riveting together, should be accurately machined so that the parts connected butt over the entire surfaces of contact. Care should be taken that those connecting angles or channels are fixed with such accuracy that they are not reduced in thickness by machining by more than 1.0 mm. Ends of all bearing stiffeners shall be machined or ground to fit tightly at both top and bottom.

11 SLAB BASES AND CAPS

Slab bases and slab caps, except when cut from material with true surfaces, shall be accurately machined over the bearing surfaces and shall be in effective contact with the end of the stanchion. A bearing face which is to be grouted direct to a foundation need not be machined if such face is true and parallel to the upper face. To facilitate grouting, holes shall be provided where necessary in stanchion bases for the escape of air.

12 SOLID ROUND STEEL COLUMNS

Solid round steel columns with shouldered ends shall be provided with slab caps and bases machined to fit the shoulders, and shall be tightly shrunk on or welded in position. The tolerance between the reduced end of the shaft and the hole, in the case of slabs welded in position, shall not exceed 0.25 mm. Where slabs are welded in position, the reduced end of the shaft shall be kept just sufficiently short to accommodate a fillet-weld around the hole without weld-metal being proud of the slab. All bearing surfaces of slabs intended for metal-to-metal contact shall be machined perpendicular to the shaft.

13 PAINTING

All surfaces which are to be painted, oiled or otherwise treated shall be dry and thoroughly cleaned to remove all loose scale and loose rust. Surfaces not in contact, but inaccessible after shop assembly, shall receive the full specified protective treatment before assembly. This does not apply to the interior of sealed hollow sections. In the case of surfaces to be welded, the steel shall not be painted or metal coated within a suitable distance of any edges to be welded if the paint specified or the metal coating would be harmful to welders or impair the quality of the welds. Welds and adjacent parent metal shall not be painted prior to deslagging, inspection and approval. Parts to be encased in concrete shall not be painted or oiled. Refer to standard drawings and steel part lists. Before painting of steel is commenced, all surfaces to be painted shall be dry and thoroughly cleaned from all loose scale and rust. The specified protective treatment shall be completed after erection. All bolt heads and the welds after deslagging shall be cleaned. The base coat (primer) and second coat (finish coat) shall be done by the workshop. Where the steel has received a metal coating in the shop, this coating shall be completed in the workshop after the test assembly.

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

COST ESTIMATE

No. : 7.503

TERMS OF STEELWORK for Suspension and Suspended Bridges
(2nd continuation)

Date : 1st March 77

Sig : *f. Roth*



His Majesty's Government
Ministry of Public Works & Transport
ROADS DEPARTMENT
Suspension Bridge Division

14 MARKING

Each piece of steelwork shall be distinctly marked before delivery, in accordance with a marking diagram, and shall bear such other marks as will facilitate erection. The marking used by the standard drawings must be taken.

15 SHOP ERECTION (TEST ASSEMBLY)

The steelwork shall be temporarily shop erected complete or as arranged with the inspector so that accuracy of fit may be checked before despatch. The parts shall be shop assembled with a sufficient number of parallel drifts to bring and keep the parts in place.
In the case of parts drilled or punched, through steel jigs with bushes resulting in all similar parts being interchangeable, the steelwork may be shop erected in such position as arranged with the inspector.
The workshop is responsible for seeing that all thimbles etc. can be fitted on the provided pins, steeparts, bolts etc.
If there are any differences the engineers of HMG' Roads' Department must be contacted. The test assembly should be shown to the Suspension Bridge Division.

16 PACKING

All projecting plates or bars and all ends of members at joints shall be stiffened, all straight bars and plates shall be bundled, all screwed ends and machined surfaces shall be suitably packed and all rivets, bolts, nuts, washers and small loose parts shall be packed separately in cases so as to prevent damage or distortion during transit. All threads shall be protected with grease and jute.

The transport units (including wire mesh netting) shall not exceed 45 kg in weight.
Take reference to the Standard Drawings.

The packing work shall be done in such a way, that after a rough transportation by truck, aeroplane, helicopter, rope way, boats, beasts of burden as well as porters, the packing will be still in good order. The costs of packing shall be included in the rates. Cable ends are to handle with care and their end must be protected correctly against any accident.

17 INSPECTION AND TESTING

Access to Contractor's Works - The contractor should offer facilities for the inspection of the work at all stages.
Inspection of Fabrication - Unless otherwise agreed this inspection should be carried out at the place of fabrication. The contractor should be responsible for the accuracy of the work and for any error which may be subsequently discovered.
Inspection on Site - To facilitate inspection the contractor should, during all working hours, have a foreman or properly accredited charge hand available on the workshop together with a complete set of contract drawings and any further drawings and instructions which may have been issued from time to time.
The inspector shall have free access at all reasonable times to those parts of the manufacturer's works which are concerned with the fabrication of the steelwork and shall be afforded all reasonable facilities for satisfying himself that the fabrication is being undertaken in accordance with the provisions of the standard drawings and the "terms of steelwork".
Unless specified otherwise inspection shall be made at the place of manufacture prior to despatch and shall be conducted so as not to interfere unnecessarily with the operation of the work.
The manufacturer shall guarantee compliance with the provisions of this standard, if required to do so by the purchaser.
Should any structure or part of a structure be found not to comply with any of the provisions of this standard, it shall be liable to rejection.
No structure or part of the structure, once rejected shall be resubmitted for test, except in cases where the purchaser or his authorized representative considers the defect as rectifiable.
Defects which may appear during fabrication shall be made good with the consent of and according to the procedure laid down by the inspector.
All gauges and templates necessary to satisfy the inspector shall be supplied by the manufacturer. The inspector may at his discretion check the test results obtained at the manufacturer's works by independent tests at the Government Test House or elsewhere, and should the material so tested be found to be unsatisfactory, the costs of such tests shall be borne by the manufacturer, and if satisfactory, the costs shall be borne by the purchaser.

18 STORING AND HANDLING

All structural steel should be so stored and handled to the Suspension Bridge Division that the members are not subject to excessive stresses and damage.

19 FIELD WELDING

All field assembly and welding shall be executed in accordance with the requirements for shop fabrication, excepting such as manifestly apply to shop conditions only. Where the steel has been delivered painted, the paint shall be removed before field welding, for a distance of at least 50 mm on either side of the joints.
This point shall be very unused at suspension and suspended bridges of HMG' Roads' Department and might only be necessary for maintenance and repairing work at existing bridge sites.

COST ESTIMATE

Network of roads in Nepal, Distances


No : 7.601

Date : 23rd Febr. 77


Sig : *[Signature]*

Main Road Network in Nepal

WEST

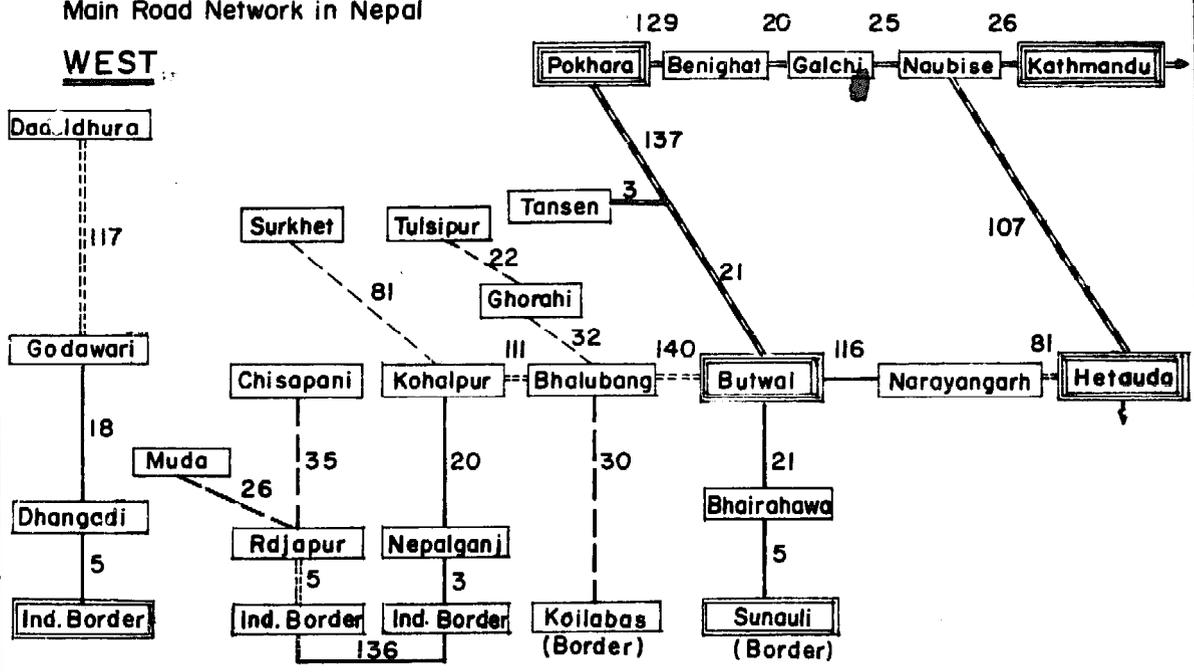

EAST

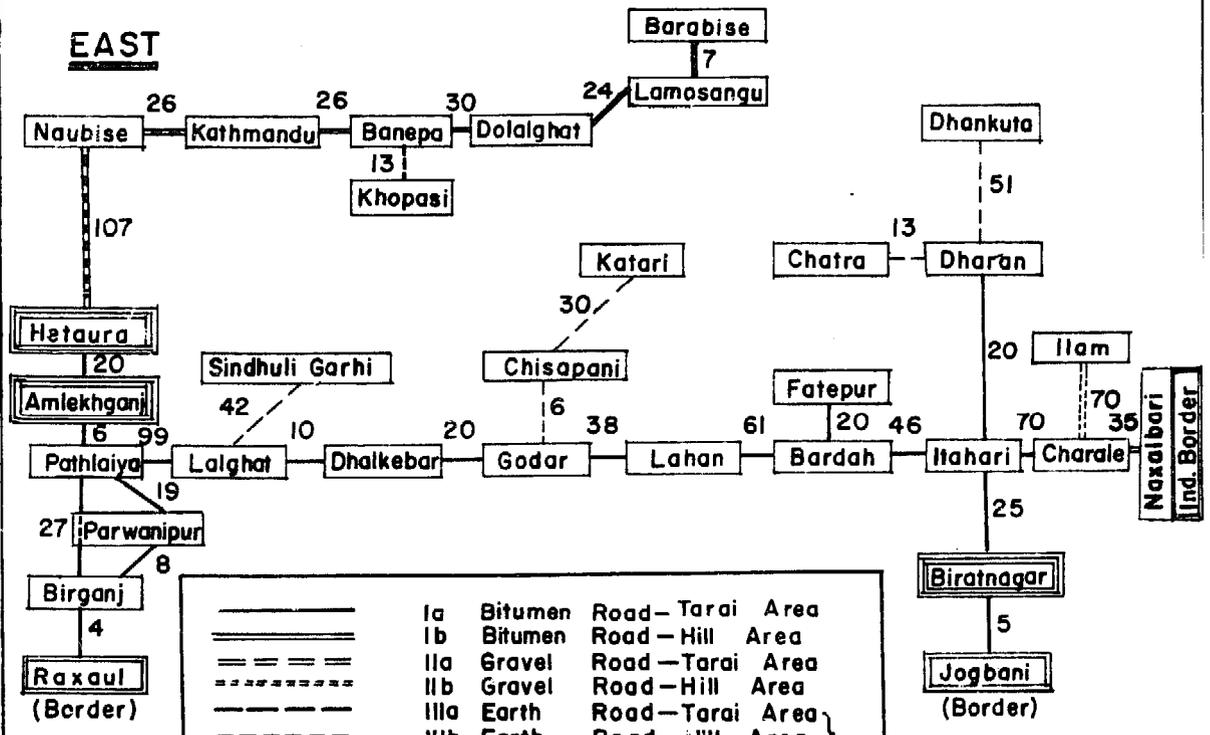

	Ia	Bitumen Road—Tarai Area
	Ib	Bitumen Road—Hill Area
	IIa	Gravel Road—Tarai Area
	IIb	Gravel Road—Hill Area
	IIIa	Earth Road—Tarai Area
	IIIb	Earth Road—Hill Area
		Dry season only
		Import point
		Fabrication and/or storage Centre

S A T A . Swiss Association for Technical Assistance


COST ESTIMATE

Planning of the Road Construction until 1984

No. : 7.602

Date : 23rd Febr. 77

Sig : *Jus Plokk*

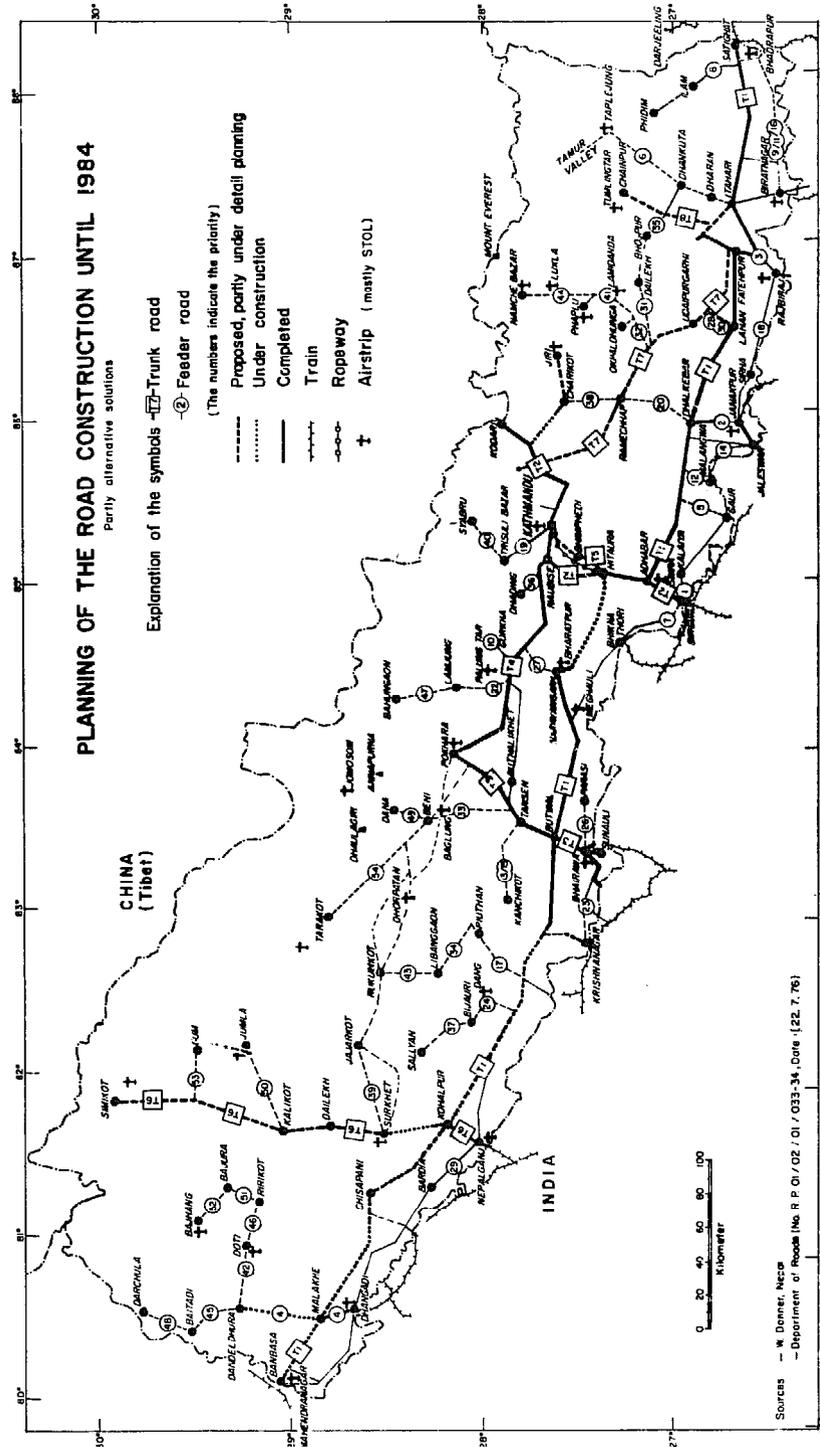


SATA, Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

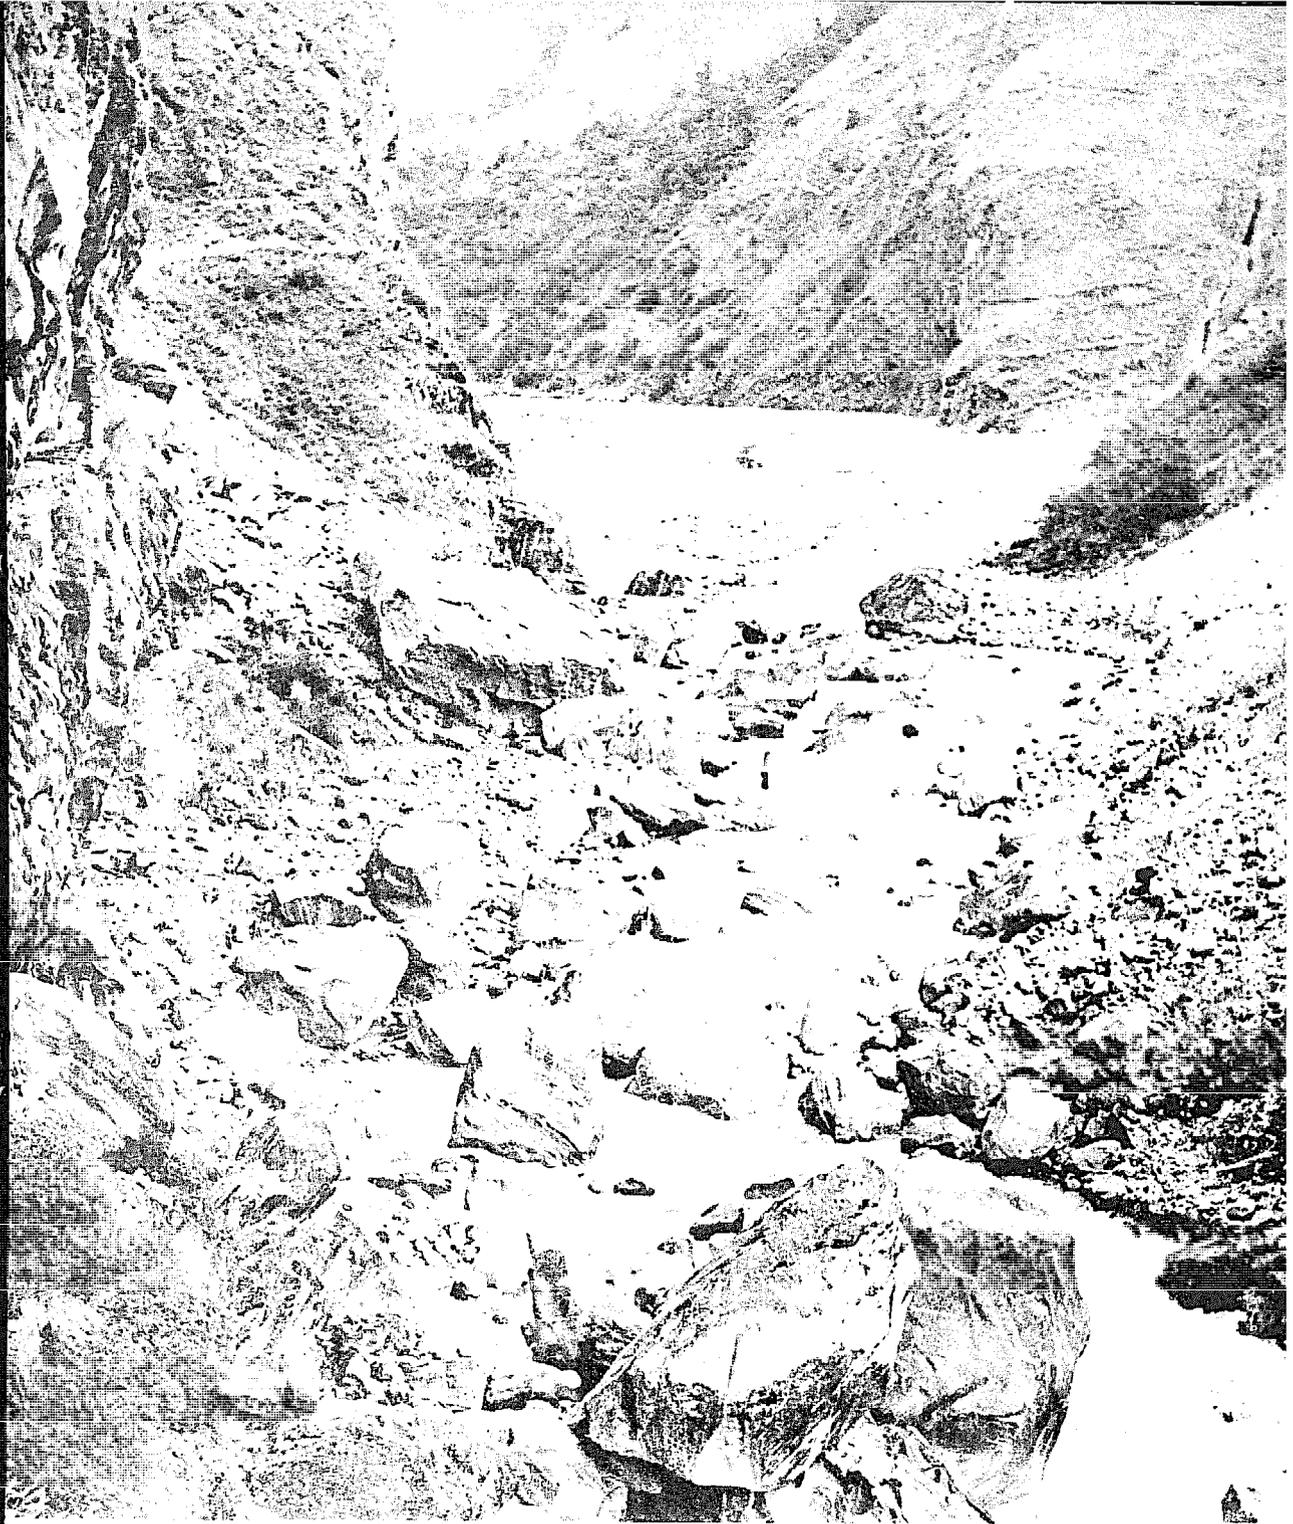

8. LAY OUT

LAY OUT OF A SUSPENSION BRIDGE
Fixing of the Bridge Position

No. : 8.101

Date : 28.12.76

Sig : *Cardan*

8.1 General


Before starting the lay-out try to find the pegs from the survey done. It may happen that the pegs from the first survey have disappeared. If that happened put new pegs and measure a profile along the new axis. How to do that see chapter 'Site Survey'.

8.2 Fixing of the Bridge Position

All required measurements are given in the general arrangement. The bridge position should be fixed very carefully in order to avoid difficulties in later construction stages. The procedure can be described as follows:

1. Find the existing pegs and bench-marks.
2. Measure the distance between these pegs and check if they are according to the measurements given in the general arrangement.

SKETCH 1:

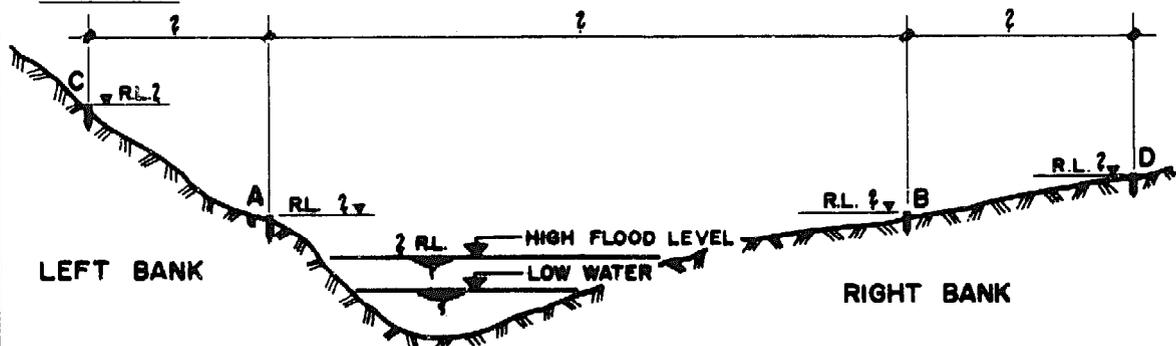

3. Now fix the tower axis on one river bank. From this point measure the span and fix the tower axis on the other bank. (Methods how to do that see chapter 'Site Survey'). Then check the elevation of these pegs and look if they are according to the elevation given in the general arrangement.


LAY OUT OF A SUSPENSION BRIDGE
Fixing of the Bridge Position

No : 8.102

Date : 28.12.76

Sig : *Caudian*

4. If all measurements are correct according to the general arrangement fix the positions of all blocks in the way as shown in the following pages.

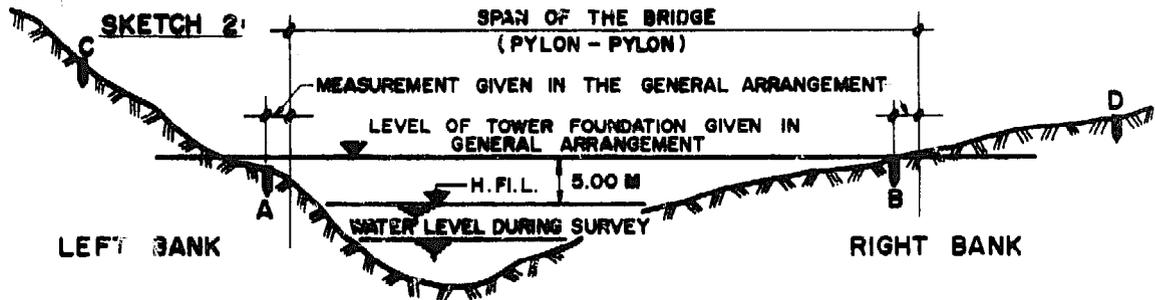


Sometimes it happens that you can't find the old pegs or that the first survey has not been done very exactly or that land slides have occurred at the proposed site. In that case you have to measure a new profile. Draw the again measured profile on tracing paper in the same scale as the general arrangement.

Now you can put the general arrangement under this profile and find out the best position of the bridge. It must be kept in mind that the tower-foundations should be placed:

- safe from river-scouring
- in a position that rock-excavations are minimal
- in a position that the volume of excavation and concrete-work remain small.

After finding the best position of the bridge in the drawing you can fix the bridge position at site, too.

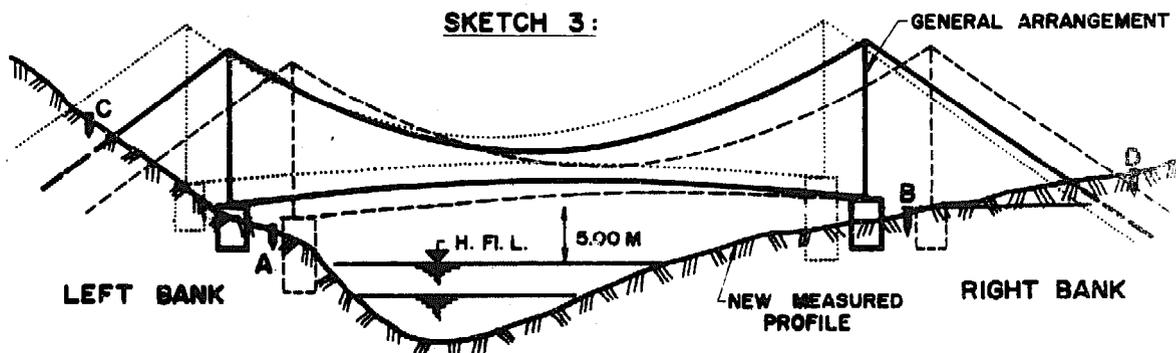

LAY OUT OF A SUSPENSION BRIDGE


Fixing of the Bridge Position

No. : 8.103

Date : 28.12.76

Sig : *Budhan*

SKETCH 4: All this measurements are given in the General Arrangement

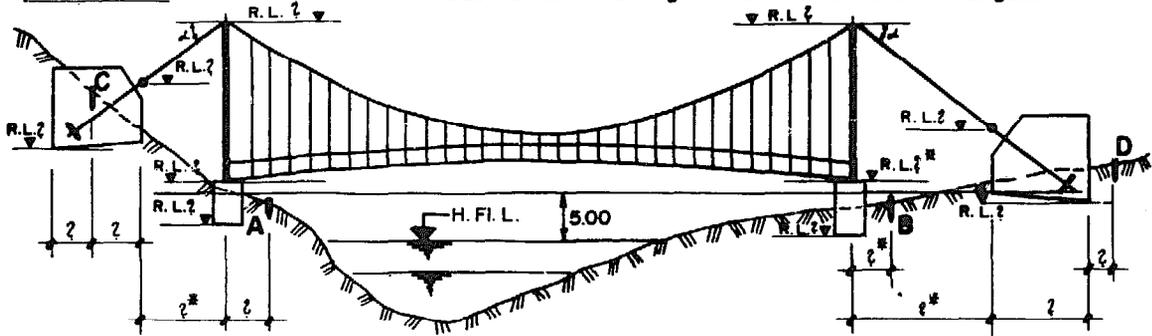

SAT A, Swiss Association for Technical Assistance

LAY OUT OF A SUSPENSION BRIDGE

No.: 8.104

Lay-out of the blocks
Main anchorage

Date: 8. 9.1975


Sig.: *H. S. ...*

8.3. Lay-out of the blocks

Already at the beginning of the bridge-construction this work should be done carefully and in a detailed way, in order to save time and to facilitate the control of the work for the whole construction-period.

Example for the lay-out of a main-anchorage


Section:

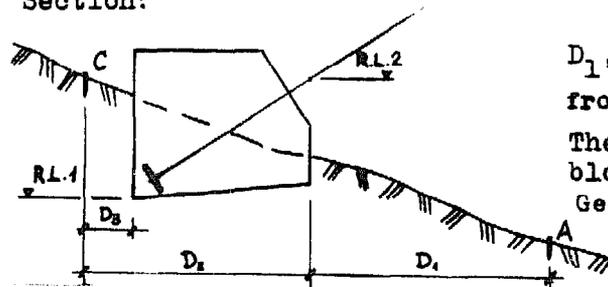

$D_1, D_2, D_3, RL 1, RL 2$ are known from General Arrangement

The dimensions of the anchorage-block are known from the General Arrangement and the Detail Drawings

Plan:

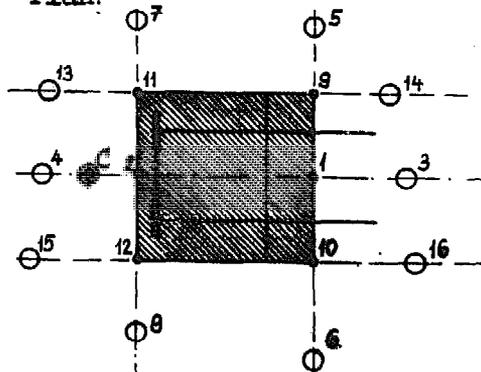

o = temporary pegs.
(1,2,9,10,11,12) They will disappear during the construction-work.

○ = permanent pegs.
(3,4,5,6,7,8,13,14,15,16) They should be safe or protected from any construction-obstructions.

- Measure along the bridge center-line the distance from peg "A" to the front edge of the anchorage-block and fix peg "1".
- Measure from peg "1" the length of the anchor-block and put peg "2".
- Check the distance from peg "2" to peg "C".
- Set up two additional pegs of the center-line at places safe from excavation-work (pegs "3" and "4").
- Starting from peg "1" put the pegs 5,9,6 and 10 for the help-line of the front edge. Do the same for the help-line of the back edge; from peg "2" the pegs 7,11,8 and 12 are fixed.
- With the help of the pegs "9" and "11" the help-line of the downstream edge is determined (pegs 13,14) and with the pegs "10" and "12" that for the upstream edge (pegs 15,16).

In this way the edges or the center-line can be checked at any time with the aid of a thread or a rope tied to corresponding points.

LAY OUT OF A SUSPENSION BRIDGE

No.: 8.105

Tower Foundation, Lay-out along a parallel to the bridge center-line


Date: 8. 9.1975

Sig.: *W. S. S.*

Example for the lay-out of a tower-foundation

This lay-out is done in a similar way as that for a main-anchorage. In addition, reference-pegs for the tower center-line should be set up (pegs 17 and 18 in the sketch).

Plan:

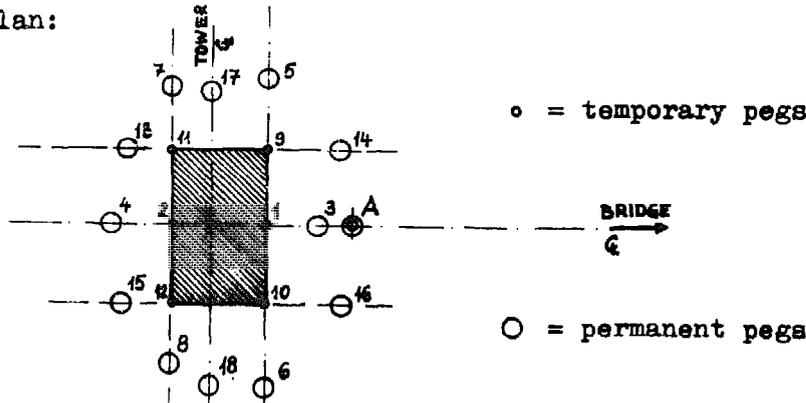


Lay-out with a parallel to the bridge center-line

A parallel-line to the bridge center-line is chosen, safe from all construction-works.

Measure equal distances, perpendicular to the bridge center-line, from peg "A" and peg "B" and fix the pegs "A'" and "B'".

On this help-line all the corresponding points for the positions of main-anchorage and tower-foundation can be placed (1', 2', 3', ...).

Sketch in plan:

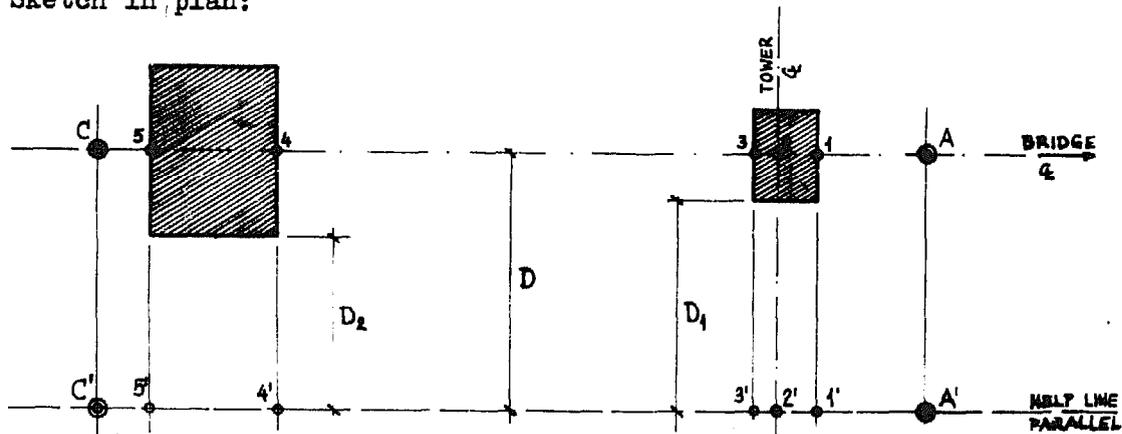

Thus the reference-lines for the front- and back-edges can always be fixed and checked easily with a theodolite. The reference-lines for the upstream- and downstream-edges may be fixed as proposed under 8.103 or with a theodolite and a measuring-tape (for the distances D_1 , D_2).

LAY OUT OF A SUSPENSION BRIDGE

No.: 8.106


Wind - Guy - Anchorage (I)

Date: 13. 9.1975

Fig.: D.S. 65

In the bridge-drawings the location of the wind-guy-anchorages is usually given in reference to the tower- and bridge center-line.

Sketch:

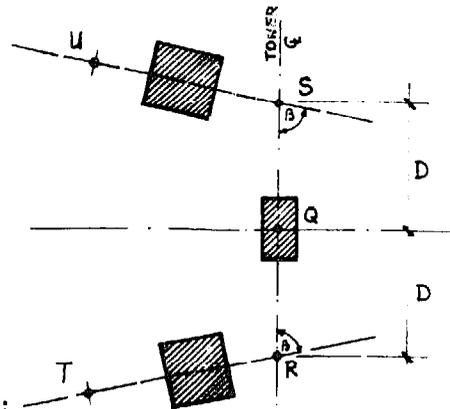


D = Distance along the tower center-line, from the bridge center-line to the wind-guy-cable.

β = angle between wind-guy-cable and tower center-line.

Proceeding:

- Measure from point "Q" along the tower center-line the distance "D" and set up the pegs "R" and "S".
- Measure the angle " β " in "R" (take as reference if possible the peg "R+" on the other bank) and fix point "T". Do the same from peg "S" and fix point "U". The lines "SU" and "RT" are the center-line of the wind-guy-anchorage.
- Fix the position of the anchor-block. Use a profile-drawing. The elevation of the anchor-rod is usually the same as the top of the tower-foundation. (see next sketch).

Sketch:

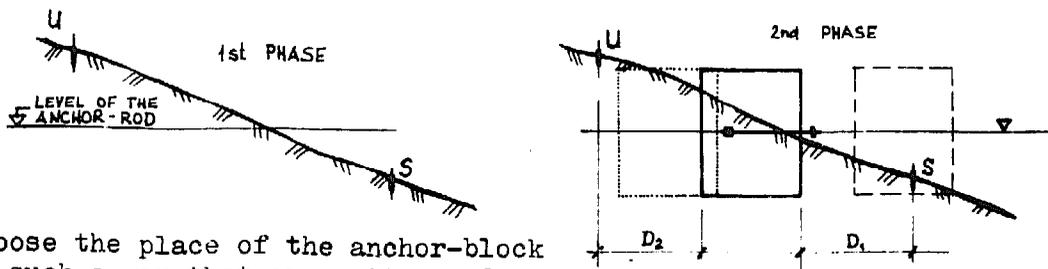

Choose the place of the anchor-block in such a way that excavation and concrete-work remain small.

D_1, D_2 - DISTANCES FOR THE LAY-OUT

Note: For the lay-out of a new line, in any angle to an already given line, the reference-point on this given line should be chosen as far away as possible, for example on the other river bank.

Near every foundation and anchorage, bench marks should be levelled as reference for the elevations. For this and for the measurement of horizontal distances on slopes please refer to the chapter "Survey Methods"

LAY OUT OF A SUSPENSION BRIDGE

No.: 8.107


Wind - Guy - Anchorage (II)

Date: 14. 9.1975

Sig.: *D.S. Shrestha*

If it is not possible to measure along the tower center-line due to obstacles (rock, trees..), the lay-out can also start from any other point of the bridge center-line (from Q_1, Q_2, Q_3, \dots).

Sketch in plan:

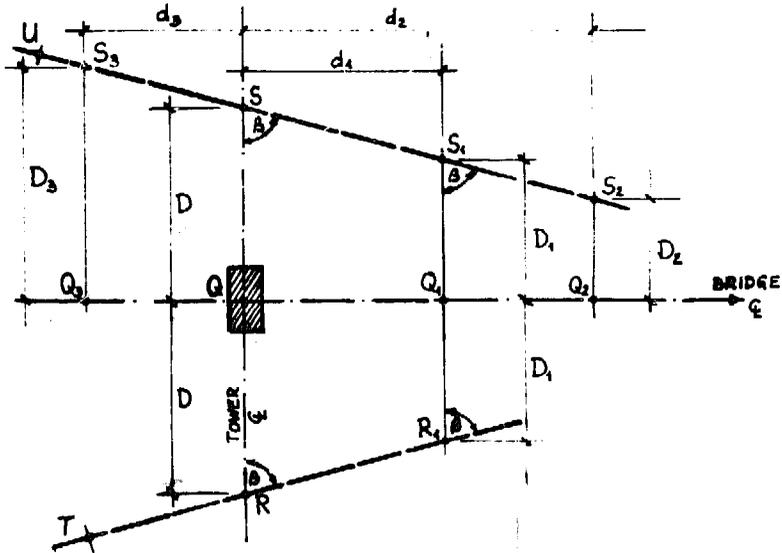

Example: For " Q_1 "

- Calculate the distance " D_1 " from " Q_1 " to " R_1 " and " S_1 ".


$$D_1 = D - d_1 \times \cot \beta \quad (D_3 \text{ would be : } D + d_3 \times \cot \beta)$$
- Fix the pegs " R_1 " and " S_1 ".
- Measure on these points the angle β and set up the pegs " R ", " S ", " T " and " U ". (Distance " R_1R " = $\frac{d_1}{\sin \beta}$)
- Fix the location of the anchorage-block (see 8.105).

Remark:

The point " Q_1 " can also be in the river-bed if for one reason or the other it will facilitate the lay out.

For the wind-guy-anchorage, help-lines and reference-points are fixed similarly to the main-anchorage. (see 8.103).

A bench mark should be set up for the check of the elevation.

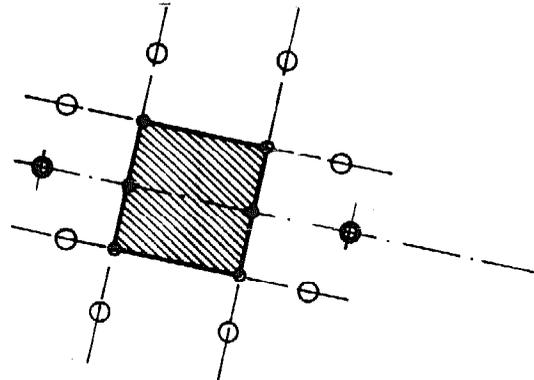

See also chapter "Survey Methods",

LAY OUT OF A SUSPENDED BRIDGE


No : 8.201

Date : 25.12.74

Sig : *Budhan*

The lay out of a suspended bridge can be made in a similar way as the lay out of a suspension bridge. There are only some differences in the given measurements. So the given span is not measured from tower to tower (there are no towers) or from drum to drum. The span is measured from the front of the foundation on the left bank to the front of the foundation on the right bank.


SKETCH 5:

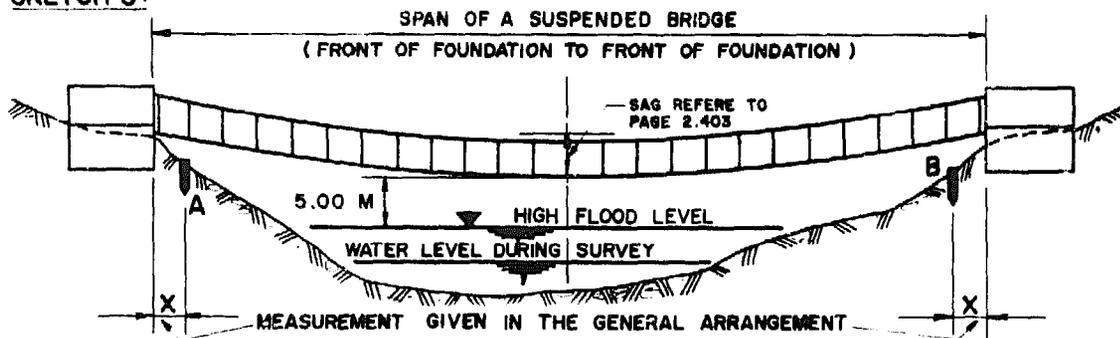

The fitting of the position of the windguy-anchorage can be done in the same way as shown under Suspension bridge.

Example for the lay out of the main anchor block

Example for the lay - out of a main anchor block

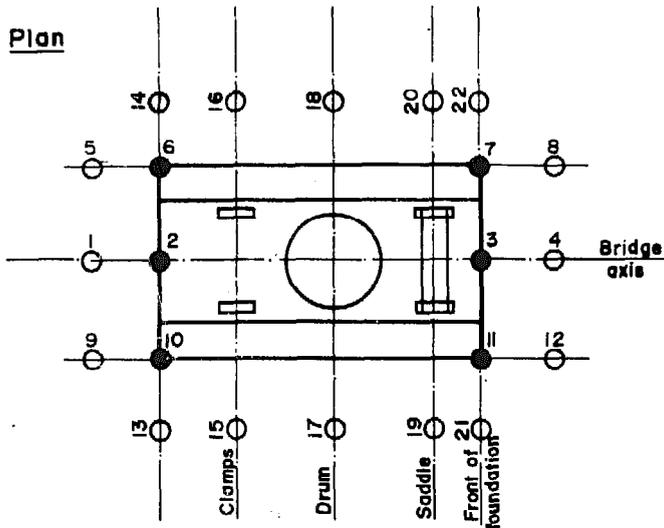

○ Permanent pegs

They should be safe or protected from any construction - obstruction


● Temporary pegs

They will disappear during the construction work

- The dimensions of the anchor block are known from the detail drawings
- The positions of the steel parts are known from the LAY-OUT drawings

- Fix on the center-line the front of the foundation (peg 3).
- Measure from peg 3 the length of the foundation and put peg 2.
- set up two additional pegs of the center-line at places safe from excavation work (pegs 1 and 4).
- starting from peg 3 put the pegs 21, 7, 11, 20 for the help-line of the front edge. Do some for the help-line of the back edge; from peg 2 the pegs 14, 6, 10 and 13 are fixed.
- with the help of the pegs 6 and 7 the help-line at the down stream edge is determined (pegs 5 and 8) and with the pegs 10 and 11 that for the upstream edge (pegs 9 and 12).
- fix the axis lines of the clamps, the drum and the saddle (pegs 15, 16 and 17, 18 and 19, 20).

In this way the edges or the center-line can be checked at any time with the aid of a thread or a rope tied to corresponding points.

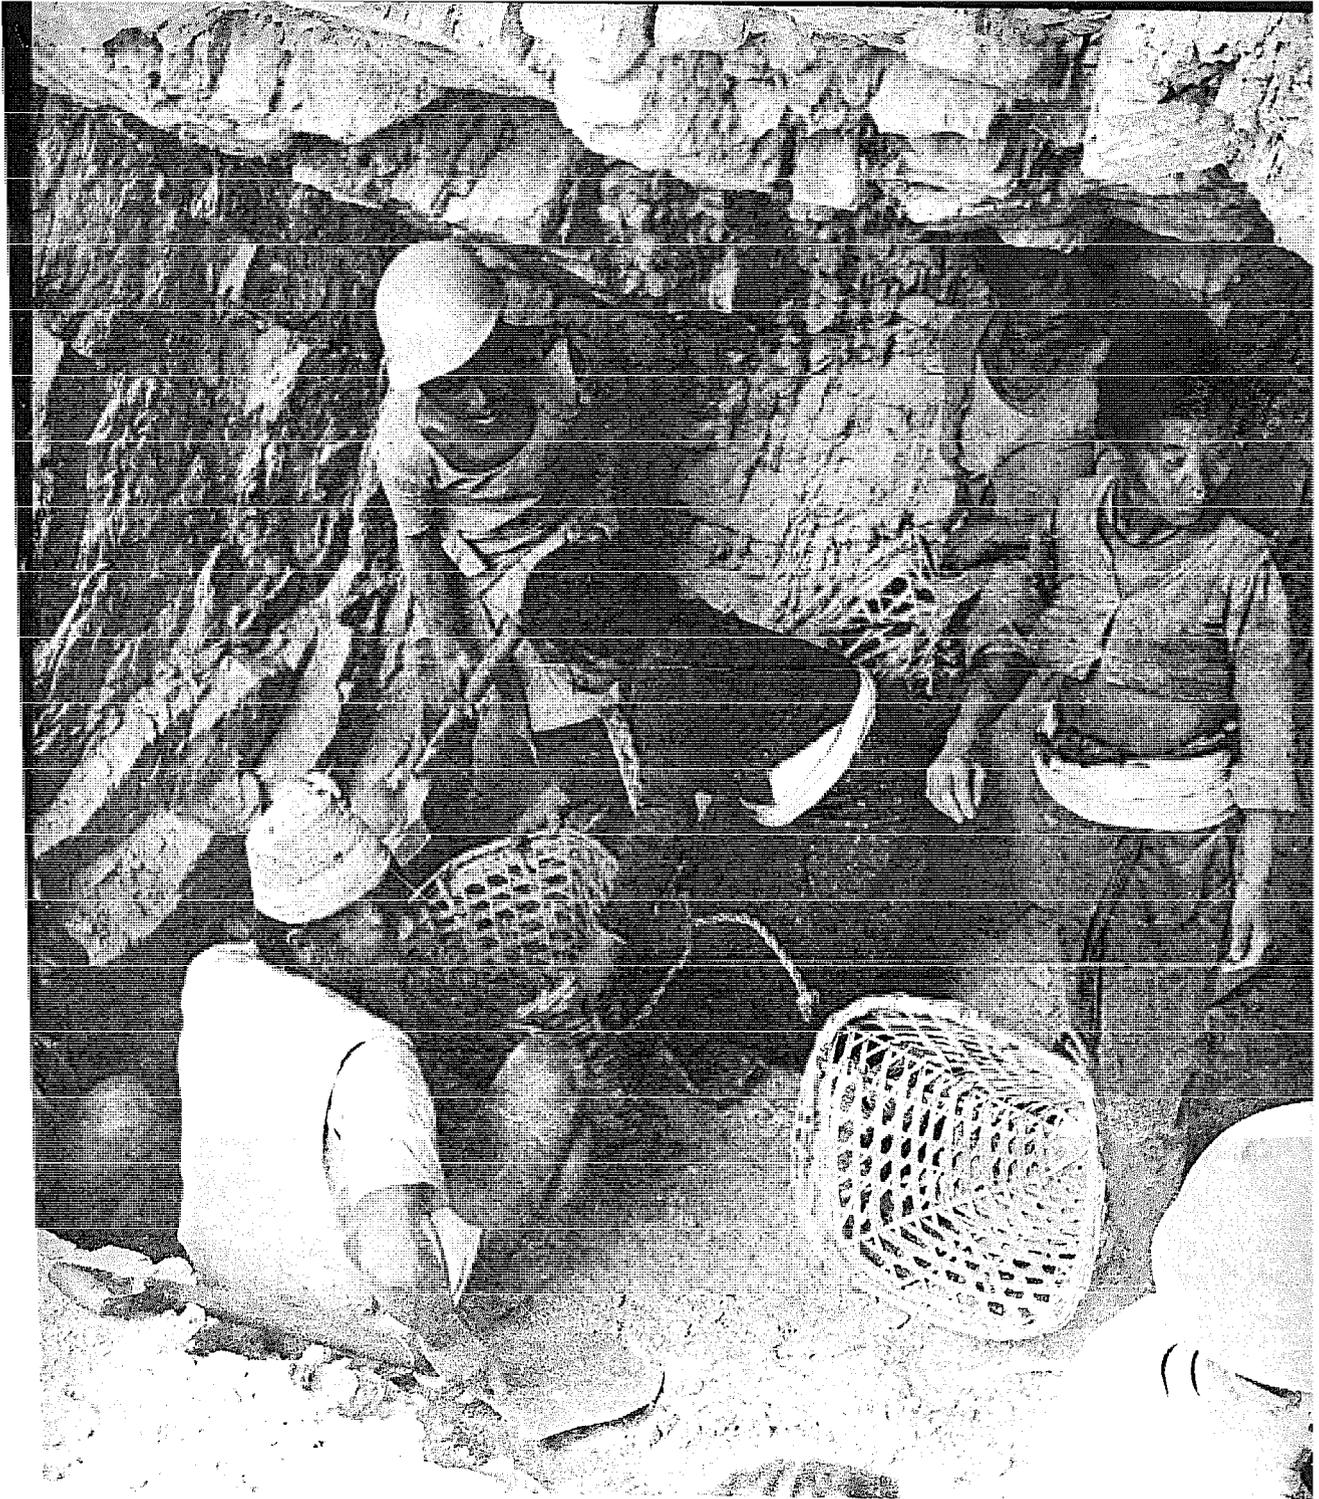

9. CONSTRUCTION WORK

CONSTRUCTION WORK

General, Collection of Materials

No : 9.101

Date : 26th Feb, 77

Sig : *Pandey*

General

Included in this chapter will be all works required at site after finishing the lay-out up to the erection of the bridge. One of the most important points which must be remarked, is the erosion. We should try to prevent erosion during construction work and also afterwards. The best way to prevent erosion is to open the excavation only for a short time. So excavation, concreting and refilling is one working process. The refilling is one of the most important works. Some methods, how to do it, are shown in this chapter.

9.1. Collection of Materials

The quantities of all materials are given in the Cost Estimate or can be calculated out of the quantities given in the detail drawings. Store the collected materials near the places where they will be used afterwards. So you do not have to carry them too far during the construction period. Also do not collect too high quantities of each item.

Required Materials

Rubbles: Rubbles are bits of broken stones, rock or brickwork. Stones from a riverbed, coarse gravel (30 - 55 mm) e. g. You can also get them out of rock excavation materials.

Stones: The size of the stones should be from 40 to 100 mm. If you have rock excavation, you can often use broken stones out of this excavation. Stones shall be hard, sound, durable and clean. All stones should be free of sand, dust, salt, lime, clay or other deleterious matter.

Gravel: The gravel can be found in the riverbeds or can be made by breaking stones. Also they should be clean and free of earth. The required size can be obtained by sieving. The smallest size of gravel is about 5 mm.

Sand: The sand can usually be found in the riverbeds. To get the right size and to clean it we have to sieve it. If the sand location is quite far away from the site, the crushing of stones to get sand might be the cheaper way. A careful comparison should be made.

Sand shall be evenly graded from fine to coarse particles to maximum 3/16" (5 mm) of which

10 - 30 % should pass through a sieve of 52 meshes per sq.inch. and not more than

10% should pass through a sieve of 100 meshes per sq.inch.

Sand should be gritty, hard particles, free from dust, clay, animal, vegetable or other organic matter.

A list about which kinds of materials are useful for construction work is given in the chapter "Soil investigation" on page 4.307

CONSTRUCTION WORK

No : 1.201

Excavation, normal Excavation
and Trench Excavation

Date : 20th Feb, 77

Sig : *Pandeyan*

There are different types of Excavation required for the work on Suspension and Suspended Bridges. As the normal excavation, the trench excavation and the rock excavation. On the General Arrangement and on the detail drawing there is remarked what kind of excavation you need. The instructions given on these drawings must be followed very strictly, because in the calculation of the blocks these points are included. So if you do not make the excavation according to the drawings, the designed blocks might be too small (due to lack of earth resistance) and the safety factor too little.

The main thing you have to make sure is that you do not make too big excavations in order to save work and not to disturb too much the soil in place and to prevent erosion.

Normal Excavation

If there is no special mention in the General Arrangement as well as in detail drawings, we have a normal excavation according to the block and the conditions at site. The most important point to remark is that sometimes we have blocks with a bottom which is not horizontal but in shape. We call this type "inclined bottom". So also the foundation has to be made with an inclined bottom. Do not make a horizontal excavation and refill it afterwards. In this way we do not get the required effect with this shape. With this shape in the excavation we can increase the factor of friction between the block and the earth and so save concrete. (See factor of friction for inclined bottom on page 3.708)

Trench excavation

A trench excavation is an excavation with vertical faces. The foundation must be exactly the size of the block. If we need this kind of foundation this is mentioned in the General Arrangement or detail drawings. Sometimes this is not possible to make due to the soil conditions. So the refilling has to be made in layers of 20 cm thickness and these layers have to be compacted very well so that the refilling keeps the passive earth pressure (earth resistance) resulting as re-action from the block. These refillings have also to be covered by picking so that erosion should not damage the ground surface.

CONSTRUCTION WORK

Rock Excavation, Drilling and Blasting, Rock Anchor

No. : 9.202


Date : 26th Feb. 77

Sig : Pandey

Very often we have to make rock excavation for our foundations. In soft rock we can go on with the excavation in the same way as in the earth. In hard rock this is not possible. Often excavation by manpower is not possible. So we have to make the excavation by blasting. If the rock is hard we do not have to make much excavation. Then we can connect the concrete block with the rock with some rock anchors. Sometimes also the anchor parts are fixed directly on rock anchors.

Depending on the kind of rock we also design special types of foundations. In this way we can often save a lot of concrete. Some types of rock anchorage utilizing rock resistance in an excavated hole and utilizing drilled rock holes are shown on page 3.605

Please take reference to page 3.201.

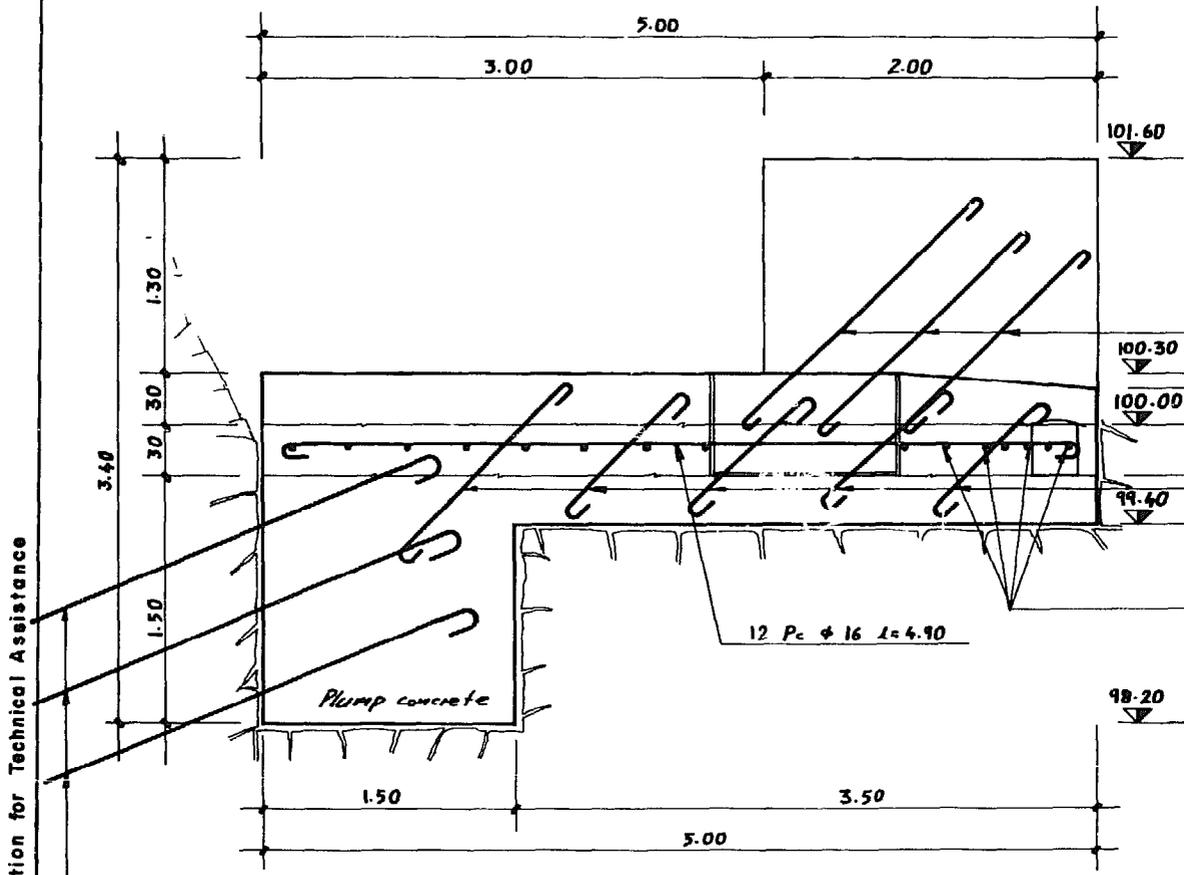

S A T A , Swiss Association for Technical Assistance

CONSTRUCTION WORK

No.: 9.203

Rock anchor, Purpose, description, material list, fitting and test

Date: 7.11.75

Sig.: *Arjun*


1. Purpose by using rock anchors

Instead of anchoring cables on concrete blocks, reliable hard rock found at site can be used as an anchorage medium with the help of rock anchors. This will considerably reduce costs and help to speed up the work.



Rock anchors used for main cable anchorage
Tatopani (Budhi Gandaki), 1974

2. Short description of a rock anchor system

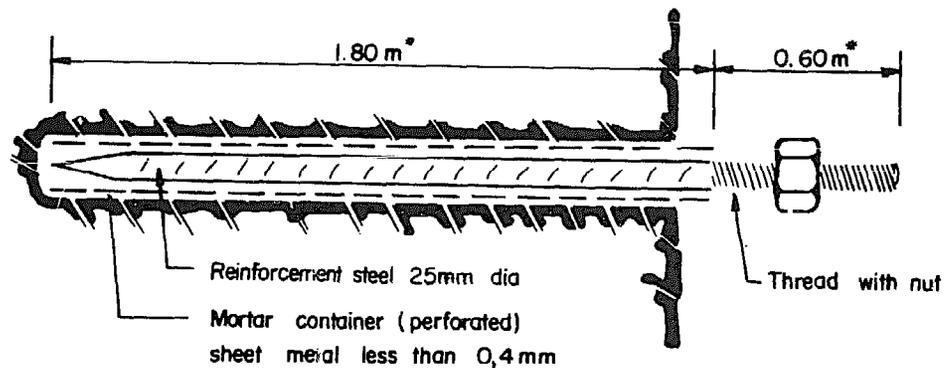

* Length as used in ordinary cases

CONSTRUCTION WORK


Rock anchor, Purpose, description, material list fitting and test

No. : 9.204

Date : 27.2.77

Sig : Pandey

Section of anchor

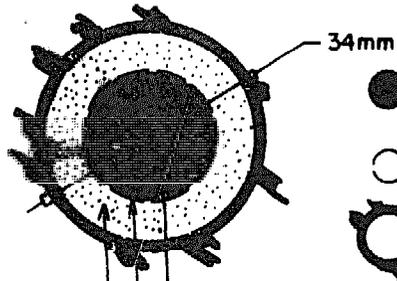

Example : Calculation of mortar quantity

item	dia (mm)	area (cm ²)
anchor rod	25	4,9
mortar container (quantity of mortar)	23	4,2
bore hole	34	9,1

Anchor rod, 25mm ribbed Torsteel

Mortar container

Mortar pressed out through the holes of mortar container during insertion of anchor rod

The above mentioned rock anchors and mortar containers were already manufactured by various workshops

3. Material list for anchor fitting

Rock anchors with length according design

Perforated mortar containers, 2 half shells per anchor

Drilling machine and accessoires

Drill rod with bit diameter min. 34 mm

Galvanized wire for binding the mortar container

Cement

Steel pan (coray)



Bucket

Plastic tube 1/2" dia, 5 m long

Towel (mason's mortar shovel)

Hammer 5 kg

4. Fitting the anchor

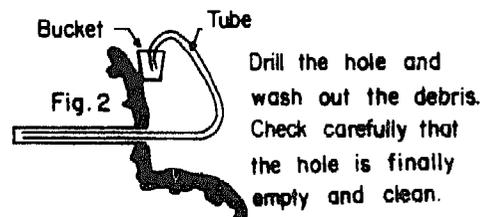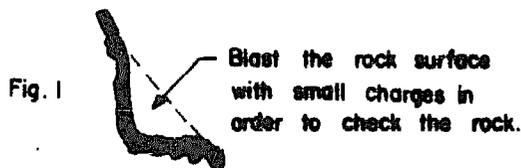

CONSTRUCTION WORK

Rock anchor, Purpose, description, material list, fitting and test

No.: 9.205

Date: 7.11.75

Sig.: *Dubnami*

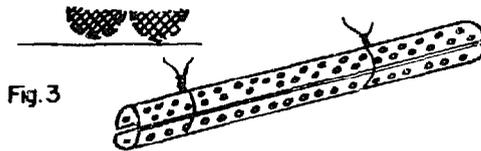


Fig. 3

Fill the 2 mortar containers with a mixture of cement and water forming a paste not too liquid and not too thick. Close and bind them with wire.


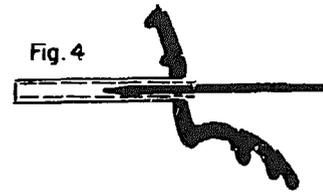


Fig. 4

Insert the mortar container and hammer the anchor rod into it.



Filling mortar containers .

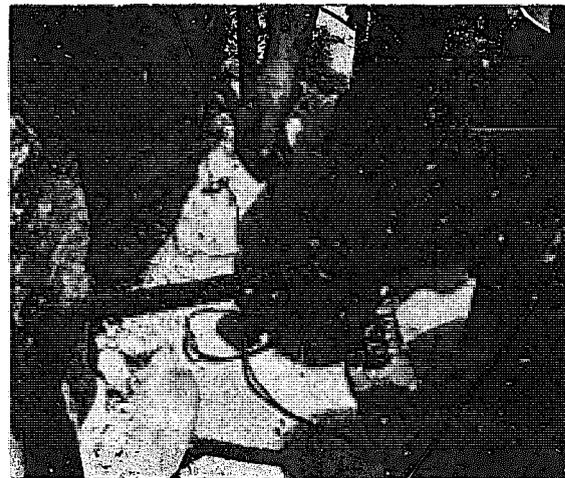

Inserting of mortar container into the bore hole



5. Test of rock anchors

(after 14 days)

A number of tests have been done and an ultimate breaking load of 15-20 tons was found, depending on quality of the steel rod and the root dia of the thread. Bond strength never fails. With a safety factor of 3, the working load is recommended to be 5 tons per anchor.

Left:

Tatopani bridge (Budhi Gandaki)
The anchors were tested with a centre hole hydraulic press to 10 tons (50% of ultimate breaking load).

CONSTRUCTION WORK
Concrete and Masonry Work

No. : 9.301

Date : 26th Feb, 77


Sig : Pandey

In the concrete, the addition of water is one of the most important points. To get a good concrete we should work with a small quantity of water. But neither too little a quantity because if the mixing is too dry it will be difficult to work with it. To obtain a correct addition of water the engineer or overseer must have a good portion of insistence and a very firm stand in order to overcome the laziness of the group working with the cement.

The specifications of the concrete and the mixing proportions are given in chapter 5, "Construction Materials". All the quantities given there have to be considered very well because they fix the kind of concrete and the allavailable compressible tensions, bond stresses, shedding which are taken into consideration in the calculations.

Take also big care to the stones and boulders added to the concrete. They should be clean and wet during concreting. If that is not so, we do not have a good connection and so no good concrete. So it might even be possible that the block will not be strong enough to keep the forces resulting from the bridge.

The bedding of the steelparts into the concrete is also very important. All measures required can be taken out of the Lay-out drawing from HMG Standard Designs or out of the Working-Detail-Drawings. This operation shall not be carried out until the steelwork has been finally levelled and plumbed; if necessary support the steelparts with rocks. or bamboo and immediately before granting the space under the steel shall be thoroughly cleaned. Around the steel parts there should be rich concrete in a thickness of at least 10 cm. On the following pages there are given some examples of anchor blocks. All the things mentioned in the drawings are required and should be considered at site.

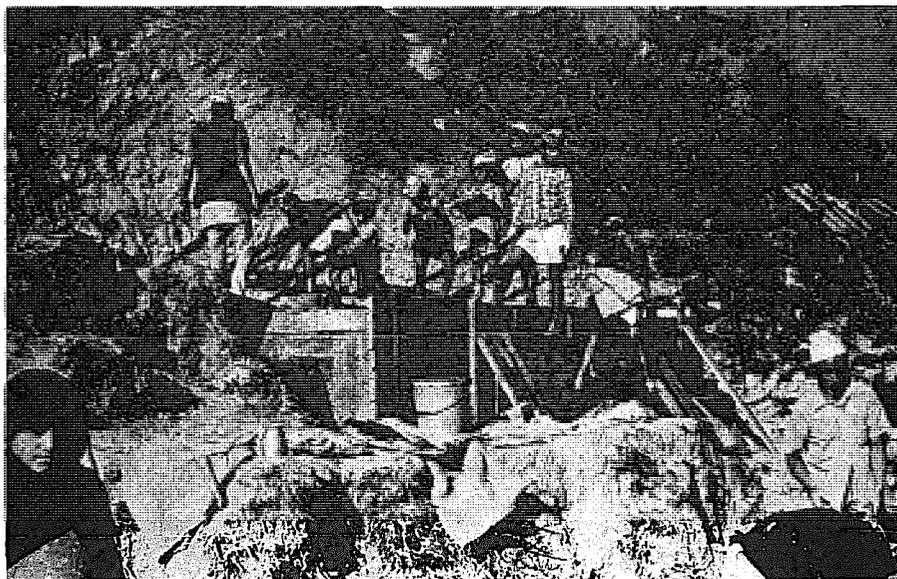

CONSTRUCTION WORK


Main Anchorage Block of a Suspension Bridge

No. : 9.302


Date : 27.2.77

Sig : *budhan*


PLAN

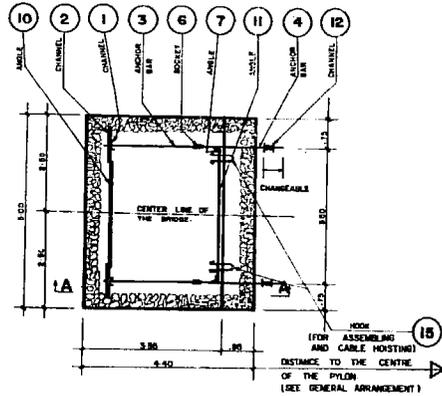


FRONT ELEVATION

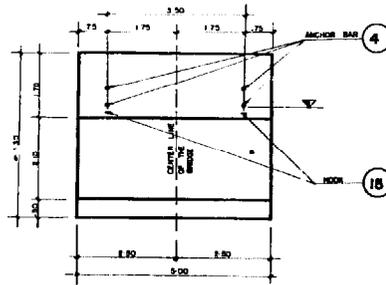

SIDE ELEVATION

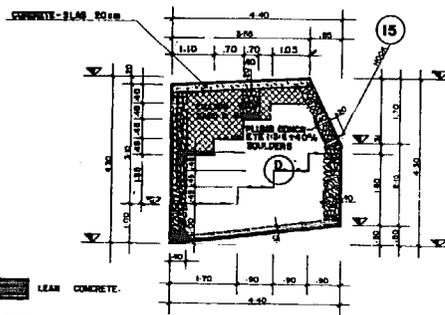

SECTION A-A

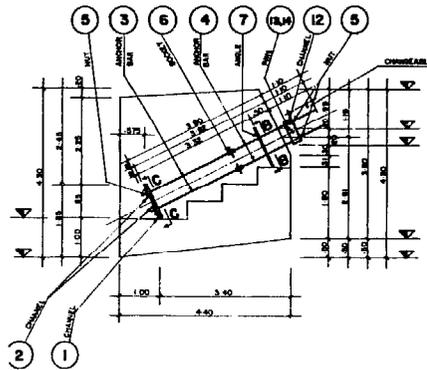

- LEAN CONCRETE.
 - STONE MASONRY.
 - (FORMED CONCRETE) PLUMB CONCRETE 1:3:6 + 40% BOLDERS.
 - FILLING WITH SAND AND STONE.
 - MASS CONCRETE 1:6 (CONCRETE SLAB).
- VOLUME OF ONE ANCHORAGE BLOCK = 63.379 M³
- STONE MASONRY USED AS SHUTTERING = 26.190 M³
 - LEAN CONCRETE = 2.214 M³
 - MASS CONCRETE = 3.605 M³
 - PLUMB CONCRETE = 43.921 M³
 - FILLING WITH SAND & STONE = 10.449 M³

S A T A , Swiss Association for Technical Assistance


CONSTRUCTION WORK

Main Anchorage of a Suspended Bridge


No. : 9.304

Date : 27.2.77


Sig : *landan*

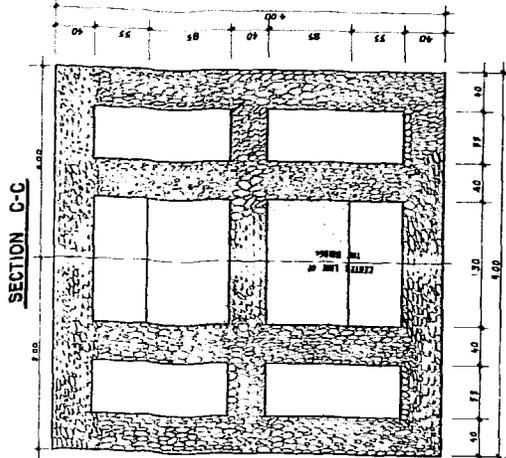

SECTION C-C

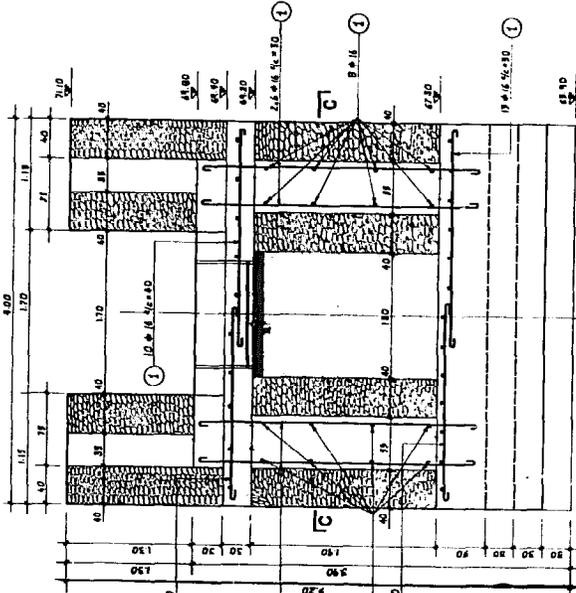


SECTION B-B

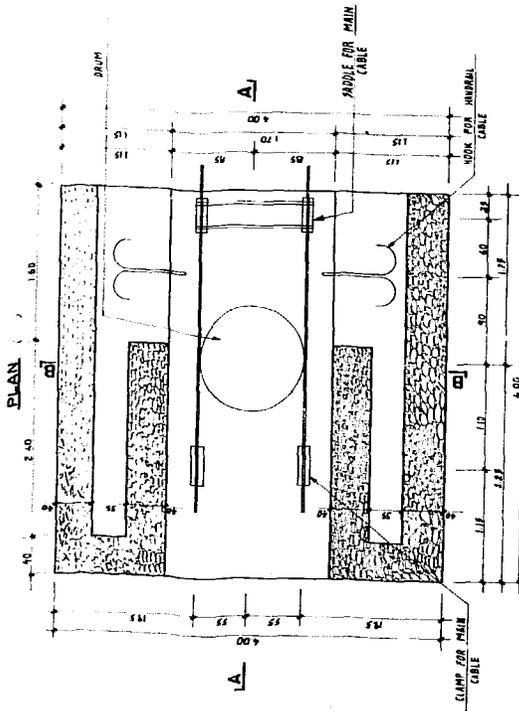

PLAN

SECTION A-A

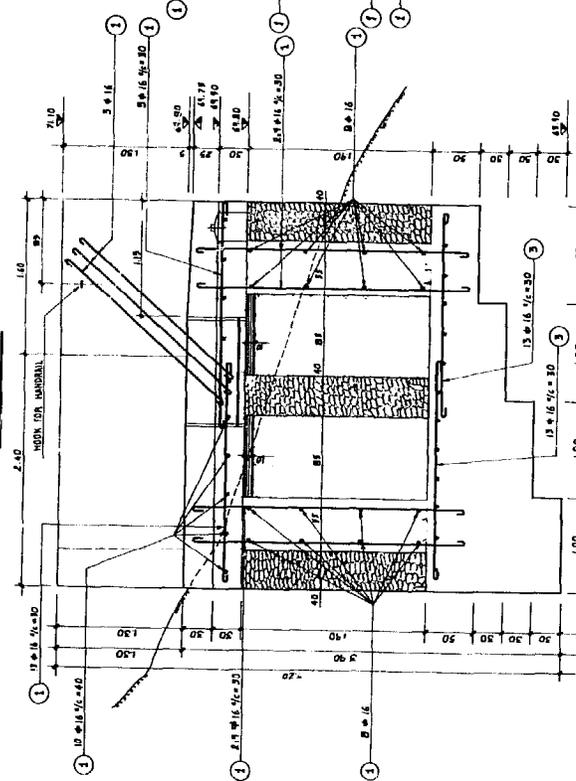

REINFORCEMENT STEEL SUPPLIED BY WORKSHOP REFER TO DWG. NO. 524-4

CONSTRUCTION WORK


Windguy Anchorage

No. : 9.305


Date : 27.2.77

Sig : *Pandey*

SECTION A-A

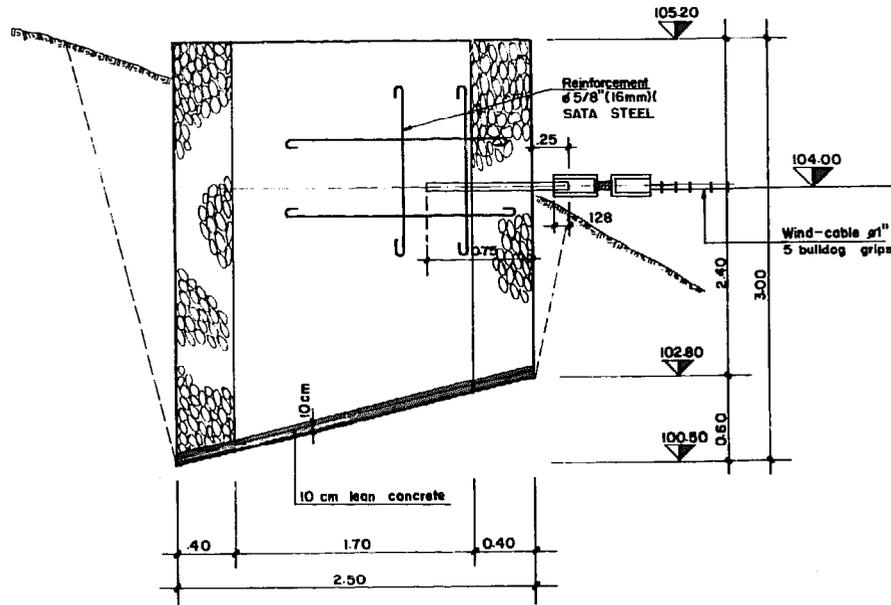

PLAN

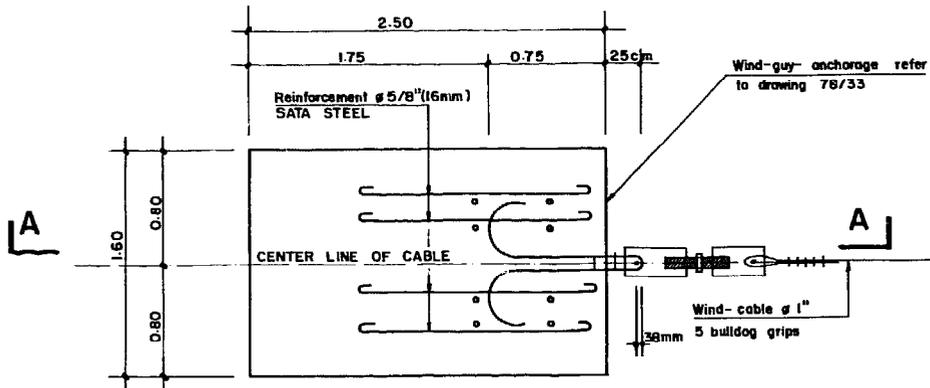

S.A.T.A., Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

CONSTRUCTION WORK

Concrete and Masonry Work


No. : 9.306

Date : 26th Feb, 77


Sig : Pandey

After reaching a certain level in concreting, we have to fix the reinforcement steel. The positions of the reinforcements are given in the Working Drawings and reinforcement lists. The most important point to consider is that the holding down bolts of the Pylons are well connected with the reinforcement steel. So the vertical reinforcement should be placed around the holding down bolts in order to keep the negative bearing forces.


SECTION B-B

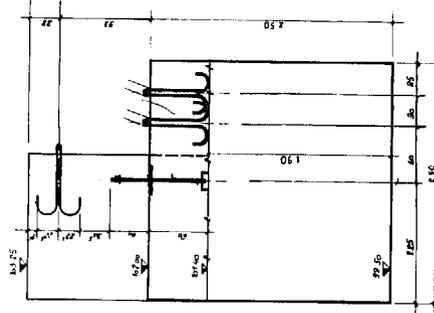


SECTION C-C

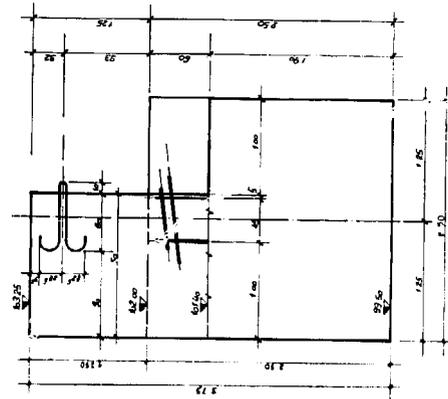

SECTION A-A

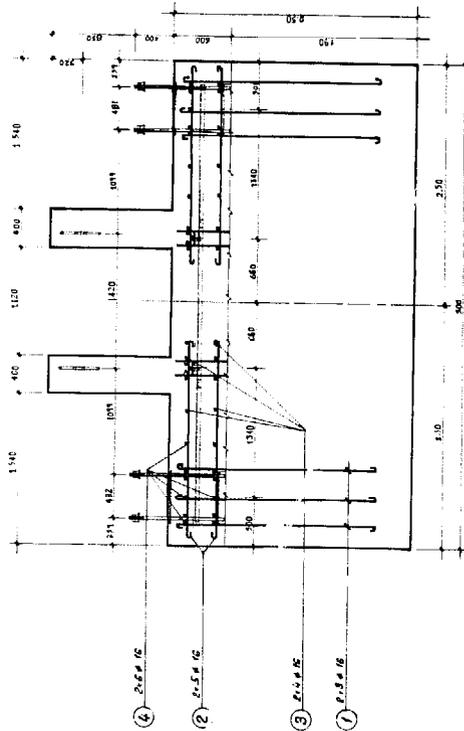

PLAN

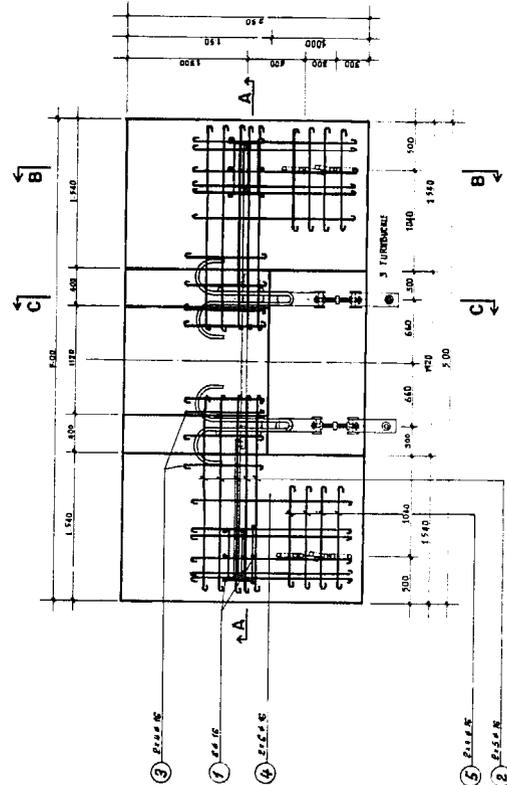

SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

CONSTRUCTION WORK

Concrete and Masonry Work

No. : 9.307


Date : 26th Feb, 77

Sig : *Paudyal*

Now the anchor parts remain which must be fitted into the anchor blocks. All measures required are mentioned in the layout drawings and Detail Drawings of the HMG Standard Design. On the following pages there are some examples of foundations from Suspension Bridges as well as for Suspended Bridges.



Pylon Base Plate of a Suspension Bridge

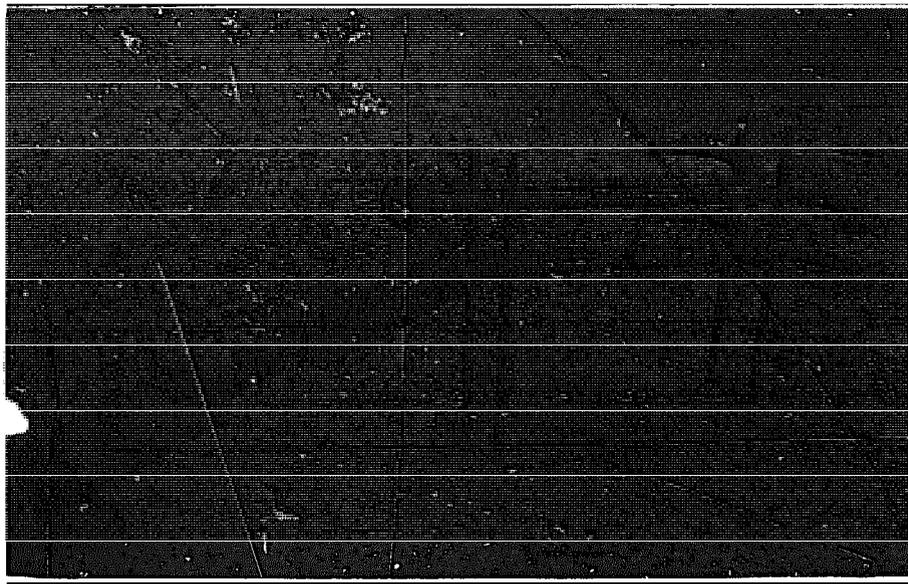

Spanning Cable and Fixation Cable anchorage hooks of a Suspension Bridge

CONSTRUCTION WORK


Lay Out of a Suspension Bridge

No. : 9.308

Date : 27.2.77


Sig : *landan*

WINDSUY ANCHORAGE
CAPACITY IN TONS

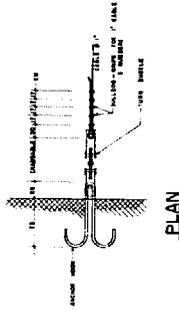


PLAN

SIDE ELEVATION
WINDSUY ANCHORAGE
CAPACITY IN TONS




PLAN

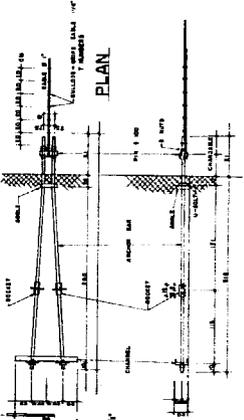

SIDE ELEVATION



DETAIL




FRONT ELEVATION OF
THE PYLON



WALK-WAY

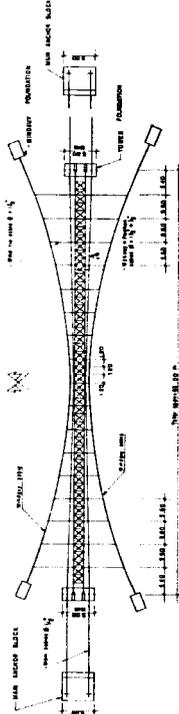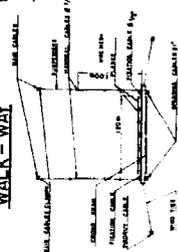


PLAN

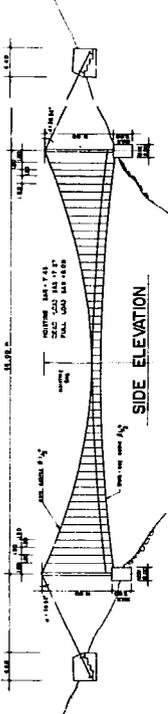

SIDE ELEVATION

WALK WAY AND PYLON ANCHORAGE

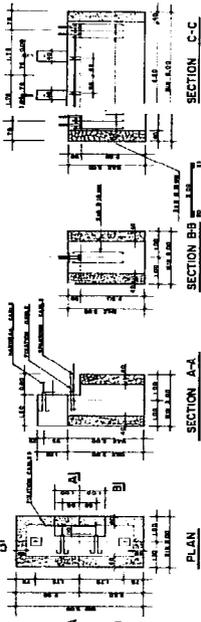

SECTION C-C

SECTION BB

SECTION A-A

PLAN

- STEEL REINFORCEMENT
- PLAIN CONCRETE
- CONCRETE
- WOOD

SATA, Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge

Division

CONSTRUCTION WORK

Fotos of Anchorage parts of a Suspended Bridge


No. : 9.309

Date : 27.2.77


Sig : *bandan*



Saddle, Drum and Clamps of a Suspended Bridge

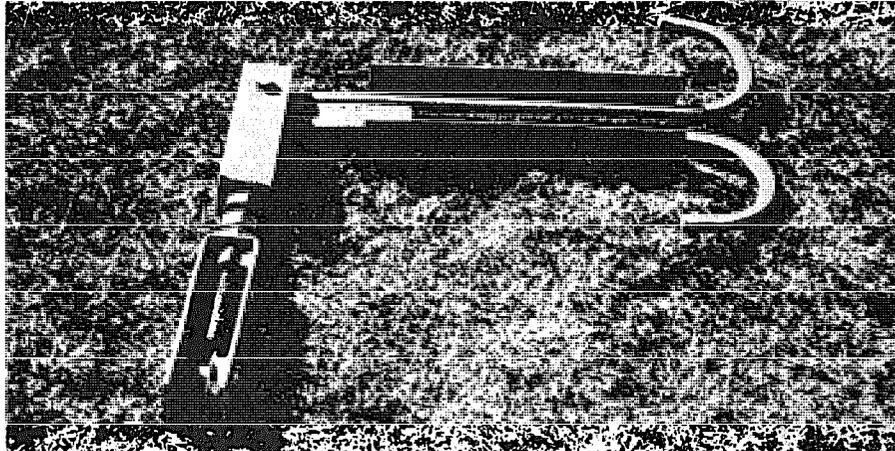

Handrail Cable Anchorage Hook of a Suspended Bridge

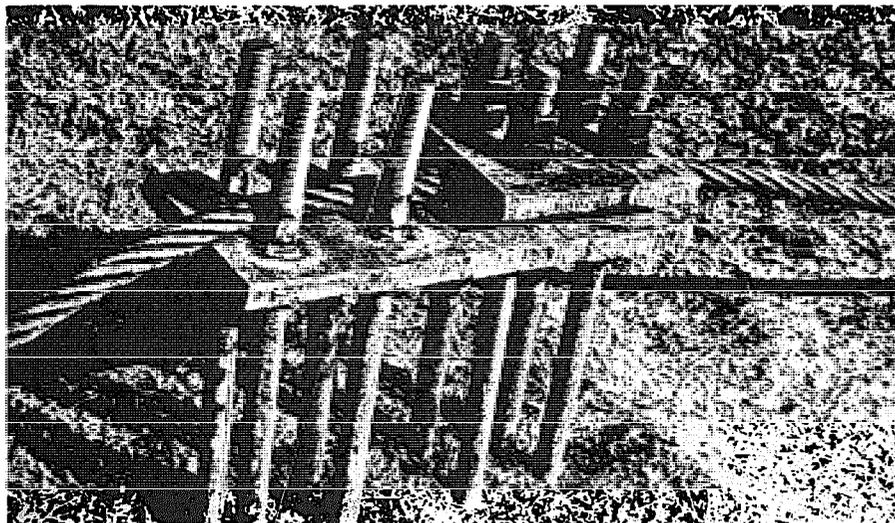

Clamp of a Suspended Bridge

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

CONSTRUCTION WORK

Lay out of a Suspended Bridge


No. : 9.310

Date : 27.2.77

Sig : *landi au*


MAIN ANCHORAGE

PLAN

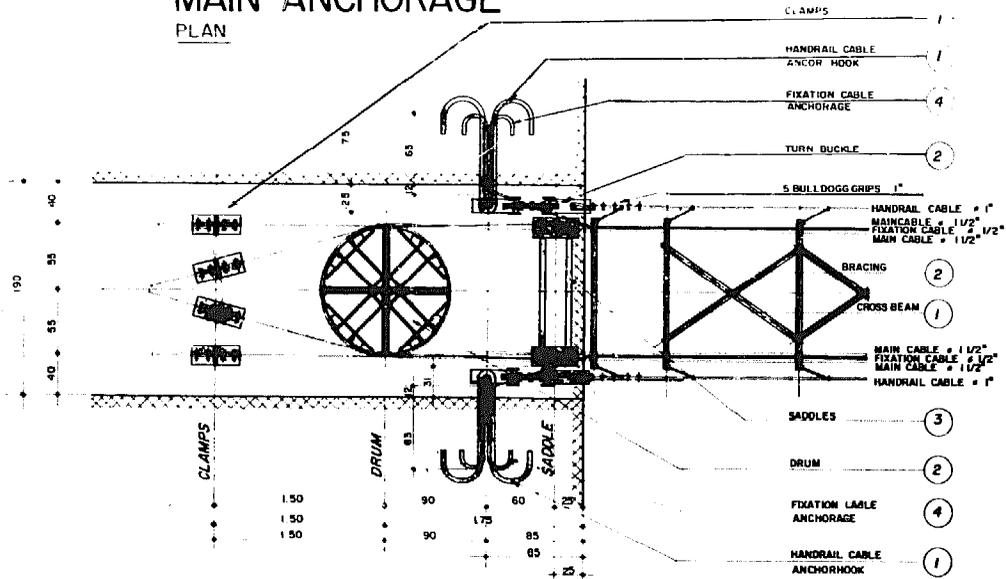

ONE CABLE END HAS TO BE TURN ROUND 3 TIMES

SECTION

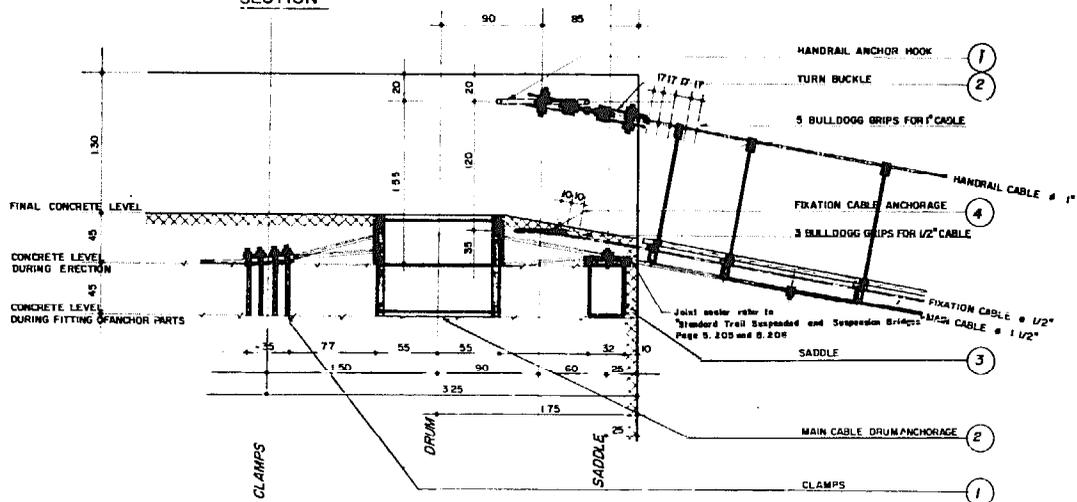

SAT A, Swiss Association for Technical Assistance

CONSTRUCTION WORK

Fitting of a Main Anchorage (I)

No: 9.311

Date: 15.9.1975

Sig: *[Signature]*


In the sketch below are known from the design-drawings:

$L_1, L_2, L_3, \dots H_1, H_2, H_3, H_4,$

S_1, S_2, S_3, \dots

from the lay-out: $D_1, D_2, \dots R.L. 1$

Sketch:

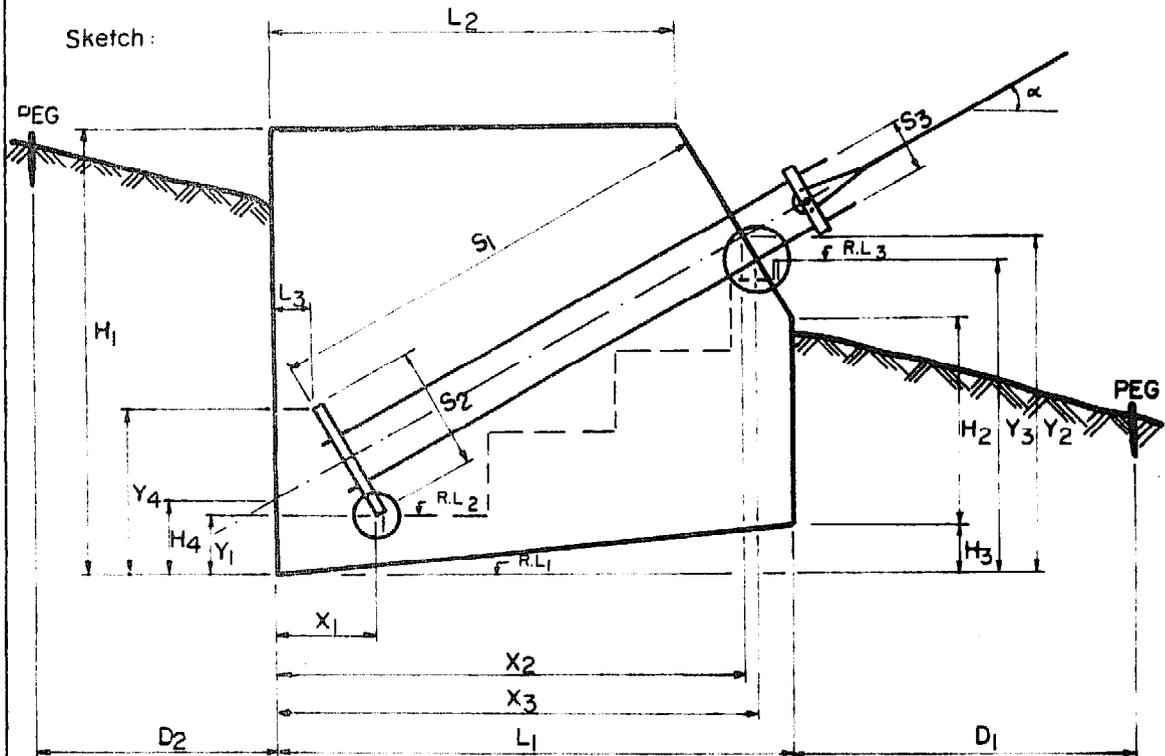

Please refer to standard Main Anchorage Block drawings span / 20

For the fitting, the two points "I" and "II" should be known

They are calculated as follows:

FOR POINT I :

$$Y_4 = H_4 + \frac{S_2}{2 \cos \alpha} + L_3 \tan \alpha$$

$$Y_1 = Y_4 - S_2 \cos \alpha$$

$$X_1 = L_3 + S_2 \sin \alpha \quad (R.L. 2 = R.L. 1 + Y_1)$$

FOR POINT II :

$$Y_2 = Y_4 - \frac{S_2}{2} \cos \alpha + S_1 \sin \alpha$$

$$X_2 = L_3 + \frac{S_2}{2} \sin \alpha + S_1 \cos \alpha$$

$$Y_3 = Y_2 - \frac{S_2}{2} \cos \alpha$$

$$X_3 = X_2 + \frac{S_2}{2} \sin \alpha \quad (R.L. 3 = R.L. 1 + Y_3)$$

These calculations can be checked graphically with an exact drawing.

SATA, Swiss Association for Technicl Assistance

CONSTRUCTION WORK


No.: 9.312

Fitting of a Main Anchorage (II)


Date: 20. 9.1975

Sig.: *G. S. L...*

1. Raise the plumb concrete 1:3:6 + 40% boulders up to the levels shown in the detail drawing (Standard Main Anchorage block span/20).
If - in special cases - reinforcement steel is required already fit the bars.

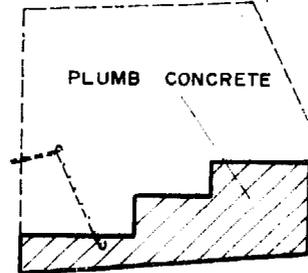


2. Fit the anchor-parts.
Support the parts from the back with stakes. Check the symmetry of the rods in reference to the bridge center line. The proposed supports in the front must be placed according to the standard drawing, in order to keep the correct gradient.
3. Continue the concreting and re-filling work (refer to standard drawing).

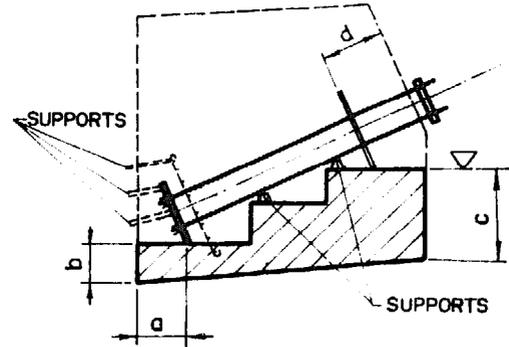

a, b, c, d refer to Standard drawings

The gradient of the anchor-rods and the reinforcement steel can be checked with the aid of a plank, having the required angle, and a carpenter's level.

Example : For an angle of $26,565^\circ$ ($\tan \alpha = 0.50$) - which is proposed at Standard Suspension Bridges - the wooden plank can have a base of 60 cm and a perpendicular of 30 cm.

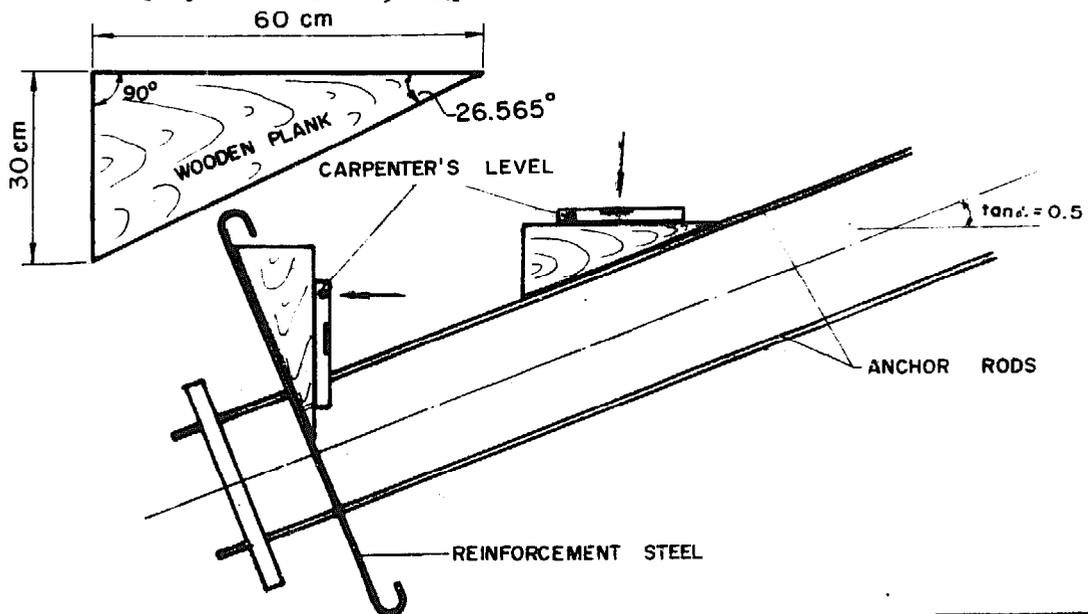

S A T A , Swiss Association for Technical Assistance

CONSTRUCTION WORK

Riverbank and Soil Protection

No. : 9.4.01

Date : 26th Feb, 77


Sig : *landrau*

After finishing the work the measures to protect the building have to be taken. We should try to make our best to protect the bridge for a long time. One of the most important and most efficient measures is the back filling. The backfill must be done in all types of subground buildings. The backfill protects the surface ground against erosion, sliding etc. A very important thing, also, is the drainage. If you make drainage in such a way that no water flow can occur at the bridge site, then you will most probably never have slides in this area. It is also important to see that the water can flow away from the backside of the walls and the blocks. Some kinds of Drainage and backfill are shown on the sketch page 3.401.


A very common way to protect the river bank is to provide gabian walls. The most important thing on constructing gabian walls is to fill them very well and only with stones which are bigger than the holes of the netting. The calculation of a gabian wall is also similar to the design of a gravity wall (dry stone masonry) and shown in chapter 3. "Structure Analysis" on page 3.507.

Some more types of retaining walls and their description are shown on the pages "Retaining walls and Foundation Structures for Suspended and Suspension Bridges" as part of chapter 3 "Structural Analysis".

Very often the decision about these things cannot be made out of the contour lines or out of the Survey Report. So the resident Engineer should take care of such things. The last rainy season might have changed the situation at Site, so that some retaining walls, gabian walls etc. might be necessary, or the foundation structures may be shifted. He should also consider exactly what might happen during next season. It might also be that some stonefall might occur during the rainy period. Also for that the resident engineer has to take care and make the required protections.

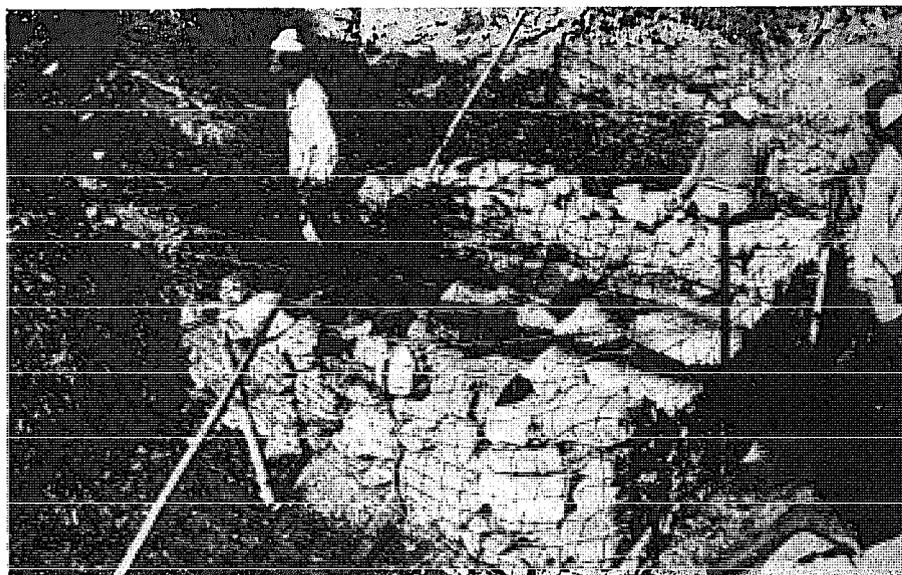

Gabion under construction

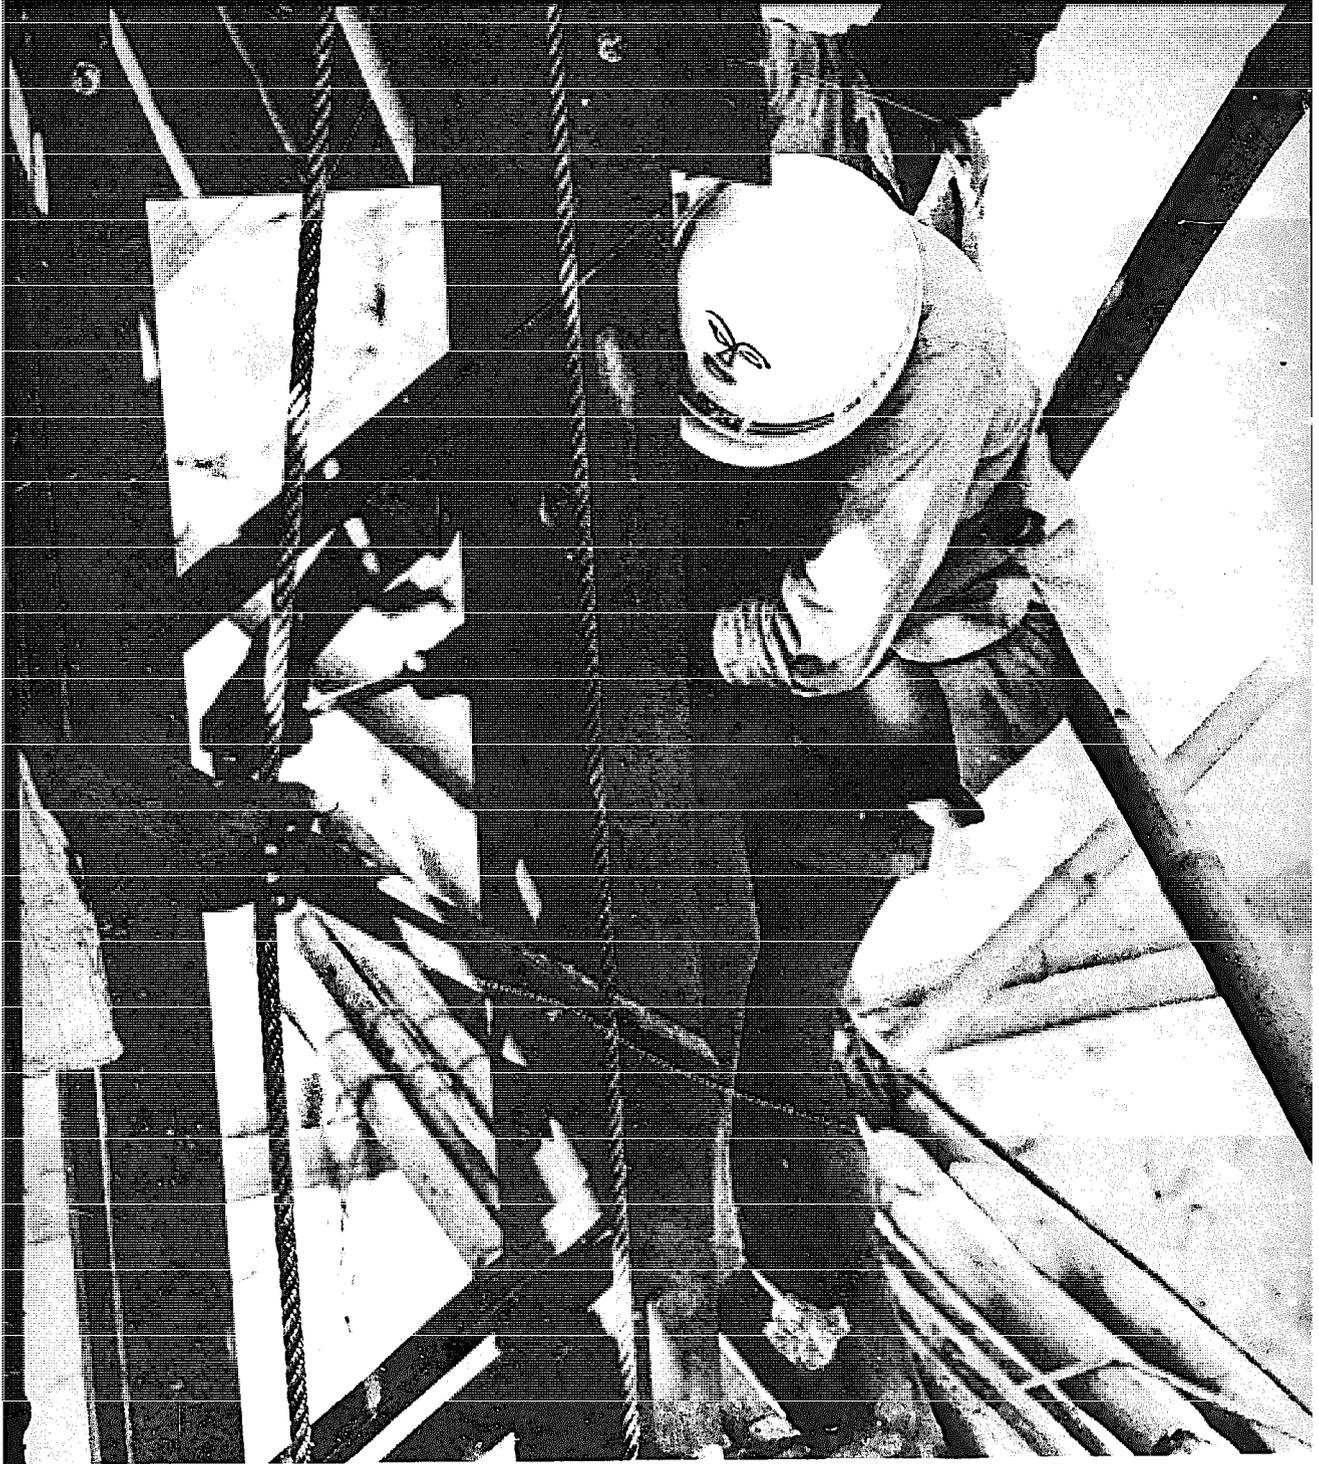

10. BRIDGE ERECTION

BRIDGE ERECTION

Suspension Bridge

Pylon

No. : 10.101

Date : 28.12.76

Sig : *Landman*

10. Bridge Erection


After all the concrete work has been done and all remaining excavations have been refilled, there remains the erection of the bridge. This is one of the most interesting pieces of work but also one of the most difficult and dangerous. In spite of the fact that all steel parts and cables are heavy parts they still have to be handled very carefully. The most delicate parts of the whole bridge are the cables. The cables are also very expensive and must be handled with great care. Even slight damage to the cables may make them useless. Also the important regulations such as retightening the bulldog-grip every day, retightening the nuts and putting on the lode nuts should not be forgotten. It is important to finish all jobs properly. Things like loose cable ends, badly fixed wire mesh, untied windties etc. make a bad impression and show up bad work.

This chapter shows how to erect the bridge. How to fit the steel-parts into the concrete is shown in the chapter "Construction Work".

10.1 Pylon Erection

For all suspension bridges we now have hinged pylons. The erection of such a pylon is quite difficult and has to be done carefully. During erection time the pylons have to be fixed with steel cables. For this purpose we will use cables $\phi \frac{1}{2}$ " at site (see cost estimate for suspension bridges). The support cables have to be fixed at the front and at the back of the pylon. The cable at the back can be fixed to the main anchorage and the one at the front to the two blocks provided for this purpose. These cables, the frontstay and the backstay should always be under tension. Only then is a good fixation at the pylon guaranteed.

SKETCH : 4

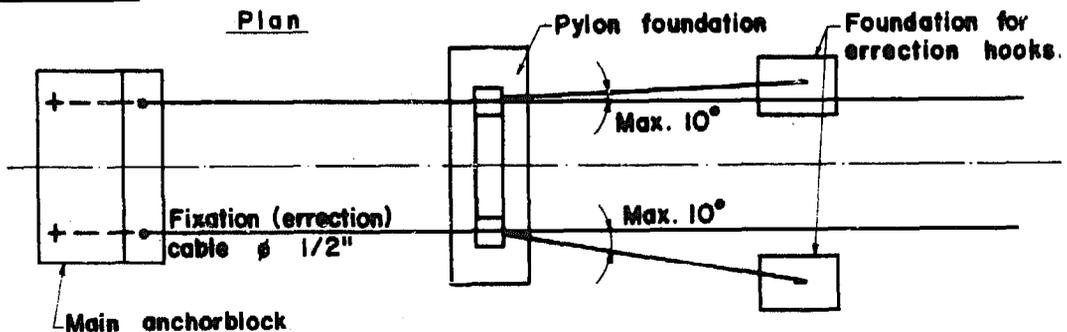

SATA - Swiss Association for Technical Assistance

BRIDGE ERECTION

Suspension Bridge

Pylon


No. : 10.102

Date : 28.12.76

Sig : *Budiau*


SKETCH: 2

Section

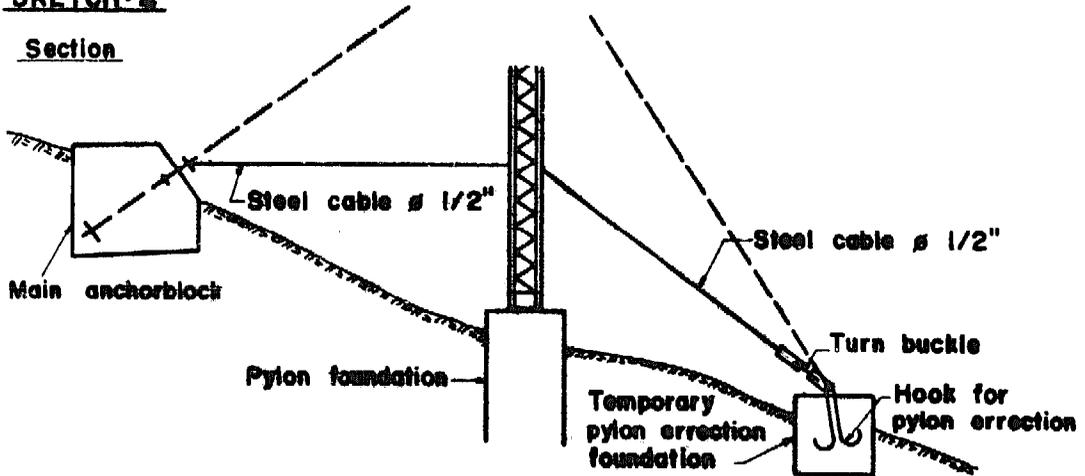

If the ground is steep, it may not be possible to fix the tower with a cable from the front. In this case the tower can be supported from the back with a wooden pole. At the front the tower may even be tied by a rope to the tower on the other bank.

SKETCH: 3

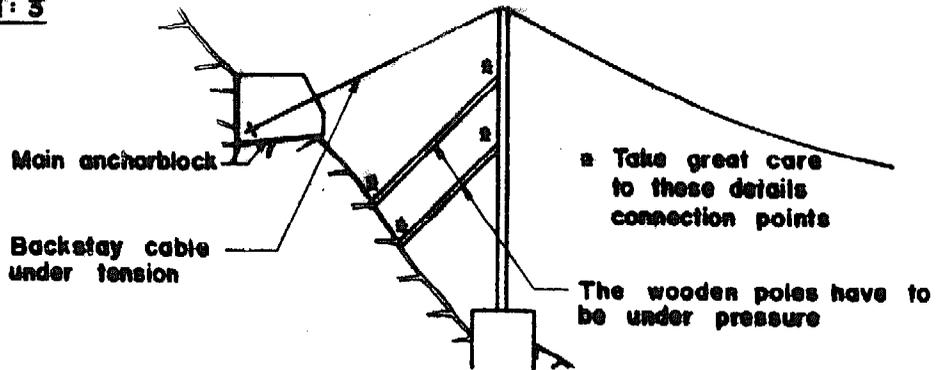

In the bearing some wedges or supports can be provided in addition to prevent movement of the tower at the beginning of the erection. However, these wedges or supports must be removed after fitting the third element of the pylon. The wedges should be of good wood or steel.

SATA, Swiss Association for Technical Assistance

BRIDGE ERECTION

Suspension Bridge


Pylon

No. : 10.103

Date : 28.12.76

Sig : Candran


SKETCH: 4

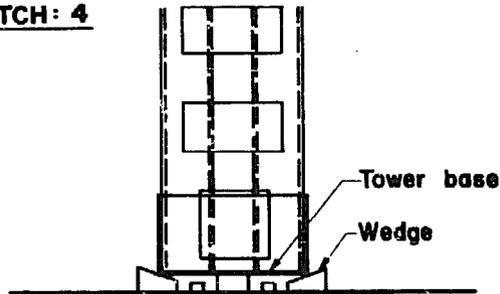

IMPORTANT :-

Don't forget to take out these wedges after fitting the third element at the pylon

For the erection of the tower use the Standard drawing "Pylon Assembling" (span/...). One example is shown on the following page.

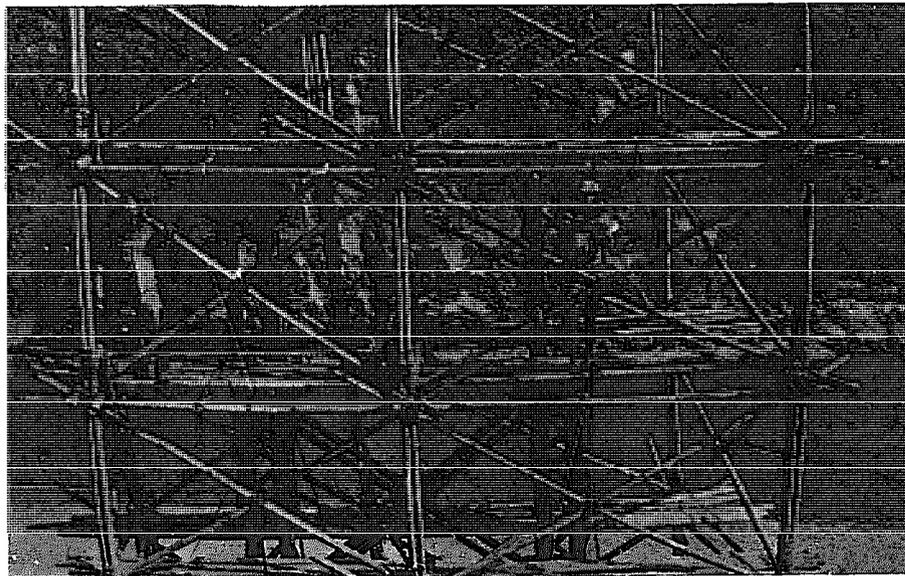

BRIDGE ERECTION


No. : 10.104

Pylon Assembling Standard Drawing 90/52

Date : 25.2.77

Sig : *Randau*

Details refer to Standard Drawing 90/51

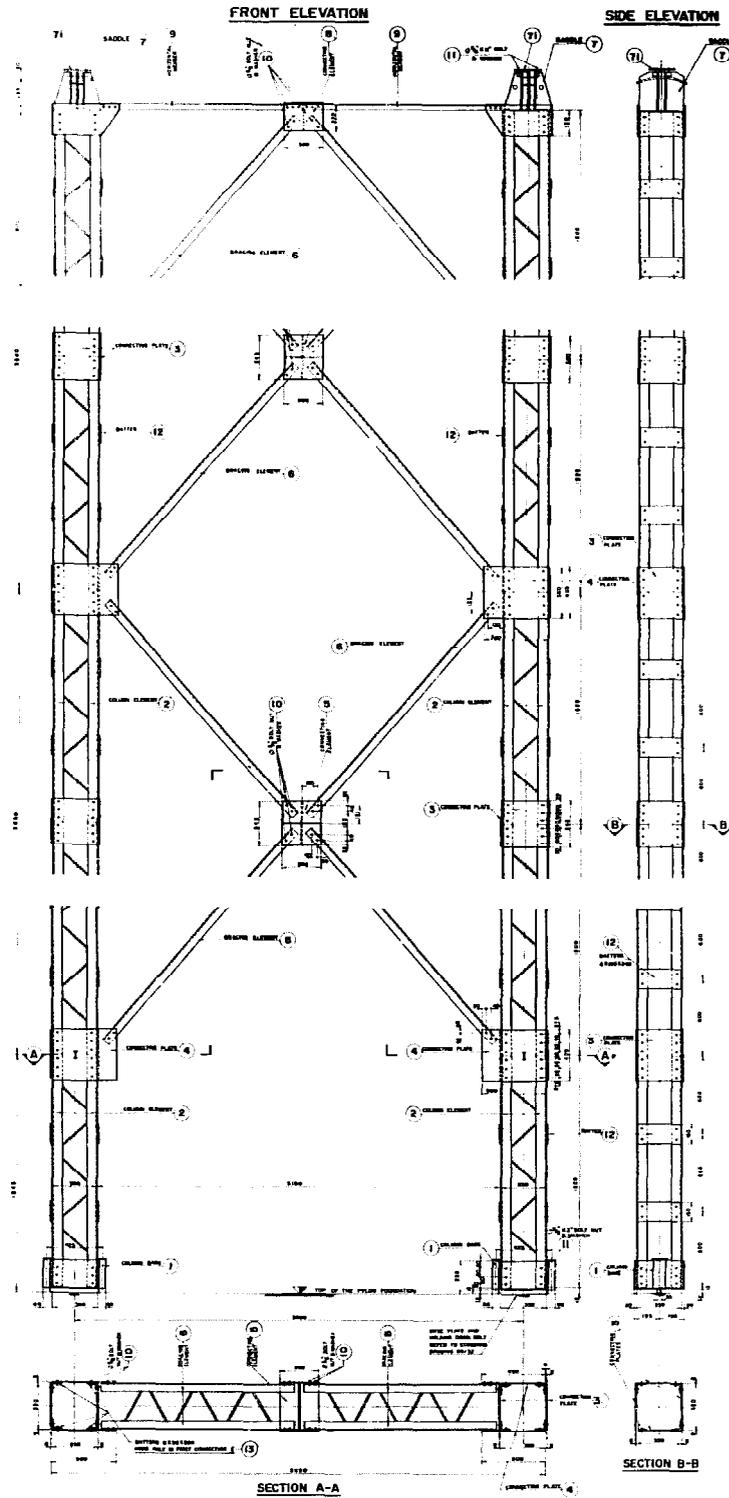

SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

BRIDGE ERECTION

Suspension Bridge

Pylon

No. : 10.105

Date : 28.12.76

Sig : Pandey

Scaffolding

The scaffolding is here to facilitate the work of the mechanics and not to fix the tower during erection. So the scaffolding and the tower should be fixed separately. There should be no connection between the pylons and the scaffolding.

Hoisting the parts

A kind of derrick, made of bamboo or other wood, may be used to hoist the parts for the erection. One possibility of how to make this derrick is shown in the sketch below.


SKETCH : 5

Derrick for the hoisting of parts

A kind of derrick, out of bamboo or other wood, may be used to hoist the parts for the erection.

In the sketch is :

- ① A piece of bamboo or of other wood, about 5 meters long.
- ② Pulley-wheel, fixed with a rope.
- ③ Hoisting rope.
- ④ Hook, (bent piece of a reinforcement-steel-bar.)
- ⑤ Tower-part being hoisted.
- ⑥ Strings to attach the derrick-pole to the already erected tower.

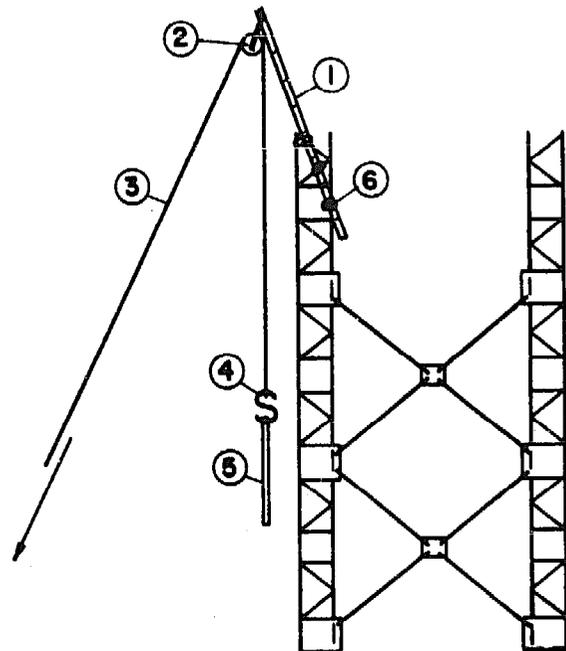

BRIDGE ERECTION

Suspension Bridge

Hoisting

No. : 10.201


Date : 28.12.76

Sig : *Landrau*

10.2 Hoisting main cable and spanning cable

Before the cables are taken across the river, mark some of the important points for hoisting on them.

SKETCH: 6

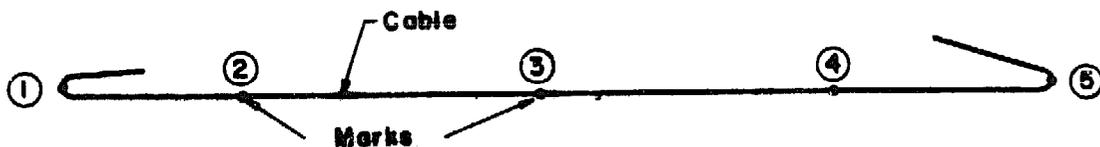


- Start on one side. Measure the length of the return-end (length required to fix the bulldog-grips). Mark point 1
- Measure the next section, the direct distance from point 1 to the tower top. Measure first with a tape as a rope at the site and then along the cable. Mark point 2
- Calculate the length of the cable between the two towers.

$$L = l + \frac{8 \times s^2}{3 \times l} \quad l = \text{span} \quad s = \text{hoisting sag}$$

Mark point 3 for the center of the bridge and point 4 for the top of the other tower.

- Measure the distance from the second tower to the fixation at the other main anchorage (also in middle position, if adjustable). Mark point 5
- Check that the remaining part has at least the length required for the clamping of the cable.

SKETCH: 7

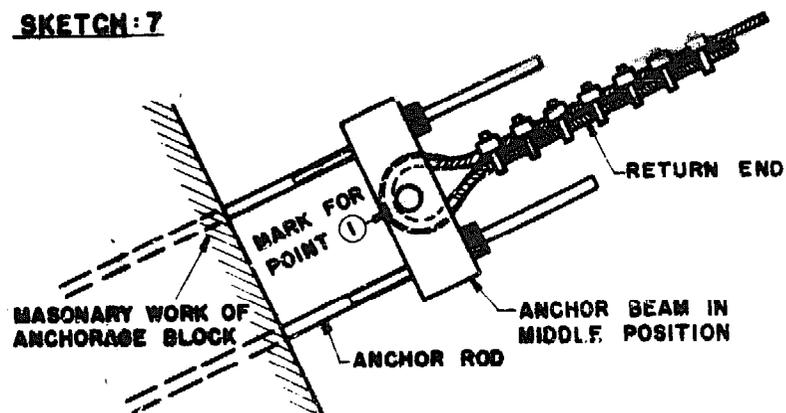


- For the spanning cable only the marks 1, 3 and 5 are required. All these marks have to be made before carrying the cables across the river. The marks can be made with paint. Mark 3 can also be a bulldog-grip. The cables can be taken across the river in two different ways.

10.2.1 Pulling along the smaller cables

This method is mainly used for spans smaller than 102 m. Up to this span we have spanning cables ϕ 1".

- Bring the spanning cables into position. They can be carried or pulled across the river by a few men.
- Pull the main cable along one of the spanning cables. On the sketch below a suggestion for the pulling-fixation is shown.

All these cables can be pulled by manpower.

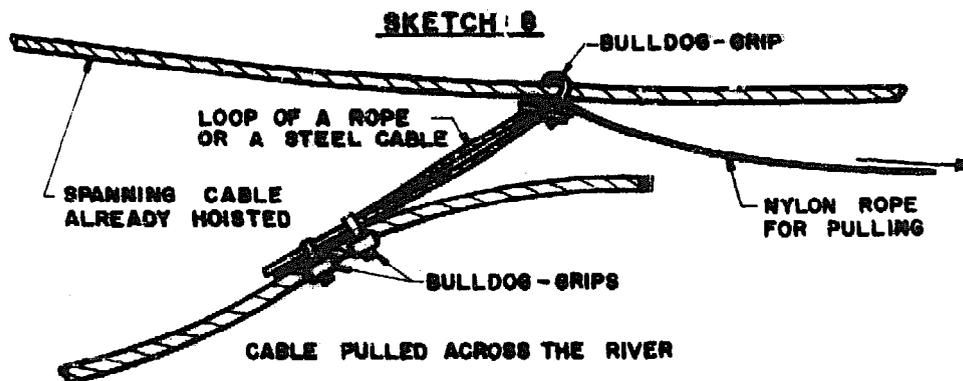

10.2.2 Carrying the cables across the river

This method is very easy as long as they can be carried across a temporary bridge. If there is no bridge, a rope bound to the cable has to be ferried across the river and then the cable is pulled through the river-bed.

This could cause difficulties because the cable, especially the fixation between rope and cable may get struck between stones. To avoid this a second rope may be tied to the cable-end. With the aid of this rope pulling from the ferry boat, the cable-end could be lifted a little bit above the ground and with the other rope the cable is pulled at the same time through the river-bed. This is the most common and also the easiest method.

BRIDGE ERECTION

Suspension Bridge

Hoisting

No. : 10.203

Date : 28.12.76

Sig : *Budhan*

10.2.3 Hoisting the cable into the tower

a) From the Side

This method may only be applied for spans up to about 102 meters.


Procedure

Phase 1 Take the cables across the river. Fix them to the main anchor-block on both sides. Use the marks on the cables! The upstream cables should be put upstream of the tower and the downstream cables downstream.

Phase 2 Lift the cables, one by one, first the inner then the outer, onto the saddle as shown in the sketch for phase 2.

Phase 3 As soon as the cable is a little bit higher than the saddle, loosen the tirlor machine slowly and, with an auxiliary rope, pull the cable into the saddle at the same time.

SKETCH : 9

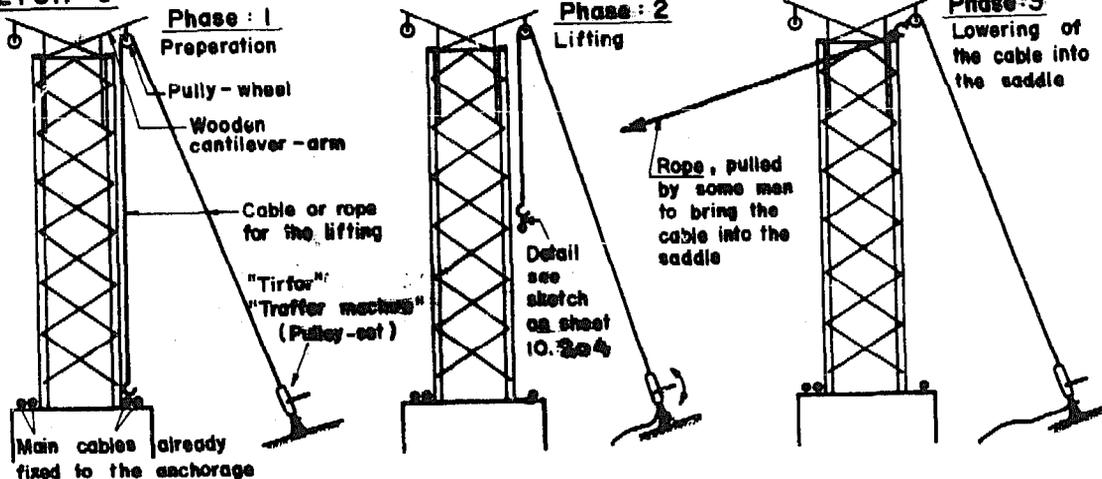

BRIDGE ERECTION

Suspension Bridge


Hoisting

No. : 10.204

Date : 28.12.76

Sig : Pandey

SKETCH: 10

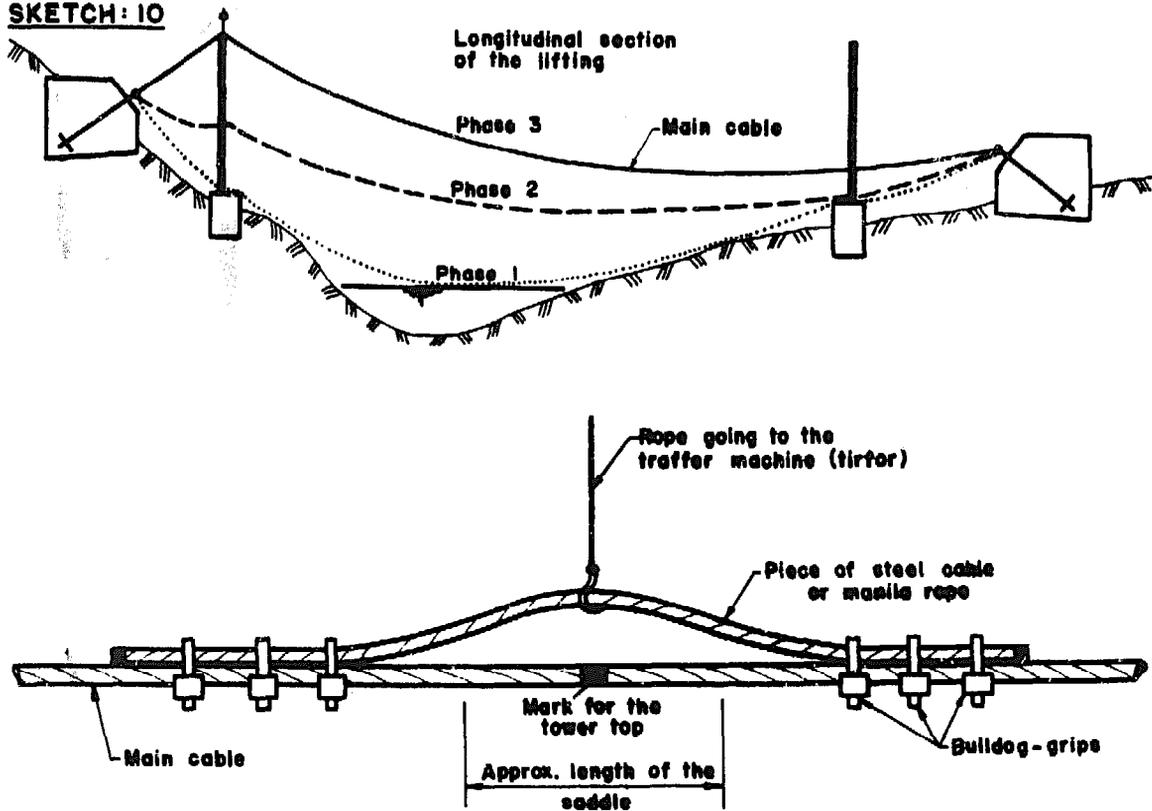

The main difficulties in this method are found in the construction of the wooden cantilever. How to calculate the forces on the tower-top is shown in the example below.

Example

Span 66 m

Cable \varnothing 1½", weight 5.5 kg/m

Overall length = 100 m

Calculation: At the end of the lifting, near the tower top, almost all the cable-weight should be lifted (F_1).

$$F_1 = 0.9 \times 100 \text{ m} \times 5.5 \text{ kg/m} = 495 \text{ kg}$$

$$F_1 = F_2$$

out of Force Diagram $F_3 = 970 \text{ kg}$

The forces to be taken by the wooden construction can be taken out of the Force Diagram.

$$F_V = 980 \text{ kg}$$

$$F_H = 230 \text{ kg}$$

BRIDGE ERECTION

Suspension Bridge

Hoisting


No. : 10.205

Date : 28.12.76


Sig : Pandey

SKETCH: 11

Sketch of the Tower-top




Force-diagram

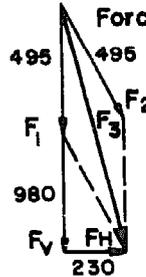


b) From the tower front

SKETCH: 12

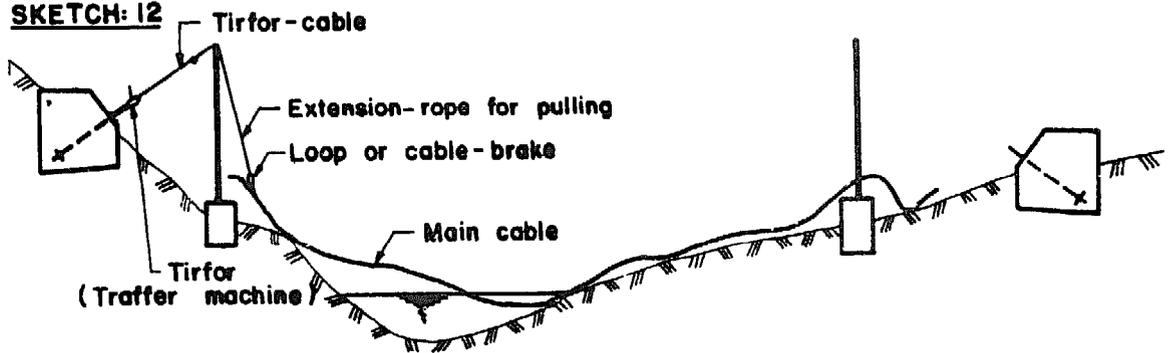

For this method you need two tirfor machines. Fix a loop at two places to the cable-end. How to prepare the cable for this hoisting method is shown in sketch 13.

SKETCH: 13

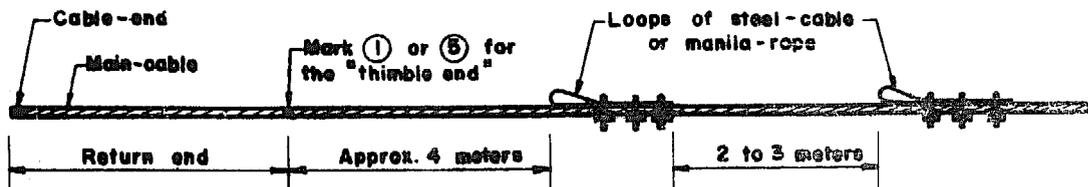

SAT A, Swiss Association for Technical Assistance

BRIDGE ERECTION

Suspension Bridge

Hoisting


No. : 10.206

Date : 28.12.76

Sig : Pandey

To each loop bind an extension rope which is tied to the cable of a tirlfor.
Use two tirlfors. Pull in, turn with one and then the other.

SKETCH: 14

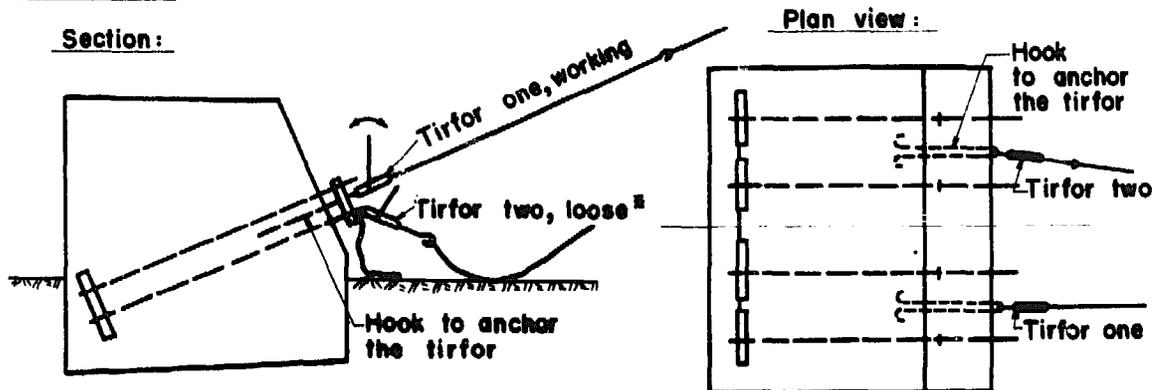

* Tirlfor two will start working as soon as the cable of tirlfor one is at the end.

This hoisting method causes difficulties on the tower-top. The sketches below show one means of passing the cable over the saddle.

- Phase 1 When the cable-end comes close to the tower top, pull on the second loop. Pull until the first loop has passed the saddle. The cable-end with this loop is only loosely guided or even not at all.
- Phase 2 Bind the second loop tightly to the tower. Then loosen the second tirlfor so that the extension-rope becomes loose and the cable only hangs on the fixation of the tower-top.
- Phase 3 Take the extension-rope of the second loop out of the saddle. Put the cable-end into the saddle and start to pull on loop one.
- Phase 4 Take away the second loop as soon as its fixation is loose. Go on pulling on loop one to which a second extension-rope is tied for tirlfor two.

BRIDGE ERECTION

Suspension Bridge


Hoisting

No. : 10.207

Date : 28.12.76

Sig : Pandey

SKETCH 15

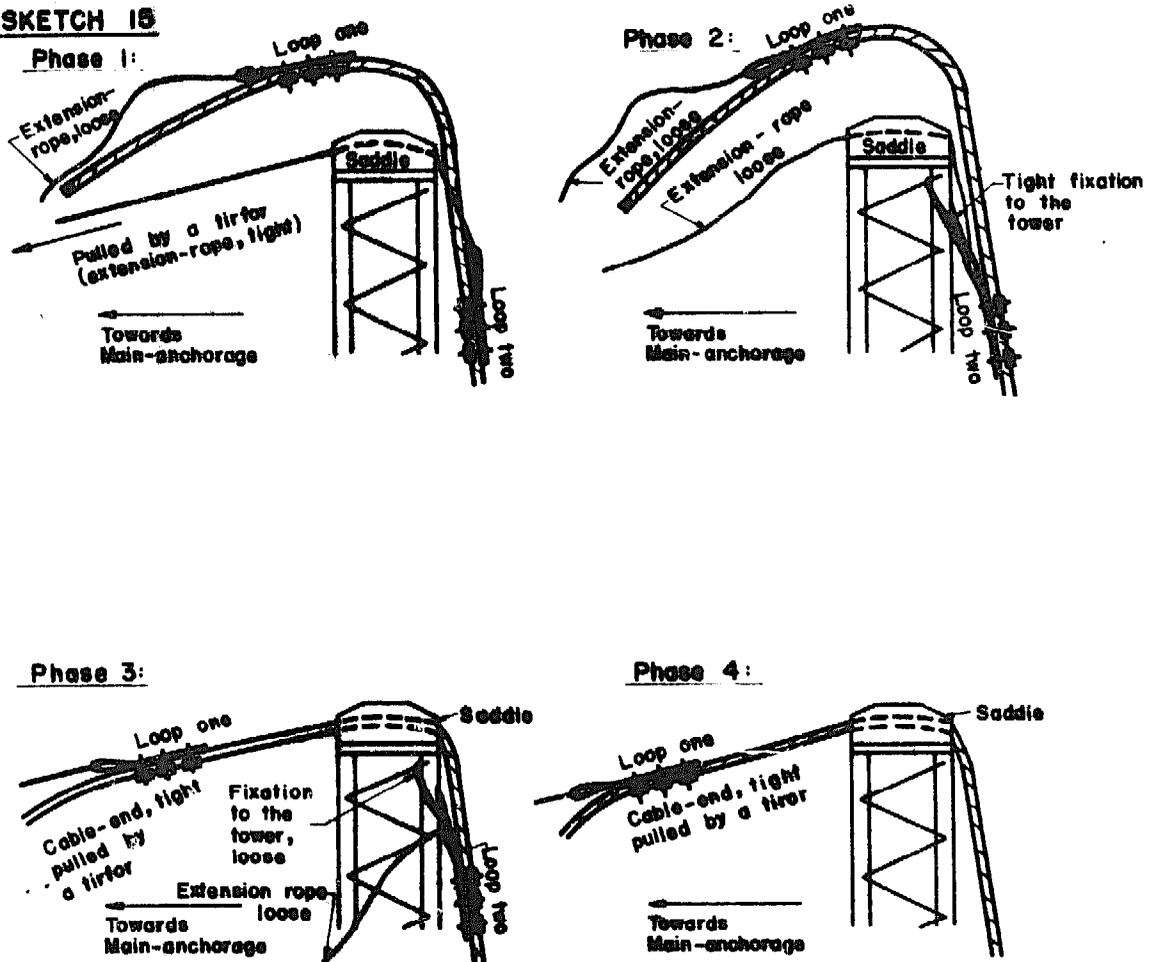

Lubrication: Keep the friction-force between saddle and ropes or cables small by using some lubricant. If available use oil. Glee or a similar product could also be used.

The maximum tensile force during hoisting in the main cable is shown in the list on page 2.303.

SAT A , Swiss Association for Technical Assistance

BRIDGE ERECTION

No. : 10.208

Suspension Bridge

Hoisting

Date : 28.12.76

Sig : Pandey

10.2.4 Fixing the hoisting-sag

The required hoisting-sag is given in the general arrangement and also in the list on page 2.303. With the levelling instrument you can fix the exact hoisting-sag in the following way:

- Mark the level on the tower.
- Adjust the levelling instrument in such a way that its line of sight is at the level calculated for the lowest point of the cable in the middle of the bridge. (R.L. of the tower-top minus sag).
- Pull the cable until it reaches a level of about 0.20 m higher than the erection sag.
- Clamp the cable around the thimble in the cross-beam of the anchor-rods.
- Loosen the tirfor.
- After all the main-cables have been hoisted in this manner, bring them to the required level by moving the adjustable beam.

10.2.5 Hoisting a spanning cable

The spanning cable can be hoisted in a similar way as the main cable.

- Fix the cable on one side to the anchorage (use the marks).
- Pull on the other side with a tirfor until a sag corresponding to the camber required afterwards is reached.
- Fix the cable on this sag.
- Check the sag with levelling instrument.

The force required for hoisting the spanning cable is much higher than that for the main cable although the cable-weight is smaller. This is due to the small sag. If it is not possible to hoist the walkway-cable to the required sag due to the high tensile force, the cable can be re-adjusted after the central suspenders have been connected.

BRIDGE ERECTION

Suspension Bridge

No. : 10.301

Date : 28.12.76

Sig : *Pandian*

10.3 Fitting the suspenders and the walkway


While the cables are being hoisted, get suspenders, beams and deck-planks as well as cable-car or fitter-platform prepared.

First fit the central suspender

- Send two cable-cars or fitter-platforms along the main-cables to the bridge-center.
- In the center bind the main-cables together at a distance of about the walkway-width, because they will hang at the distance of the saddles.
- With the aid of two tirsors or chain-pulleys lift the walkway-cables until they can be connected with cross-beam and suspenders to the main-cables. Use the mark on the cables to position the suspenders. Check that the suspenders are perpendicular to the bridge-centerline.
- Re-adjust the walkway-cables. Tighten them as much as possible to give some pre-tension.


SKETCH: 16

Sketch of the bridge-center

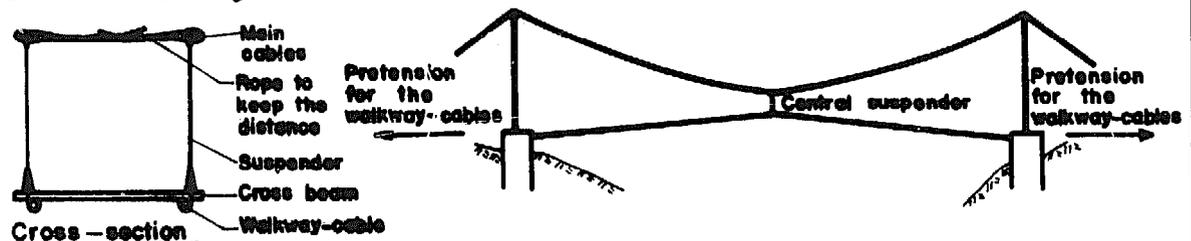

Now start fitting the other suspenders and the walkway. Start either from the towers or from the bridge-center. Measure the distance from suspender to suspender carefully, e.g. with a ganged stick. At every tenth suspender check the distance from the tower or the bridge-center to this suspender (by tape).

SKETCH : 17


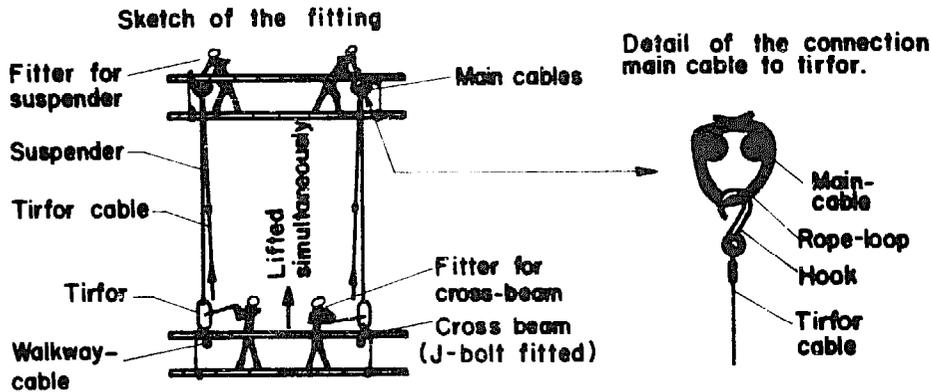


If there is only one main-cable, the hook can hang on the cable itself.


FRONT VIEW

SKETCH : 18

SIDE - VIEW

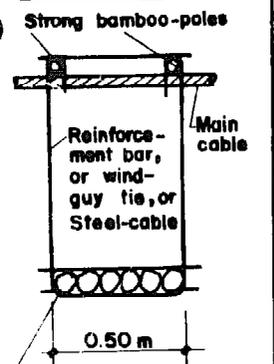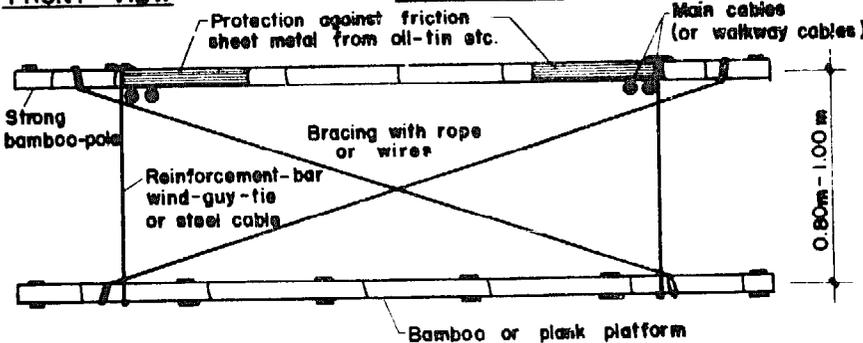


PLAN VIEW

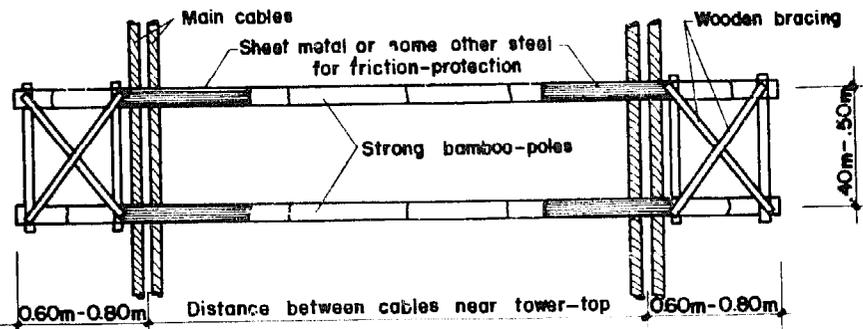

Bamboo poles or planks joined to form a platform

ASSEMBLY:

First put the top portion on the main-cables. Then hang the platform under this, connected with steel-bars or cables.

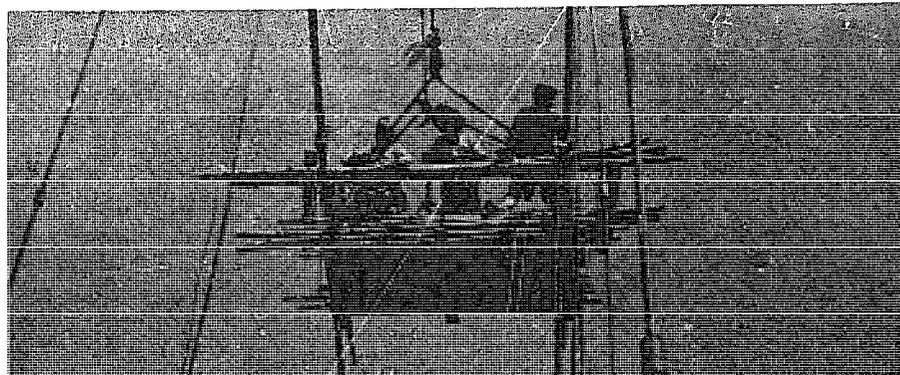

BRIDGE ERECTION

Suspension Bridge

No. : 10.303

Date : 28.12.76

Sig : *Randauer*


There are two main ways of fitting the suspenders: one is to start at the tower and go on up to the bridge center and the other is to start at the bridge center and go on up to the towers. The main advantages and disadvantages of these methods are mentioned below.

Fitting from the towers in towards the bridge center


Advantages: Supply of parts is easy. The fitters for the suspenders can work in an almost upright position (near the towers and easily check the distance from suspender to suspender.

Disadvantages: Due to an unavoidable inaccuracy in the determination of the span and the measurements from suspender to suspender the remaining spacing in the bridge center will be too long or too short. This will require an adjustment of the planks and means the walkway bracing will have to be left out or adjusted. Access to their working place is difficult for the fitters.

SKETCH 19

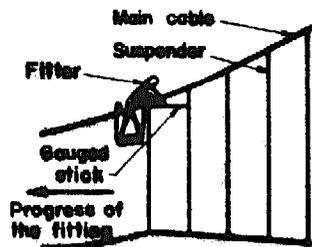

SKETCH 20

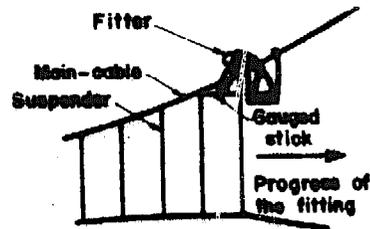

Fitting from the bridge-center out towards the towers

Advantages: No problem with the adjustment of the walkway-bracings and planks. The access to the working place is easy, the platforms can be pulled into their positions in the morning.

Disadvantages: The fitters will have to work in a bent position (near the tower). The supply of parts must be well organised. Pulleys and many ropes are required.

SAT A , Swiss Association for Technical Assistance

BRIDGE ERECTION

Suspension Bridge

No. : 10.401

Date : 28.12.76

Sig : *Baudrau*



10.4 Fitting of windguy cables and ties

Here also there are two possibilities to hoist the windguy cable and connect the ties to the bridge. One is to fit first the windguy cable and then the ties, and the other is to fit first the ties and then the windguy cable to the anchorage blocks.

Procedure for the first method

After the windguy cables have been marked and the ties fixed, take the cables across the river and fit them to the anchorages. They will hang directly from one anchor-block to the other. As soon as the suspender-walkway-fitting has been completed, connect the windtie-cables to the walkway-beams. Start with this work in the bridge-center. Use two tirkors, one for the upstream-cable, the other one for the downstream-cable. Pull the windguy-cables simultaneously towards the walkway and connect the ties (see on sketch 21). Check whether the bridge is still straight. In order to get hold of the windguy-cable throw the hooked end of the tirkor-cable down from the walkway on to the cable. If the tirkor cable is too short add an extension-rope.


BRIDGE ERECTION
 Suspension Bridge

No. : 10.402

Date : 28.12.76

Sig : Pandey

SKETCH: 21

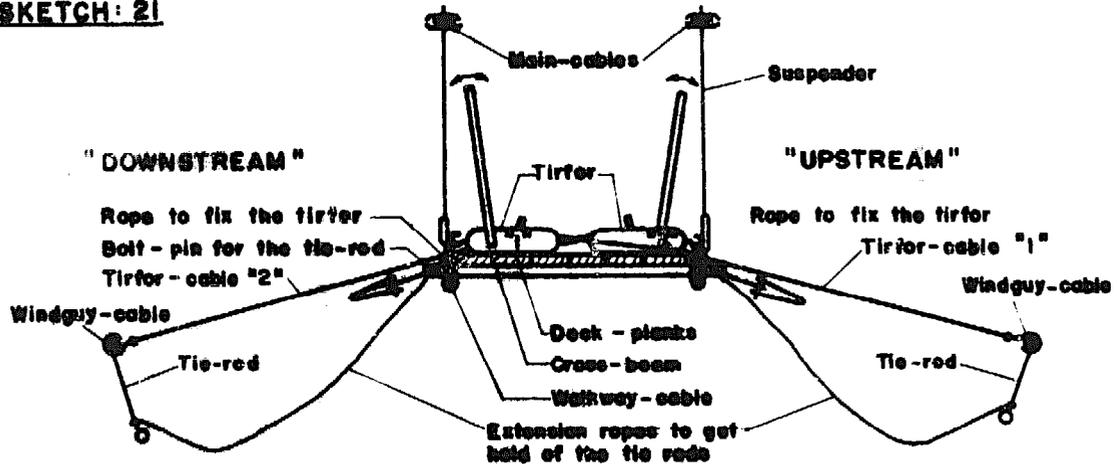

Continue to connect the ties with the walkway. Displace the tirfors for every tie. Always pull symmetrically and check the alignment of the bridge.


Procedure for the second method

Mark the windguy cables and fit the windties as in method one. Bring the windguy cable in position along the bridge (outside the suspenders) and fix the windties to the walkway beams. After that fix the two ends of the windguy cable to the anchorage. With the tirfor you have to give the required pre-tension in the windguy cables. Tie both windguy cables simultaneously to avoid an unsymmetrical load on the bridge.


After finishing all these jobs retie the windties with the clamps provided for this purpose.

S A T A - Swiss Association for Technical Assistance

SKETCH 22

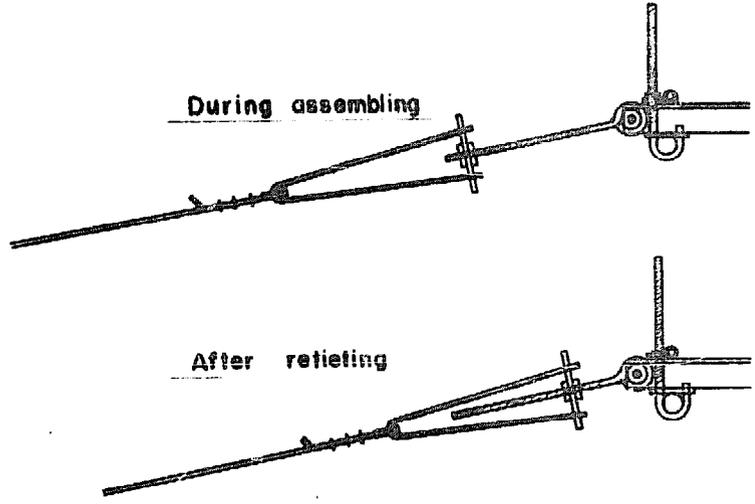

All measurements required for this work, such as the distance between the ties and the windguy cable and the length of the ties are given in the general arrangement.

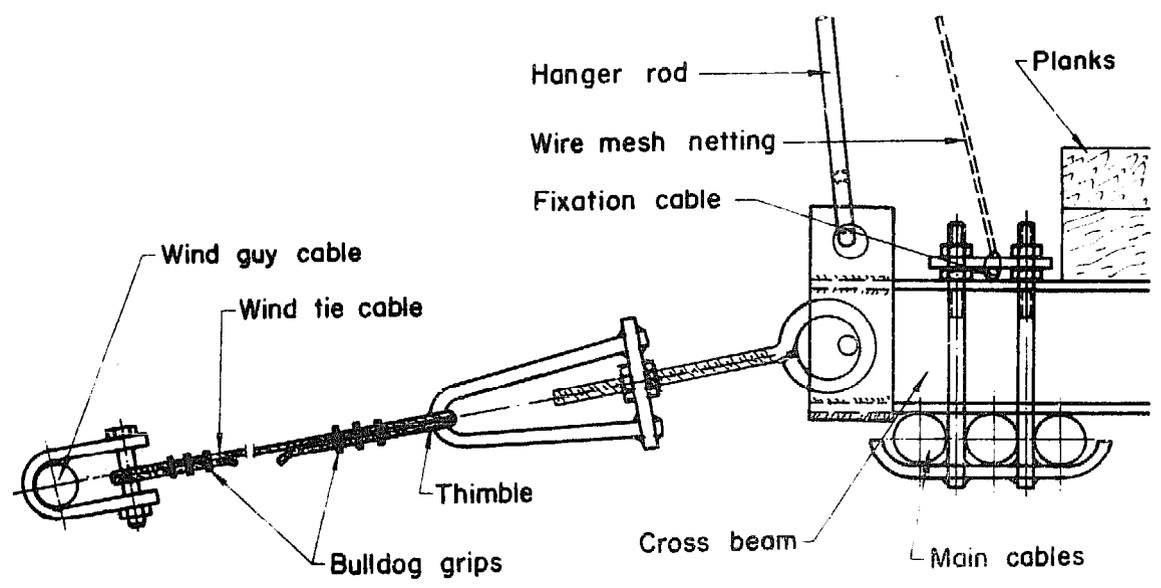

SAT A, Swiss Association for Technical Assistance

BRIDGE ERECTION

No. : 10.501

Finishing off


Date : 25.2.77

Sig : Pandey


10.5 Finishing off

There now remains the fitting of the Fixation Cable, Handrail cable, wiremesh and planking. The wiremesh has to be fixed properly at the fixation cable and at the handrail cable.

SKETCH

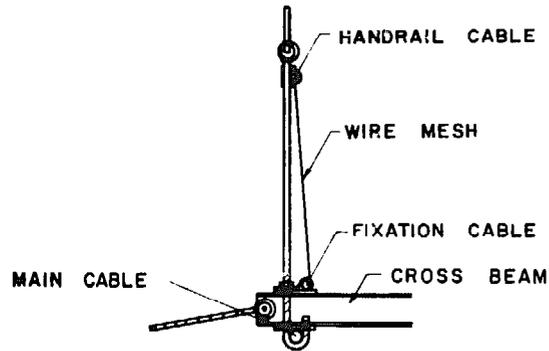

The planking should also be well and correctly fixed. All work required to finish off the bridge are mentioned at the end of this chapter.

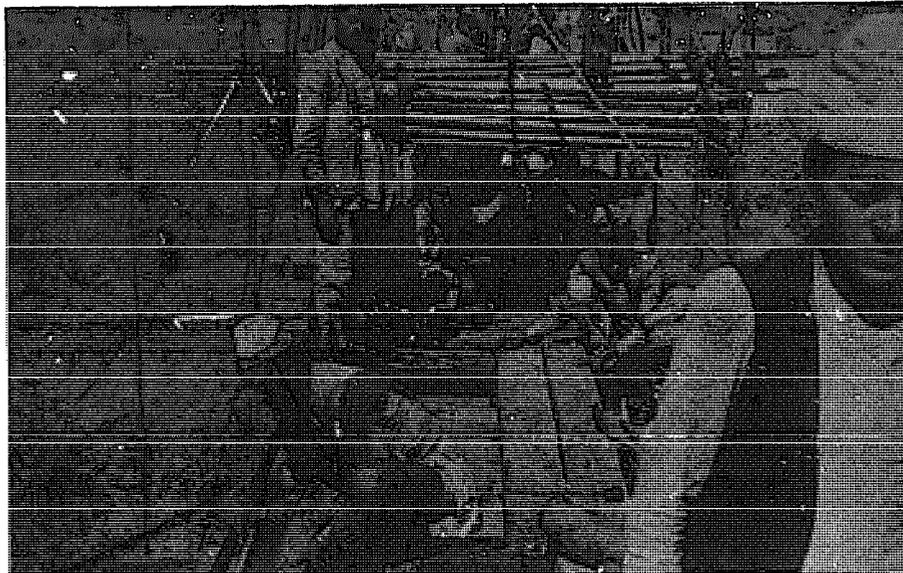

Fitting of planking

BRIDGE ERECTION

Suspended Bridge

No. : 10.601


Date : 28.12.76

Sig : *handrain*

10.6 Erection of a suspended bridge

10.6.1 Fitting of main cable and handrail cable

The method of how to pull the cable over the river is the same as shown under suspension bridges. The only difference is the fixation of the cables. Each main cable has to be turned round the drum three times, sometimes even more. If this is required it is mentioned in the general arrangement. The cable end has to be fixed with clamps at the back. All hooks and clamps and the drum are shown in the lay-out example below.

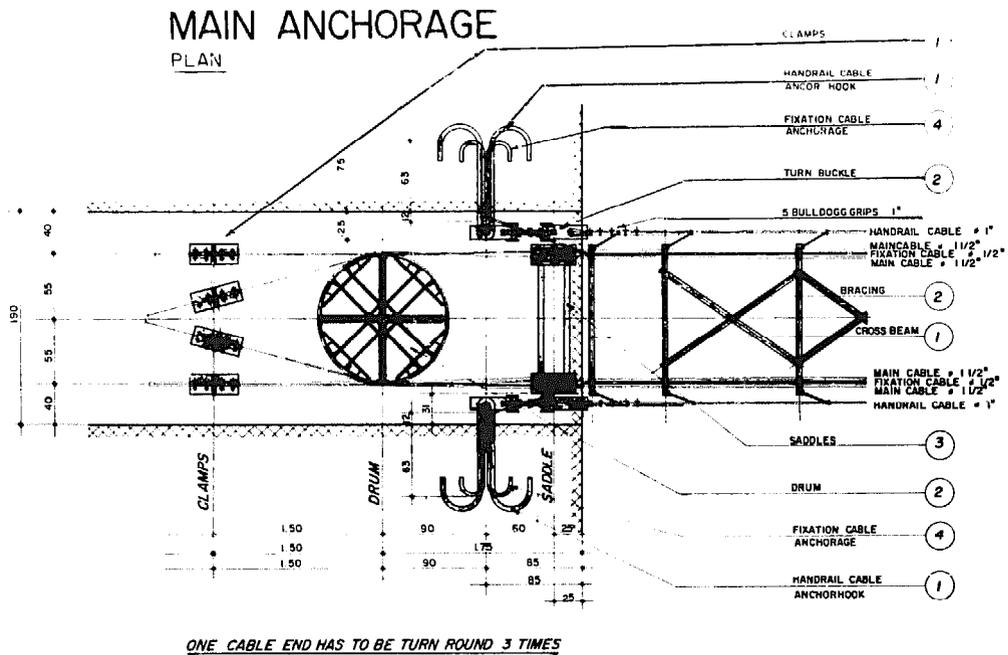

S A T A , Swiss Association for Technical Assistance

The following procedure should be used to get the cable into the right position:

1. Turn the cable three times round the drum on one river bank.
2. Fix the cable end with the clamps.
3. Do the same thing on the other bank. The sag should be about 20 cm less than the required hoisting sag.
4. Loosen the clamps and adjust the main cable to the correct sag.
The cable will move round the drum if you hammer smoothly with a wooden or rubber hammer on the cable around the drum.


After fixing the main cables fix the handrail cable in a parallel position to the main cable. The handrail cable is fixed to the turnbuckle hanging on the handrail anchorage hook (see lay-out drawing).

Walkway and hanger fitting

10.6.2

The walkway m.s. cross beam channel and the hangers will arrive at the bridge site as one unit -e.g. the hangers are members of the cross beam unit. To fit this item no trally or such is required.

WALK-WAY

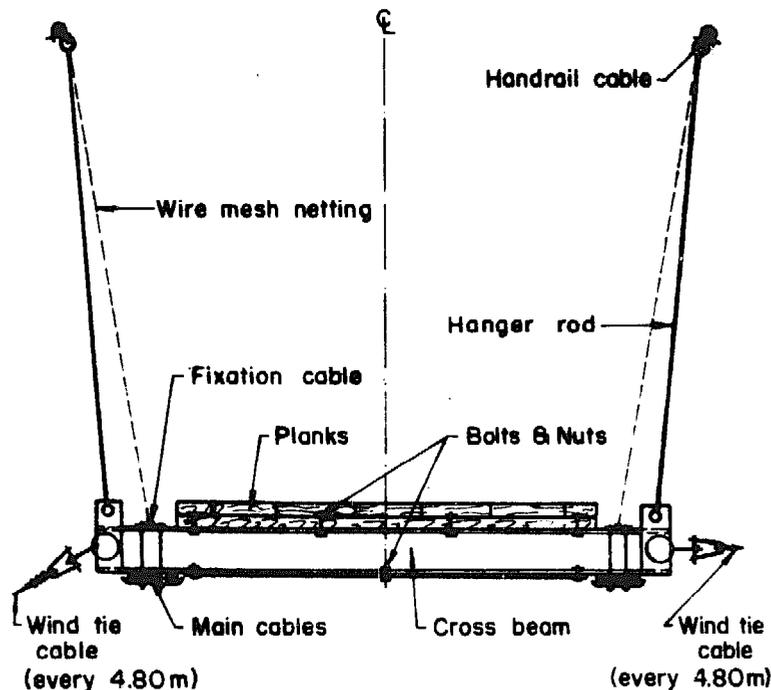

BRIDGE ERECTION
Suspended Bridge

No. : 10.603

Date : 28.12.76


Sig : Pandey

Fitting Procedure


1. Hang up the first walkway element in the handrail cable and tie it to the handrail cable and the main cable.

SKETCH 22

PLAN

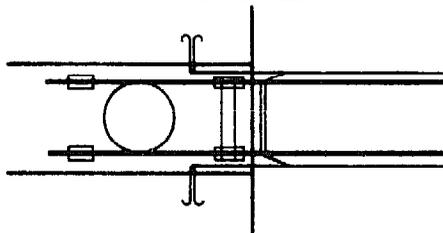


ELEVATION

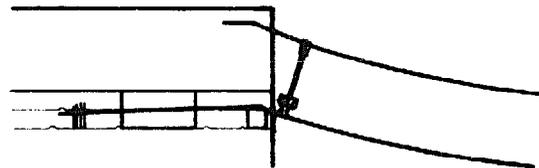


2. Fix the bracing flats on the next element. Fix also the bolt at the crossing point. Hang this element just in front of you on the handrail cable.

SKETCH 23

PLAN

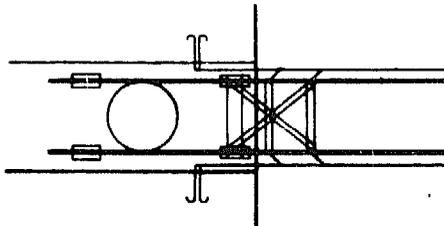


ELEVATION

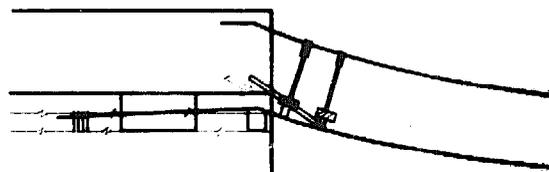


3. Push this whole element in front until you can fix the bracing onto the channel where you are standing.

SKETCH 24

PLAN

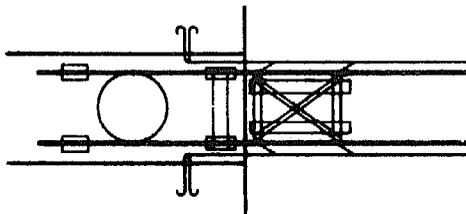

ELEVATION

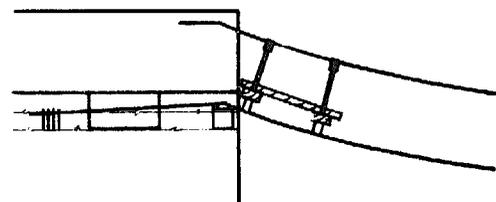

BRIDGE ERECTION

Suspended Bridge

No. : 10.604


Date : 28.12.76

Sig : *Panovar*


4. Now you can lay some planks over to this new cross beam and go on and fit all nuts required and fit the main cable to the channel.

SKETCH 25

PLAN

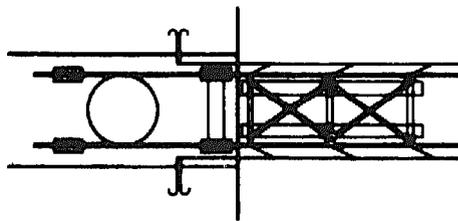


ELEVATION

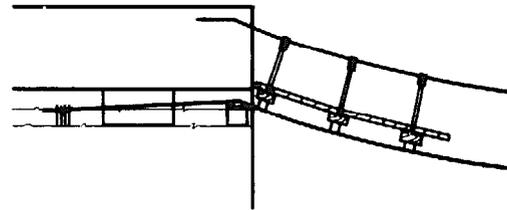

5. Now everything is ready to bring the next cross beam and fit it in the same way as shown.

After fitting the whole bridge retighten all nuts and fit all locknuts. Then you can fit the remaining planks, the fixation cable and the wiremesh.

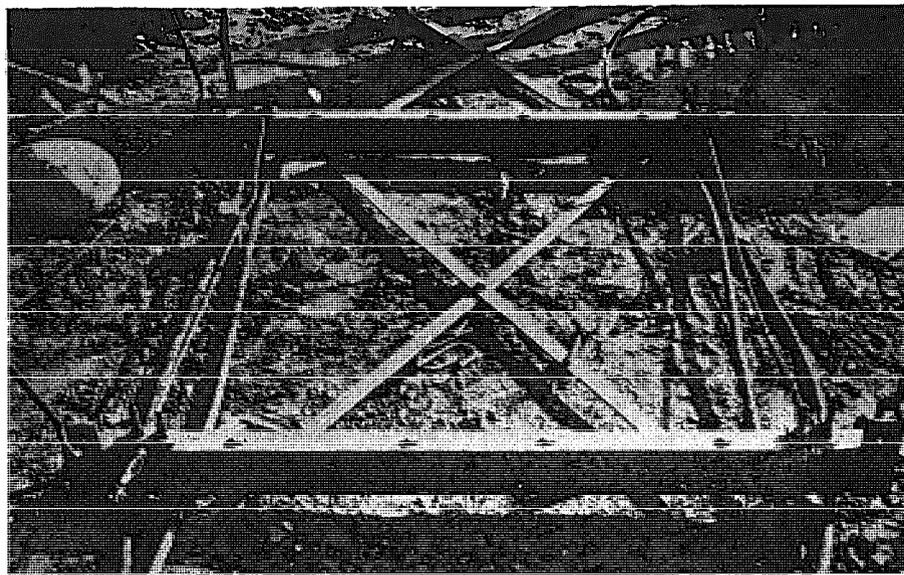

Fitted walkway of a Suspended Bridge

BRIDGE ERECTION

No. : 10.701

Single wire

Date : 28.12.76

Sig : Pandey

10.7 BRIDGE ERECTION USING PARALLEL WIRE CLUSTER (P.W.C.) CABLES

10.7.1 ERECTION PROCEDURE

After completion of the foundations, as far as necessary for the wire anchorages, the "spinning" or pulling of the wires or wire groups can be commenced. The pulling and adjustment is in principal exactly the same as for stranded wire rope cables, except that the forces employed are very much smaller.

For small bridges up to 80 m span, a pilot wire is pulled across from one anchorage and adjusted to the correct level. The remaining wires are then erected using the pilot wire as a guide. Following this, work can commence on the erection of the walkway which is fixed to the cross-beams. In order to allow for any irregularities in the parallel wire groups it is also possible to connect the cross-beams together with wire netting. The cross-beams are then pulled loose across the wires from both banks to the middle. In this way possible differences in the wire length are allowed for. All other erection stages are normal, such as erection of the wires for the handrails and wind bracing and fixing of the clamps and other fittings on the walkway.

For larger spans it is advisable to work from a cat-walk, which as an erection aid is simply designed and easy in construction. It consists of 2 main cables (12 wires for 300 m span), timber cross-beams at 1.5 m centres and wire mesh. The handrail supports are fixed with steel bar stirrups at every second or third cross-beam. Single bridge wires are used for both handrail and middle rail. If one river bank is difficult to reach, then the cat-walk can be erected as the first stage of construction.

The cat-walk can be anchored on either bank with the help of tree trunks sunk into the banks. Erection of the cat-walk cross-beams and the wire netting is carried out from each side. Since the wire netting is continuous and the cross-beams hang underneath the cables, the erection work can also be continuous. For this purpose a draw rope is used from each side in order to pull the cross-beams and the wire netting into the middle. When both ends reach the middle, they are joined and the cross-beams clamped to the cat-walk cables.

BRIDGE ERECTION

Single wire

No. : 10.702

Date : 28.12.76

Sig : *Paudyal*

The cat-walk cables can be used later as either handrails or wind-guys and incorporated into the final bridge. With the completion of the cat-walk and the foundation, the pulling and erection of the main cables is a comparatively simple business. After the erection of the pilot wires for each cable, the remaining wires are pulled over and adjusted in the middle to the same level as the pilot wire. After pulling across between 30 to 40 wires, temporary clamps are installed at every 30 to 40 m so that the loose wires are prevented from being displaced by either wind or sun effects. After this the permanent cross-beams can be installed working from the middle outwards. All remaining works follow in the same order as for normal wire rope cable bridges. It should be noted that the use of cat-walks is also well suited for the other wire rope cable bridges in order to achieve optimum erection. The cat-walk is especially useful for the adjustment and collection together of the cables as well as enabling much smaller pulling forces to be used during the pulling across of the ropes. The safety of the whole operation is also considerably increased.

For the laying out and bundelling of the wires the previously mentioned temporary clamps should be used for quick opening and shutting. After pulling across and adjustment of the first wires, these clamps can be tied to the wires with thin wire or adhesive tape. After further pulling, the wires are erected along the side of the parallel wire cable and adjusted for height. In the evening after the temperature has fallen the remaining loose wires are incorporated into the cable after the opening of the clamps.

The next morning any remaining wires are incorporated into the cable and the clamps shut again. This procedure holds good for all parallel wire cables as well as for windguys, which have to be pretensioned during erection. After the clamps have been attached to the windguy cable, the ties can be attached which, with the help of further clamps are used to provide the necessary pretension. The temporary erection of the windguy cable is carried out vertically from bank to bank.

BRIDGE ERECTION

Single wire

No. : 10.703

Date : 28.12.76


Sig : *Landman*

10.7.2 P.W.C. CABLE ANCHORAGES

In order to anchor the main P.W.C. cables the wires are looped around the anchorage drum at one bank. On the other side an adjustable anchorage device has to pick up the two wire ends coming from the other end of the bridge. There are two ways of anchoring these. The ends can either be wound around concrete drums and fixed with wire clamps or fixed using cones and wedges. A steel plate is provided with conical holes in which the cones and wedges of each wire end are incorporated.

After completion of the erection work the anchorage system has to be embedded in concrete. The protection against corrosion is provided by the application of several layers of bituminous paint.

ANCHORAGE BLOCK LEFT BANK
WIRE SYSTEM

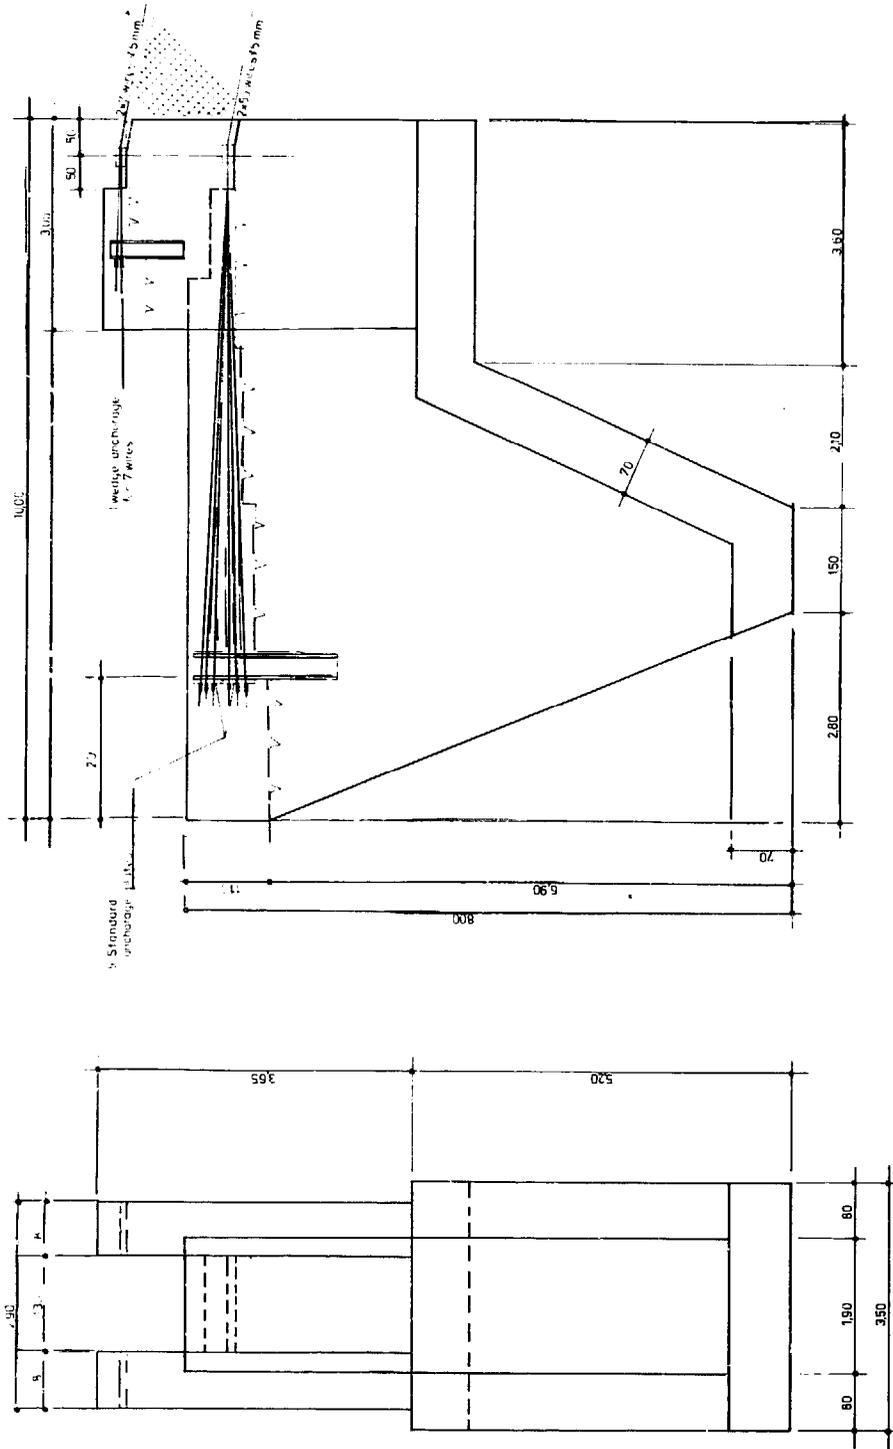

SECTION A-A

BRIDGE ERECTION		
Single wire, Anchorage Block type		
No. : 10.704	Date : 28.12.76	Sig : <i>Pandora</i>

BRIDGE ERECTION


Single wire

No : 10.705


Date : 23.12.76

Sig : *andian*

DETAIL OF SINGLE WIRE ANCHORAGE

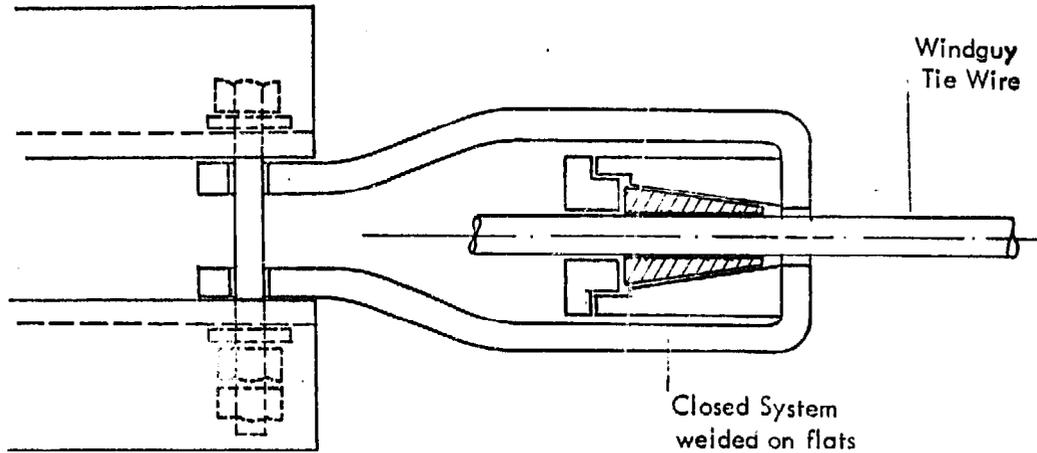

Cross-beam
Bridge Type 1

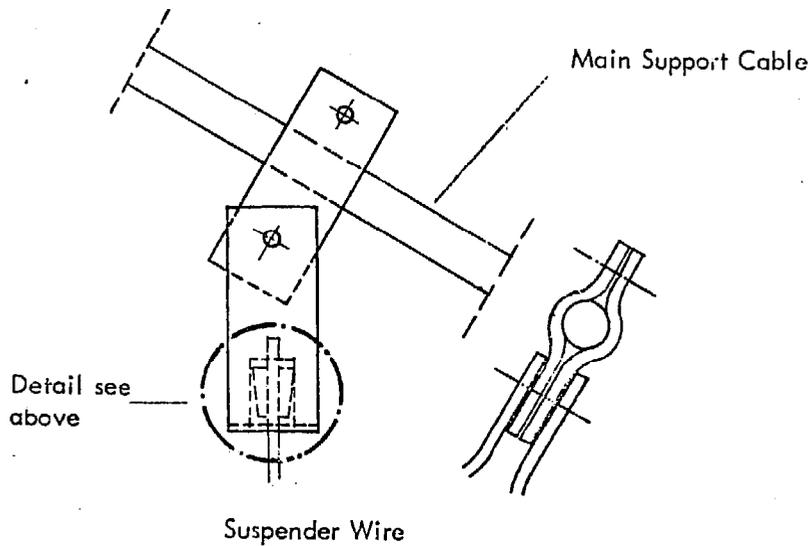

S A T A , Swiss Association for Technical Assistance

BRIDGE ERECTION

No. : 10.801

Final Check-Up

Date : 19.10.1975

Sig. : *D. E. Jones*

10.8 Final Check-Up

The points mentioned in this chapter are important for the lifetime of the bridge (pre-stress, check of all nuts) and the comfort of the bridge-crossing (pre-stress, smooth curvature). Even after the successful completion of a bridge-construction these points should never be neglected.

1. Smooth curvature of the suspension bridge.

For the fitting of the walkway all suspender-adjustments (turnbuckles) have been put in the same position. After completion the walkway may still zigzag up-down and left-right. Now adjust suspenders and windguy-ties in order to give the bridge a smooth and straight line.

These adjustments are in particular:

- Cross-beams should be horizontal. Check with a carpenter's level or by standing over each beam, legs straddled, and "feeling" the unevenness.
- Due to the windguy-ties the bridge may also zigzag upstream-downstream. Adjust the ties or even the whole windguy-cable until the bridge is straight. Check by eye, looking from the tower along the walkway.
- The camber of the bridge should show a smooth line. Adjust the suspenders which are higher or lower than this line. Check by eye, keeping the eye near the walkway-cable.

2. Pre-stress in the cable.

Spanning-, windguy- and sidestay-cables should be pre-stressed. This pre-stress can be applied by the tirfor. Fix a loop on to the cable and anchor the tirfor near the cable-end. (Similar to the hoisting). Pull as much as possible, use even a pulley-block to increase the force.

Tighten the movable adjustment. Do not open the bulldog-grips unless the adjustment-beam is at the end of the thread.

Pre-stress during the hottest time of the day when the elongation of the cables reaches its maximum. Pre-stress two or three times, on consecutive days.

The pre-stress in the spanning-cables of a suspension bridge can be increased by loading the whole bridge with sandbags or stones (up to $\frac{1}{2}$ of the life-load).

After the cable-fixations have been tightened, unload the bridge again.

This work could affect point 1 and thus require some re-adjustment of the walkway.

BRIDGE ERECTION

Final Check-Up

No. : 10.802

Date : 19.10.1975

Sig : *D. S. Gunes*

3. Check of all nuts.

All the nuts and bolts of pylons and walkway should be controlled and retightened. Do this work systematically so that no bolt remains unchecked. Damage the threads of bolts under regular dynamic stress (e.g. bolts for the connection of windguy-ties to the cross-beams) in order to avoid a self-opening of the nuts. This is not necessary if a lude nut is provided for this purpose.

4. Tightening of bulldog-grips, Arrangements for cable-ends.

All bulldog-grips have to be checked and tightened again. Already during the erection-time they must be checked every morning and evening. All cable-ends should be seized and bound with wire to avoid an opening of the cable.

The remaining cable (extra-length) should be fitted with wire or better some spare-bulldog-grips to the loaded part of the cables.

On the right two possibilities are suggested for this arrangement.


Unless there is a particular reason, do not cut the remaining pieces of the cables. If ever one day the bridge is dismantled and set up at another site, this extra-length of cable may be useful.

5. Fitting of the wiremesh-net.

Pay attention that also the fitting of handrail-cable, fixation cable and wiremesh-net is done in a neat and clean way.

SKETCH 1 ELEVATION


ARRANGEMENT: STRAIGHT ALONG THE LOADED PART OF THE CABLE

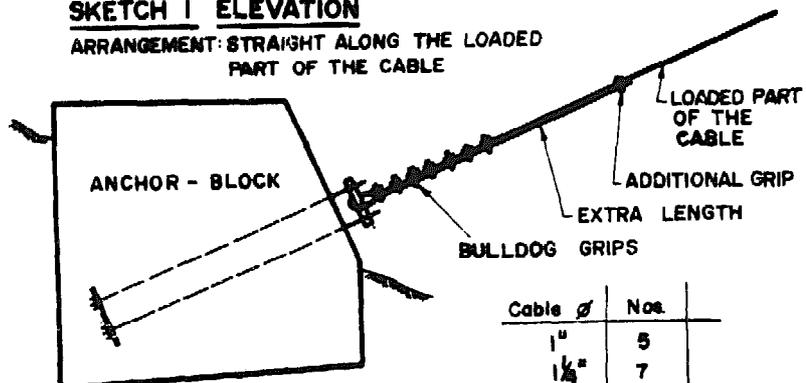


Cable ϕ	No.
1"	5
1 1/4"	7
1 1/2"	7

SKETCH 2 PLAN VIEW

ARRANGEMENT: IN CIRCLES BETWEEN THE LOADED PARTS OF THE CABLES

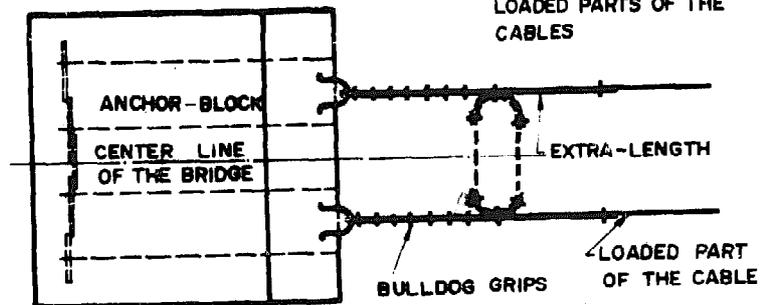

S A T A . Swiss Association for Technical Assistance

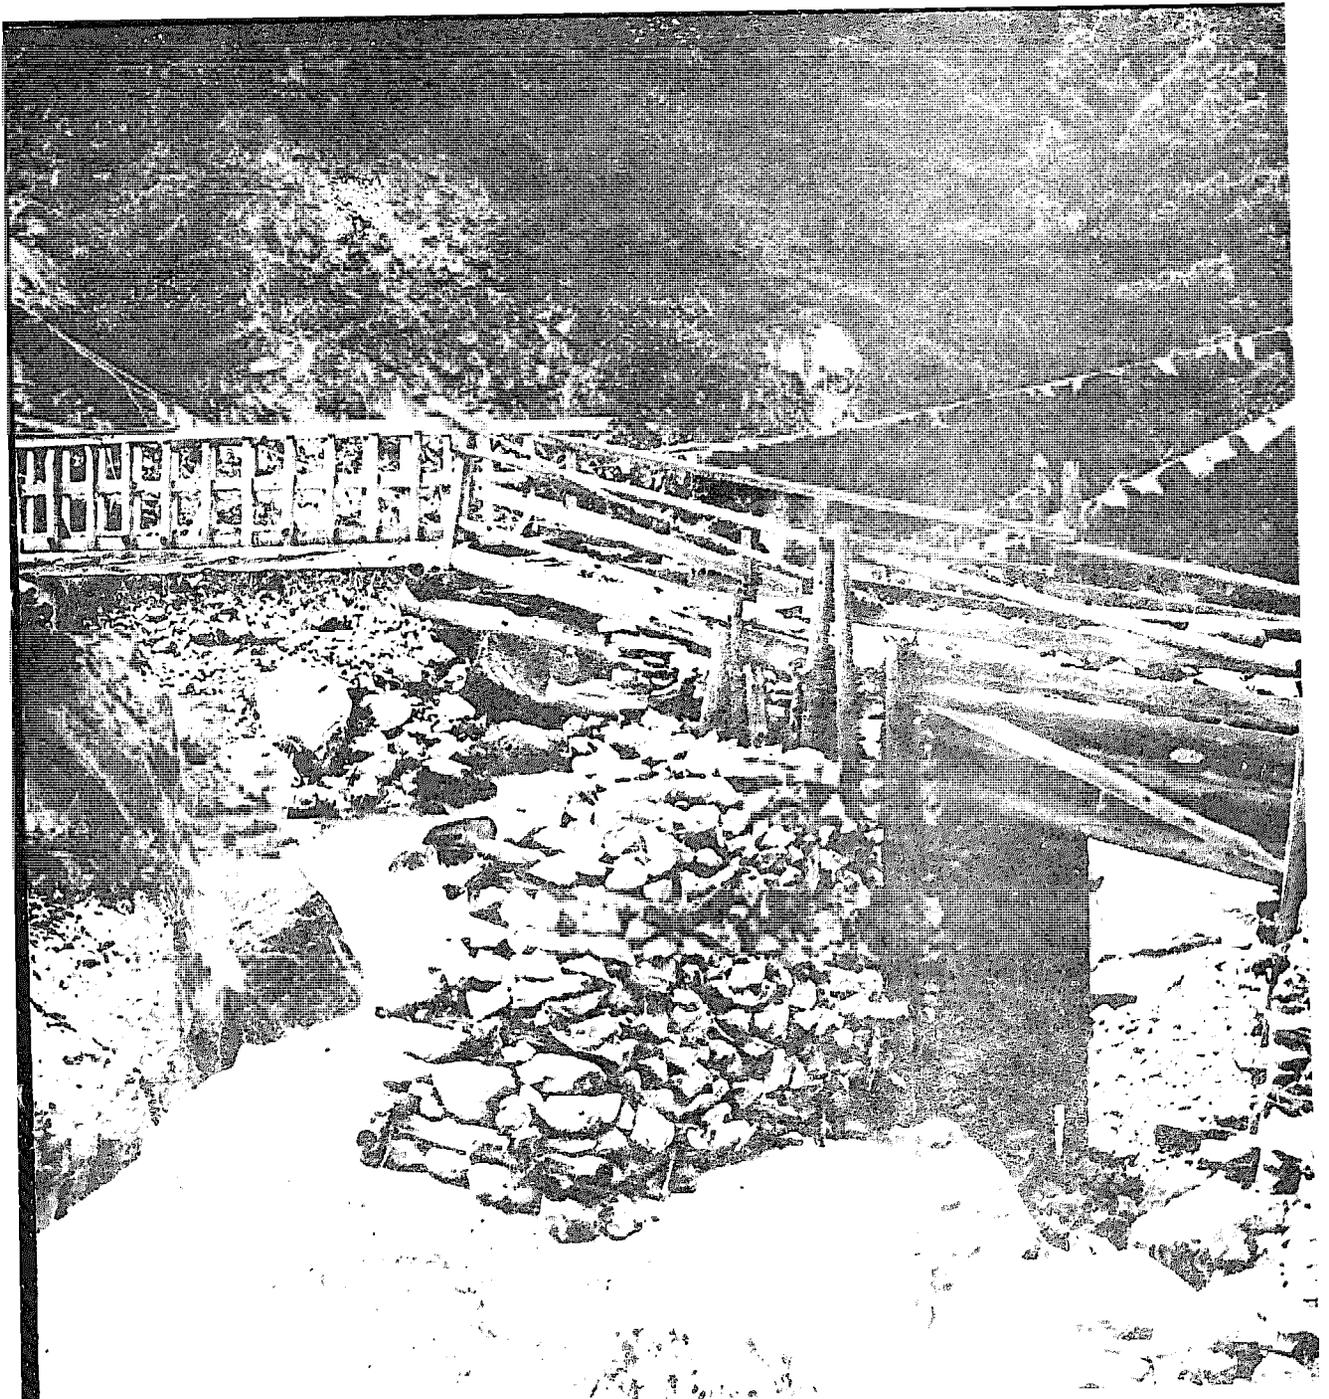

II. TRAIL IMPROVEMENT

TRAIL IMPROVEMENT
Maintenance Report

No. : 11.101

Date : 27.2.77

Sig : *Handrun*

11. Trail Improvement

Very often on the way to a bridge- or survey-site you have to pass old bridges. Sometimes they are in very bad condition or even not crossable. With a small maintenance work these bridges could be brought in a proper condition. If you see such bridges on the way, make a small maintenance report as shown below in the example of Tamor Khola. The work required should be in a good proportion with the bridge type. Of course it is not possible to bring the bridge in a condition like a new one, but to maintain it that it will be useful for some more years.

Bridge over Tamor Khola by Handrun

Span: 64 m

Koordinates: $87^{\circ}37' / 27^{\circ}23'$ Map 75/N/15

Actual condition of the bridge

The main cables of this bridge are hanging in unequal position. Also about 50% of the suspenders are not in good condition. The planking also needs a revision.


Works required to do

- Revision of the planking
- Replacement of some suspenders
- Correction of the cable position

View from left bank



Wooden tower of the bridge

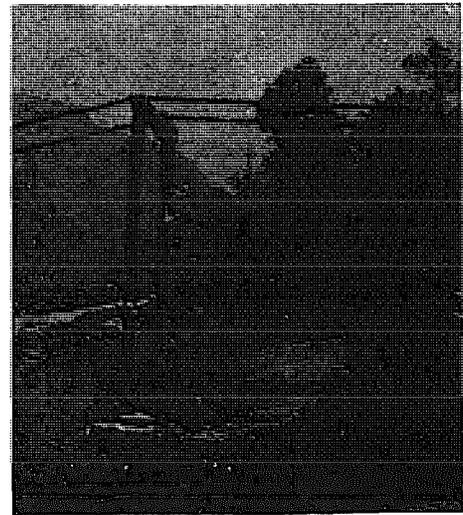

TRAIL IMPROVEMENT
Maintenance Reports

No. : 11.102

Date : 27.2.77

Sig : *Landair*

Bridge over Tamor Khola near by Thumba

Span: 41 m

Koordinates: $87^{\circ}40.5'$ / $27^{\circ}23'$ Map 72/M/15

Actual condition of the bridge

This old chain bridge is not in bad condition. Only the planking is too old and should be changed. The suspenders in the middle are very short, so that it is difficult to cross the bridge with heavy loads. Like all chain bridges it swings very much during walking.

Works required to do


- new planking



Bridge over Tamor Khola



View from left side

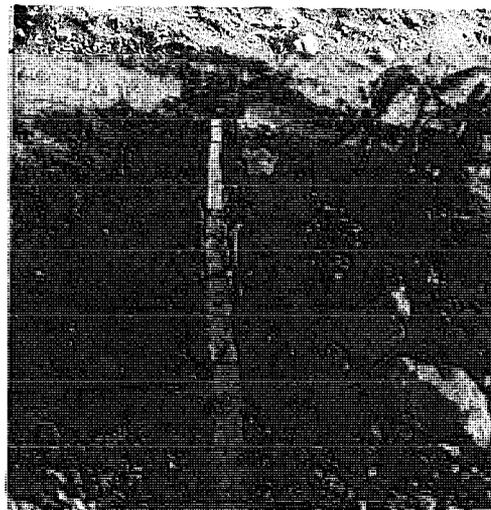

View from right side

HMG Nepal

Roads Department

Suspension Bridge Division

TRAIL IMPROVEMENT

Maintenance Reports

No : 11.103

Date : 27.2.77

Sig : *Landan*


Bridge over Sings Khola near confluence with Tamor Khola

Span: 34 m

Koordinates: $87^{\circ}42.5'$ / $27^{\circ}26'$ Map 72/E/15


Actual condition of the bridge

The condition of this bridge is not bad. At the moment no special maintenance work is required.

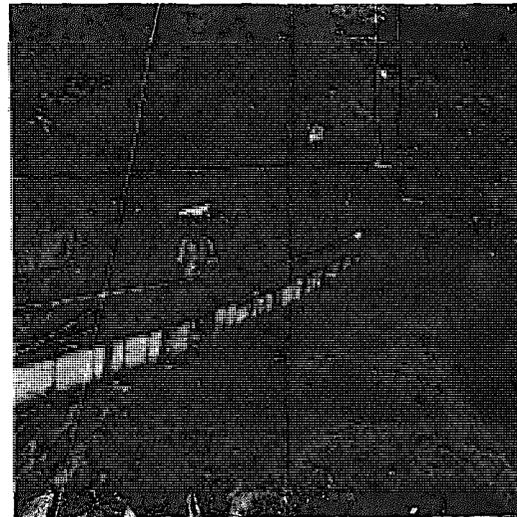

Side view of the bridge

Wooden tower of the bridge

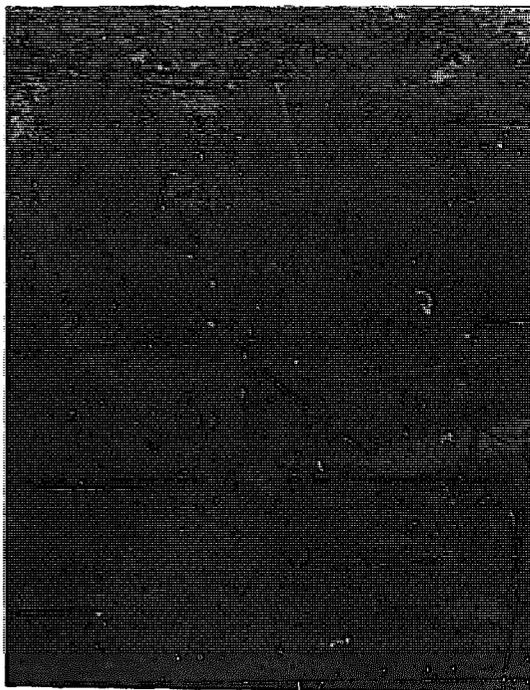

Walkway



SAT A , Swiss Association for Technical Assistance

TRAIL IMPROVEMENT

No. : 11.104

Maintenance Reports

Date : 27.2.77

Sig : *audan*

Bridge over Tamor Khola near Sinwa

Span: 83 m

Koordinates: $87^{\circ}42'$ / $27^{\circ}27'$

Actual condition of the bridge

This bridge is in a very dangerous condition. The tower (masonry tower) is partly broken. Also the planking is in a very bad condition. The best way to maintain this bridge is to built a new bridge.




Front view of the bridge

Tower left bank



Detail of planking

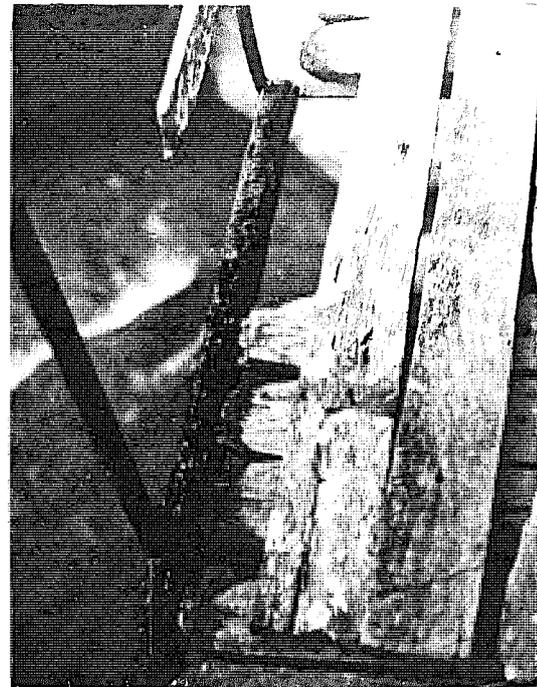

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

TRAIL IMPROVEMENT

Maintenance Reports

No. : 11.105

Date : 27.2.77

Sig : *landan*

Bridge over Tamor Khola near Numa Khola Dhoban

Span: 63 m

Koordinates: $87^{\circ}44.9'$ / $27^{\circ}29'$ Map 72 M/11

Actual condition of the bridge


Due to the length of the bridge the wind load is quite high. This bridge does not have windguy anchorage. Due to that it wings very much in windy times.

Works required to do

- Windguy is very necessary.



Front view of the bridge

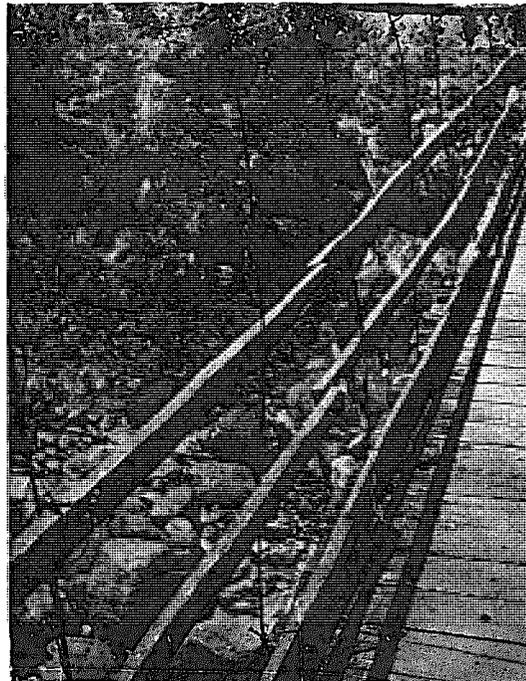

Detail of the bridge

TRAIL IMPROVEMENT

No : 11.106

Maintenance Report

Date : 27.2.77

Sig : Pandan

Bridge over Tamor Khola near Simbua Khola Dhotan

Span: 43 m

Koordinates:

Actual condition of the bridge


This bridge fell down on 2020. With the remaining parts they built this new bridge. But one of the cable is in a very bad condition. The bridge itself is not bad but the cables will not work for a long time.

Works required to do

- New main cables



Walkway

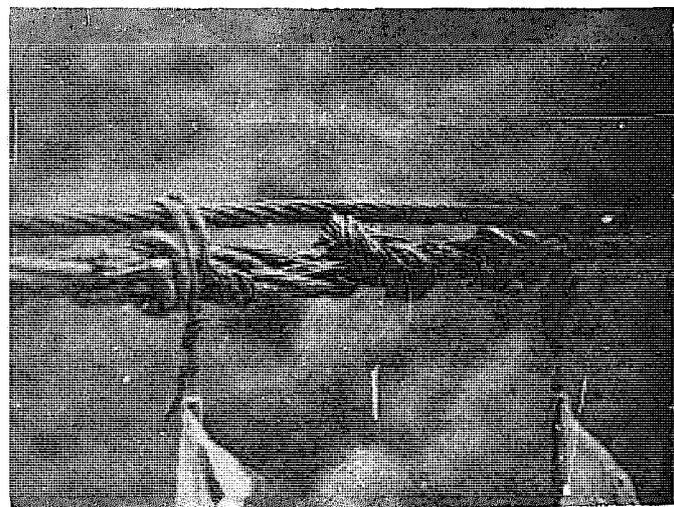

Cable connection

TRAIL IMPROVEMENT
Maintenance Reports

No. : 11.107

Date : 27.2.77

Sig : *Pandau*


Bridge over Tamor Khola

Span: 25 m

Koordinates:


Actual condition of the bridge

On this bridge some maintenance work has been done some time ago. There is a new planking. So no more maintenance work is required at the moment.

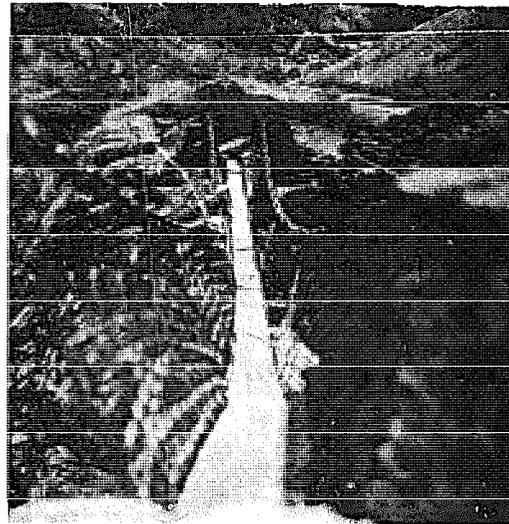


Walkway

Left bank

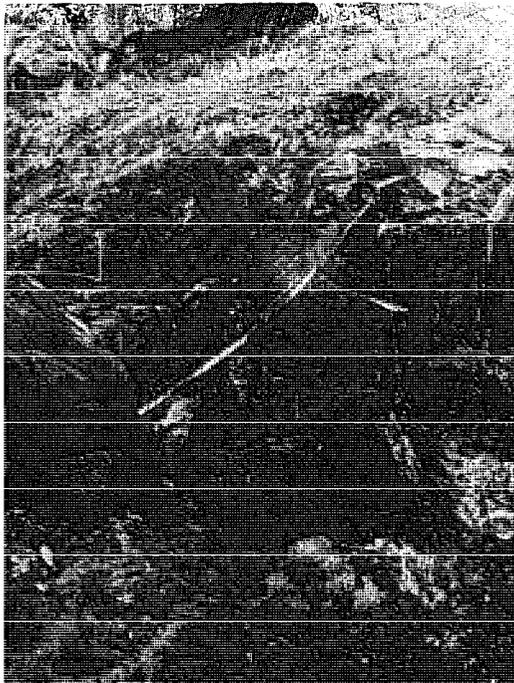

Right bank

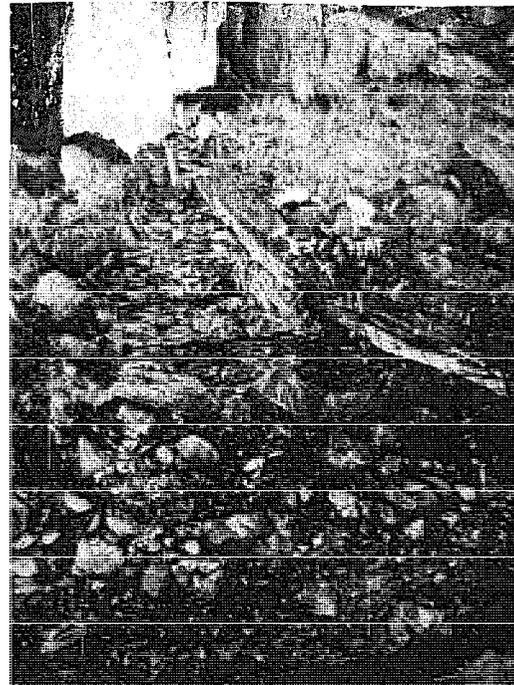

SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

TRAIL IMPROVEMENT
Maintenance Reports

No. : 11.108

Date : 27.2.77

Sig : Pandey

Bridge over Tamor Khola

Span: 23.30


Koordinates:

Actual condition of the bridge

The suspenders are not attached in correct position. Also the planking is not very good. The sag of this bridge is too less.

Works required to do

- ✓ Correct the suspender-position
- Repair the planking
- Correct the cable-position

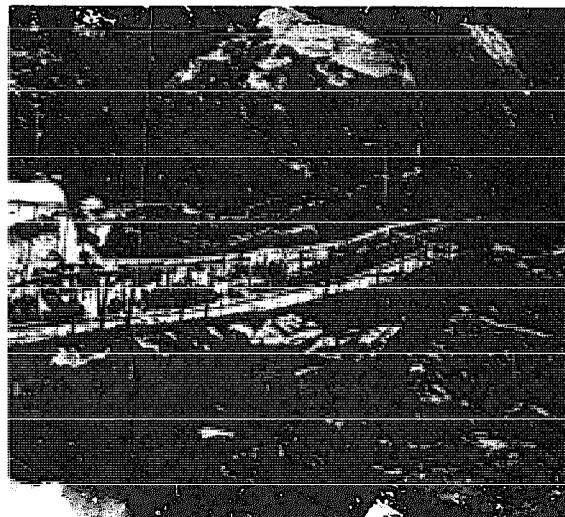



Walkway



Left bank

Right bank

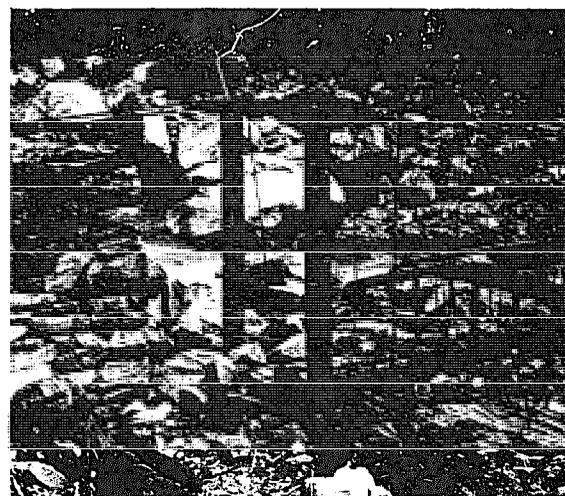

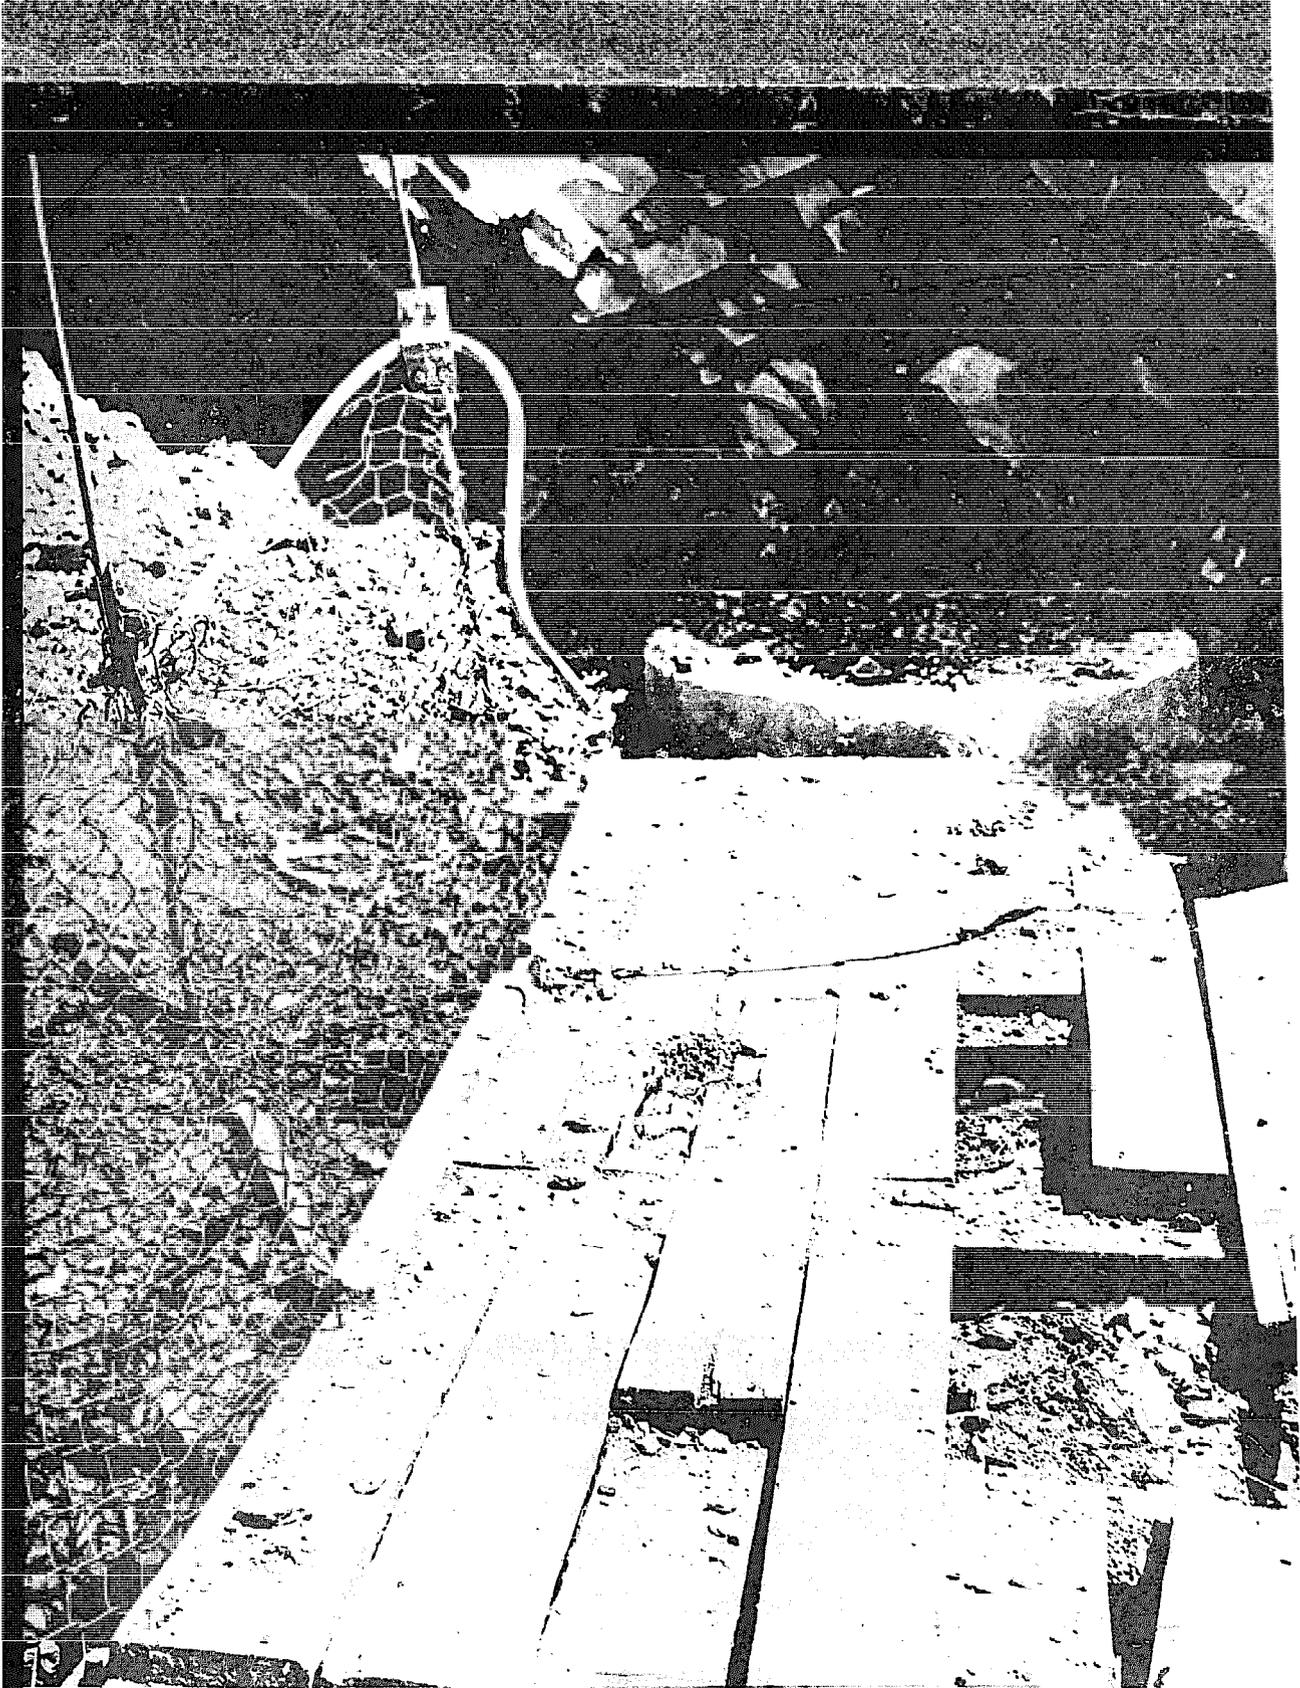

12. MAINTENANCE

MAINTENANCE

General

No : 12.101

Date : 1st March 77

Sig : *[Signature]*

It is a generally uncontested fact that constructions should be checked regularly and require periodic maintenance work. If this is neglected the constructions are damaged and if they are not maintained regularly, the costs for repairs become unreasonable. They may even collapse which leads to expensive new constructions.

In tragic cases even lives may be lost. A bridge does not fulfill its purpose if for example it becomes useless due to lack for other routes.

It is legitimate to wish that existing and new bridges can be checked and maintained by a repairs service. To make this possible the following is necessary :


- a record of existing constructions
- a supervision service
- plans for the necessary repair work
- money
- organisation and execution

The following two maintenance reports have been added to the record of existing constructions which are in need of maintenance and repair work (refer to pages 12.201 to 12.303). Maintenance reports compiled by SATA - Engineers may provide a solution as to how to report on bridges which are in need of maintenance work.

It is important to mention that the reports should contain exactly what material and work are necessary. This type of report could easily be written up for example when visiting building sites.

However it seems important to me to stress the fact that the organisation of maintenance is a component of the construction work. A bridge is not finished just because it has been inaugurated and opened to the public.

CONSTRUCTION PHASES

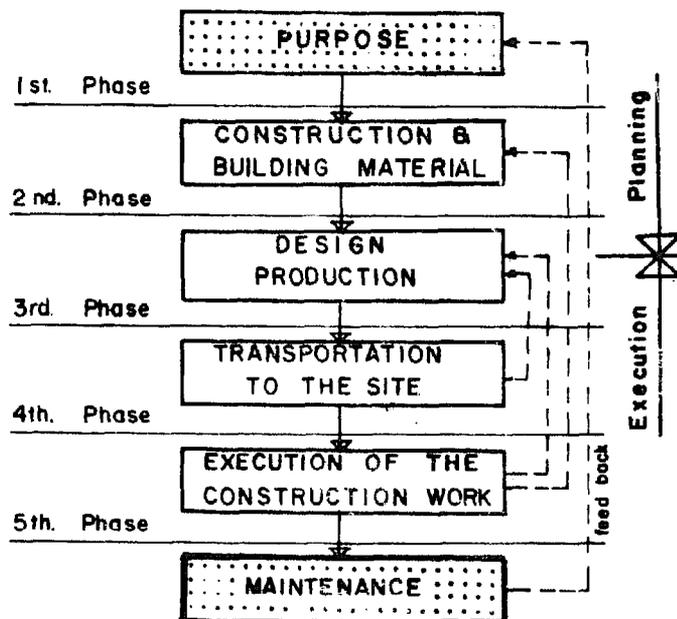

SATA, Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

MAINTENANCE

Maintenance Report of the Adamghat Suspension Bridge

No. : 12.201

Date : 1st March 77

Sig *Phell*

Adamghat Suspension Bridge, completed 1977
Trisuli River, Span 113,20 m


Condition of the Bridge on April 1976

Presently the wind guy cables are hanging useless. The tie rods to the walk-way (gangway) cable are not in the correct positions nor are they attached properly. Because of this the bridge swings too much and the walk-way is slightly crooked. The windguy anchor blocks are placed completely out of the center line of the wind guy cable. The main anchorage on the right bank is needing a lot of backfilling, otherwise there will once be an erosion problem.


Work required for finishing the bridge

- a) Backfilling on the top behind the main anchorage block on the right river bank; about 25 M3
- b) The wind tie rods have to be replaced with wind tie cables $\phi 3/8"$.
- c) There are on every second suspender one hand rail cable to be fixed.
- d) The walk way cable should be tightened properly.

View of the left main cable anchorage block

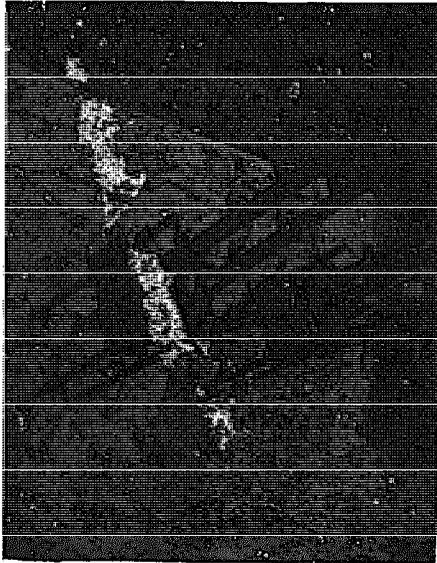

The wrong placed wind guy anchor block on the left river bank

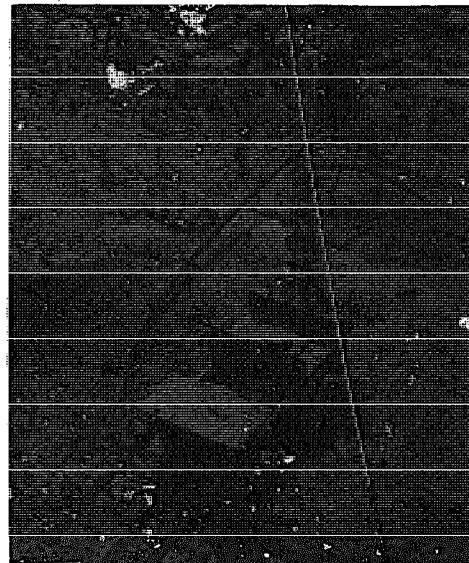


MAINTENANCE

No. : 12.202


Maintenance Report of the Adamghat Bridge (continuation)

Date : 1st March 77


Sig : *[Signature]*

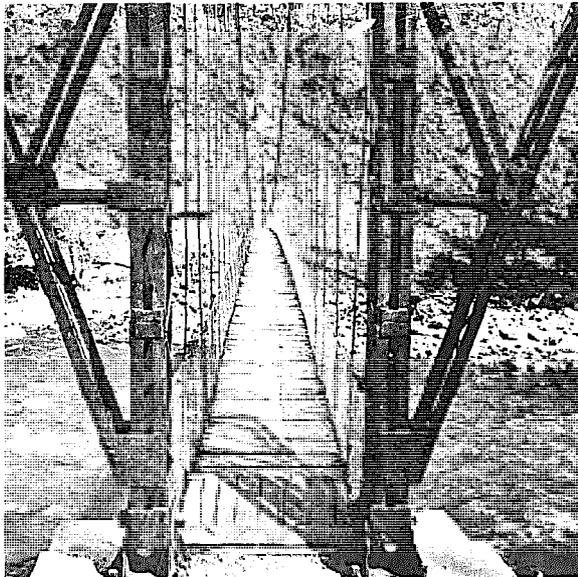


walk-way of the Adamghat bridge

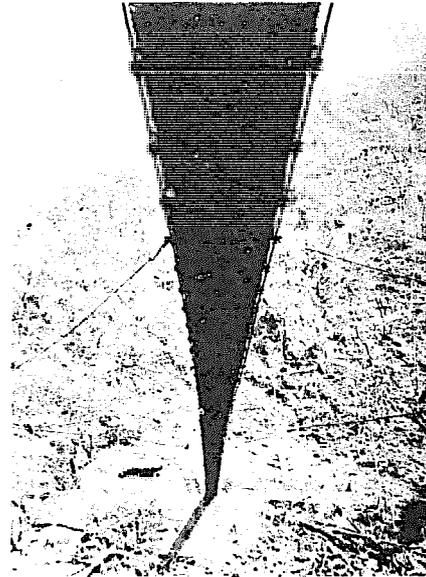

soffit of the bridge

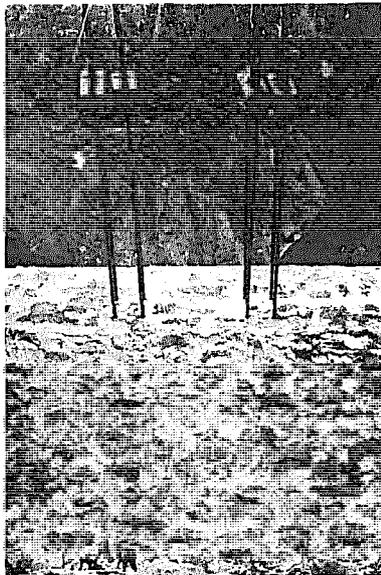

front elevation of the main anchorage block on the left bank

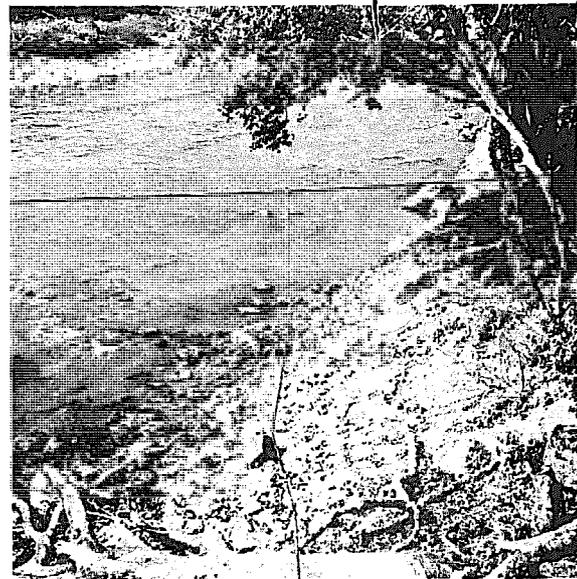

untightened wind tie is to replace with cables

SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

MAINTENANCE

No. : 12,301

Maintenance Report of the Jairamghat Suspension Bridge

Date : 1st March 77

Sig *HoK*

Jairamghat Bridge, Dudh Kosi

1. Condition of the bridge on 29 Jan. 1976

Presently the wind guy cables are hanging useless. The tie rods to the walkway cable are not in the correct positions nor are they attached properly. Because of this the bridge swings too much when the wind blows and the walkway is crooked. One wind guy anchor block is being eroded by a stream when it rains.


The suspender rods are presently attached to the walkway cable clamps with only one 5/8" Hex. Nut. In addition many of these nuts are missing. Each attachment requires two 5/8" Hex Nuts.

Some decking planks are also worn out and should be replaced.

2. Work required for repair

a. Wind Guy Cables:

New tie cables should be installed on the entire bridge.

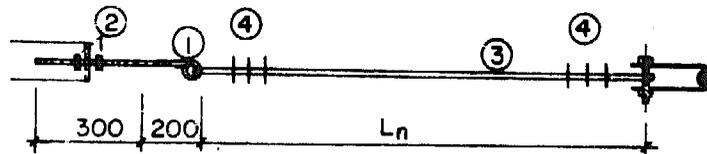

Pos	face (mm)	PC
1.	$\phi 16$ 300 200	18
2.	5/8" Nut	54
3.	Cable 3/8" ϕ $l_1 = 2.0\text{m}$ $l_2 = 4.5\text{m}$ $l_3 = 8.0\text{m}$ $l_4 = 12.5\text{m}$	4 4 4 4
4.	Bulldogrip 3/8"	100

$L_1 = 0$
 $L_2 = 0.55\text{m}$
 $L_3 = 2.45\text{m}$
 $L_4 = 5.66\text{m}$
 $L_5 = 10.16\text{m}$

S A T A . Swiss Associates for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

MAINTENANCE

No. : 12.302


Maintenance Report of the Jairamghat Bridge
(continuation)

Date : 1st March 77

Sig *H. H.*

b. Suspender Rods:

Second nuts should be attached and existing nuts tightended. One walk-way cable clamp is also required.

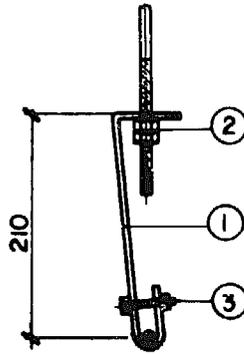

Walk - Way Cable Clamp

		Pcs.
1	Flat 350/65/8	1
2	5/8" Nut	210
3	3/4 x 1/2" ϕ Bolt - Nut	1

c. Decking:

Six or seven planks should be replaced.

3. Costs

Steel and cables	3500/-	Nc
Work and transportation	1000/-	Nc
T o t a l	4500/-	Nc
=====	=====	=====



Tie rod and connection to walkway

MAINTENANCE

Maintenance Report of the Jairamghat Bridge
(continuation)

No. : 12.303

Date : 1st March 77

Sig. *Halk*



Tie rods and windguy cable




The windguy cable is not
in the correct position.
It should be a parabola
and not straight.

S.A.T.A., Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

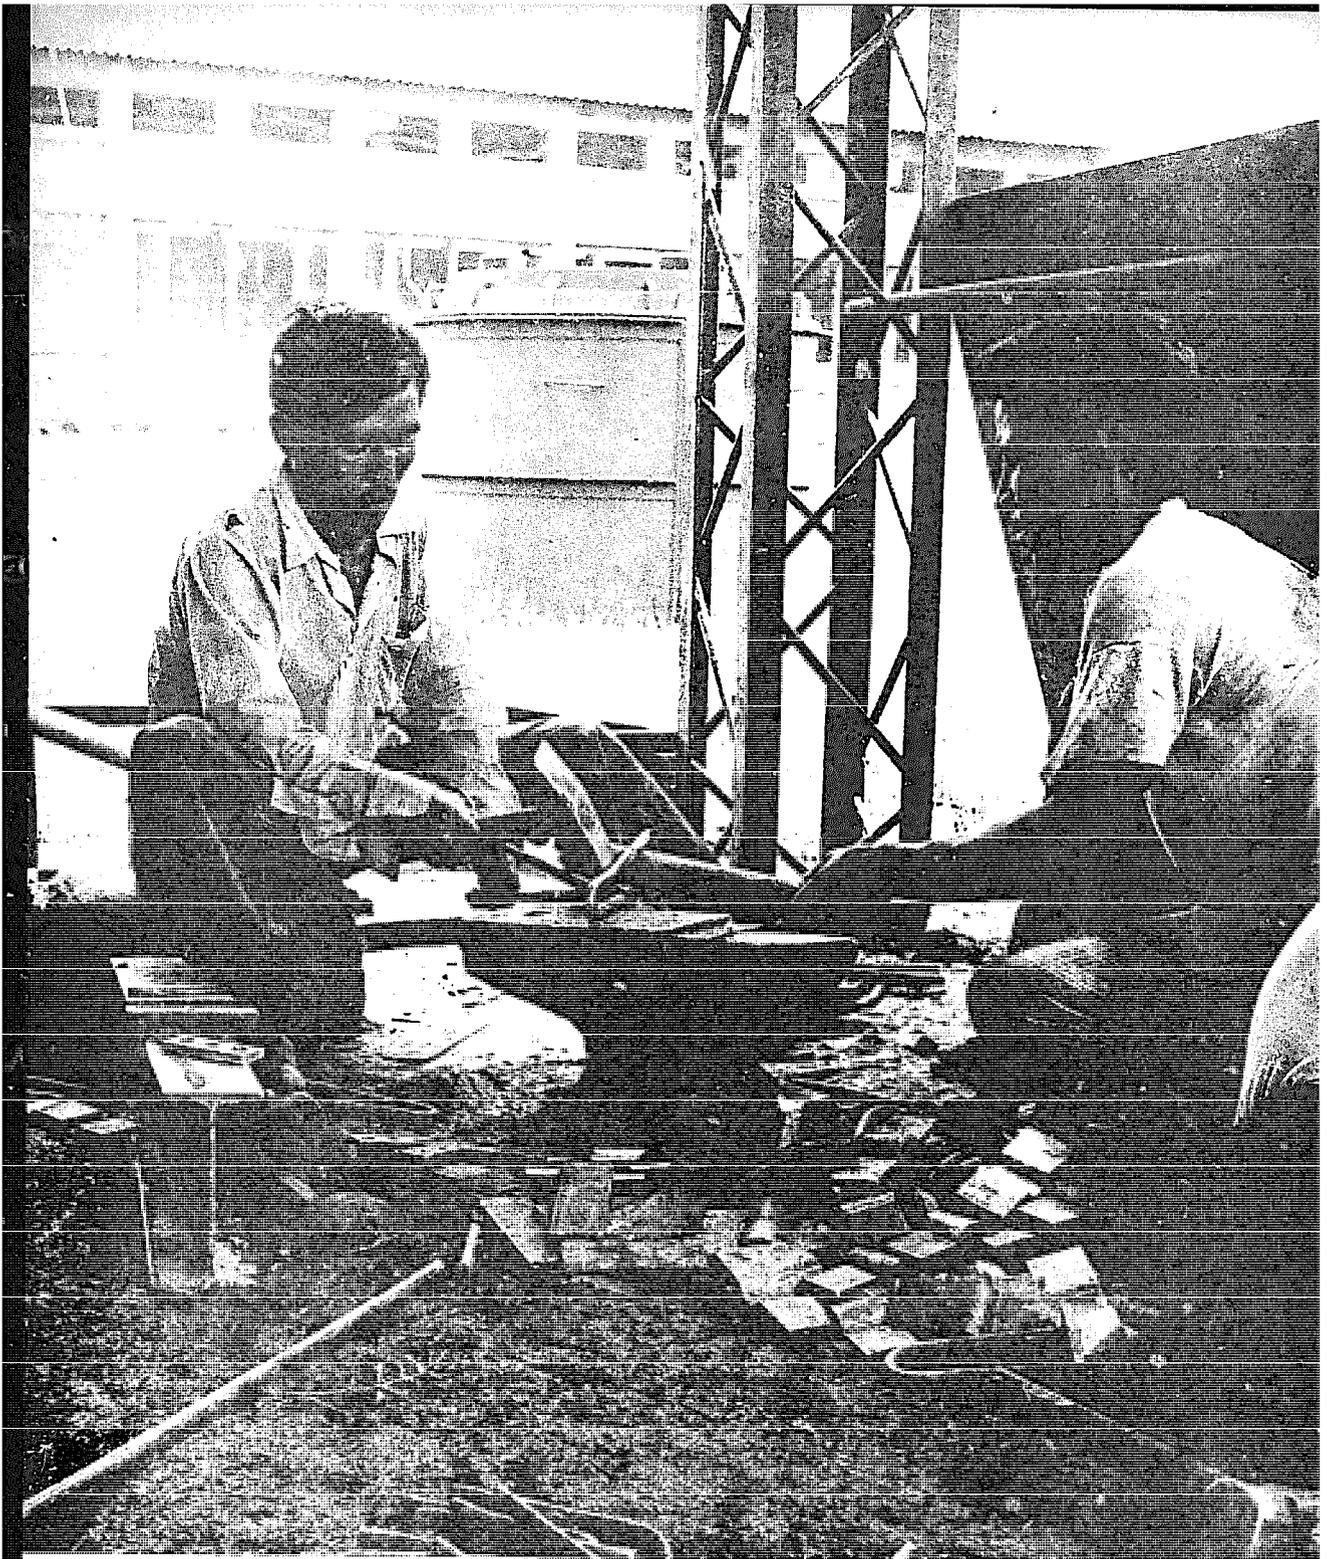

13. PHOTOS OF STANDARD STEELPARTS

PHOTOS OF STANDARD STEELPARTS


No : 13.101

Suspension Bridges

cross-beam of main anchorage
pylon bracing element

Date : 1st March 77

Sig : *for [Signature]*

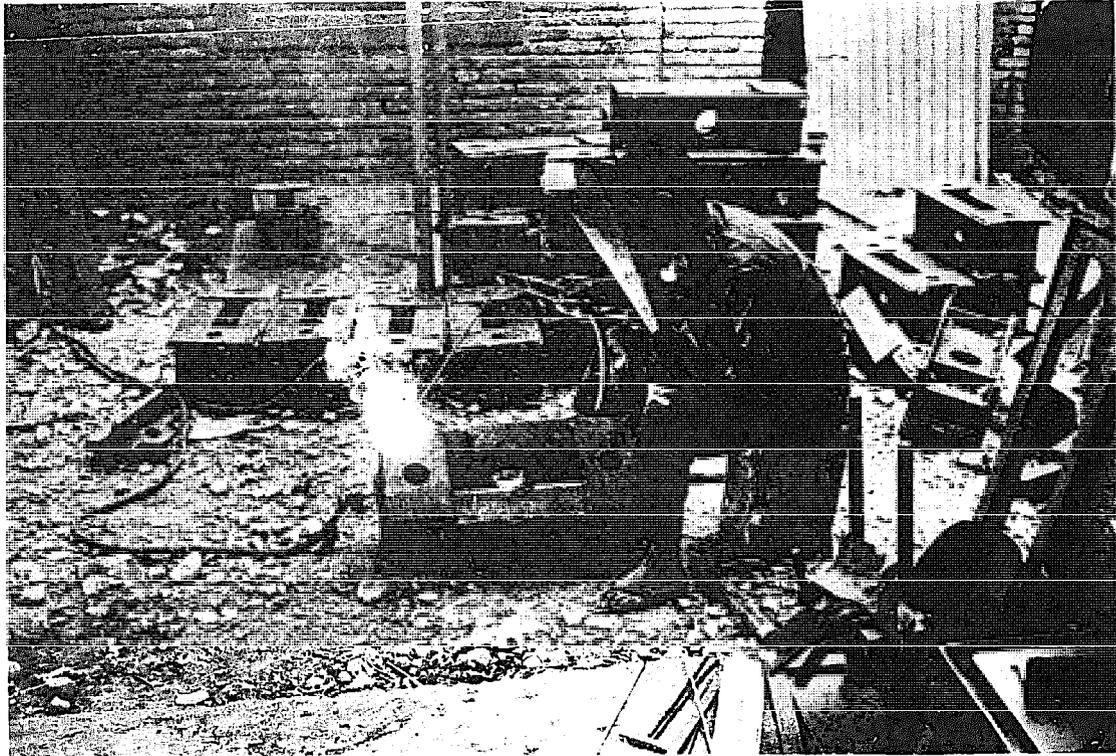

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

PHOTOS OF STANDARD STEELPARTS



No : 13.102

Suspension Bridges

pylon's cable saddle
column shaft hinge element

Date : 1st March 77

SIG : *[Signature]*

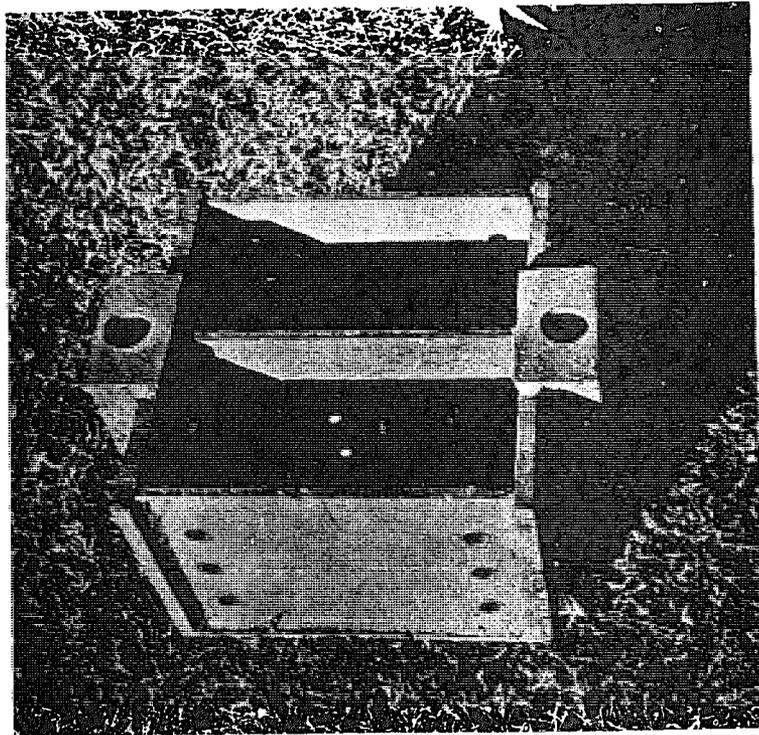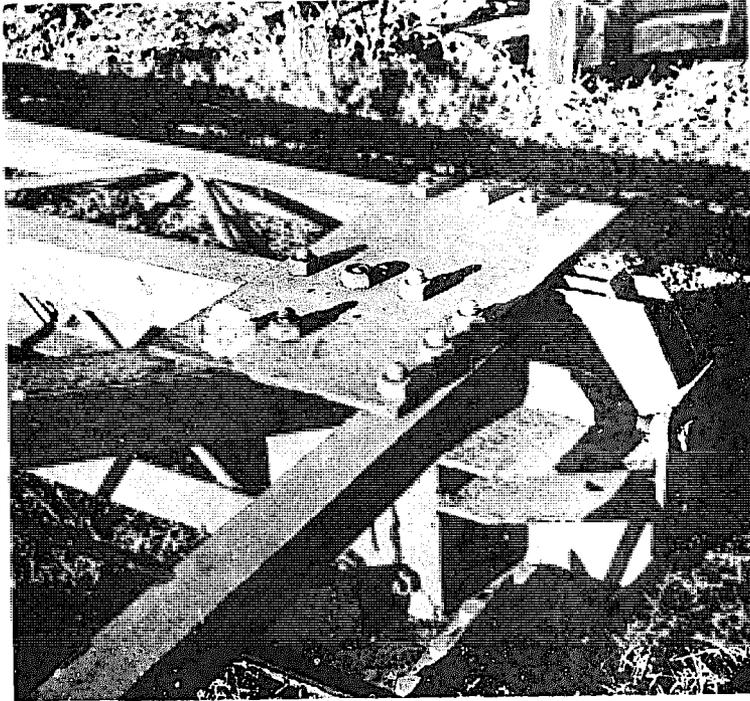

SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

PHOTOS OF STANDARD STEELPARTS



No. : 13.103

Suspension Bridges

connecting plates
pylon's shop assembly

Date : 1st March 77

Sig : *[Signature]*

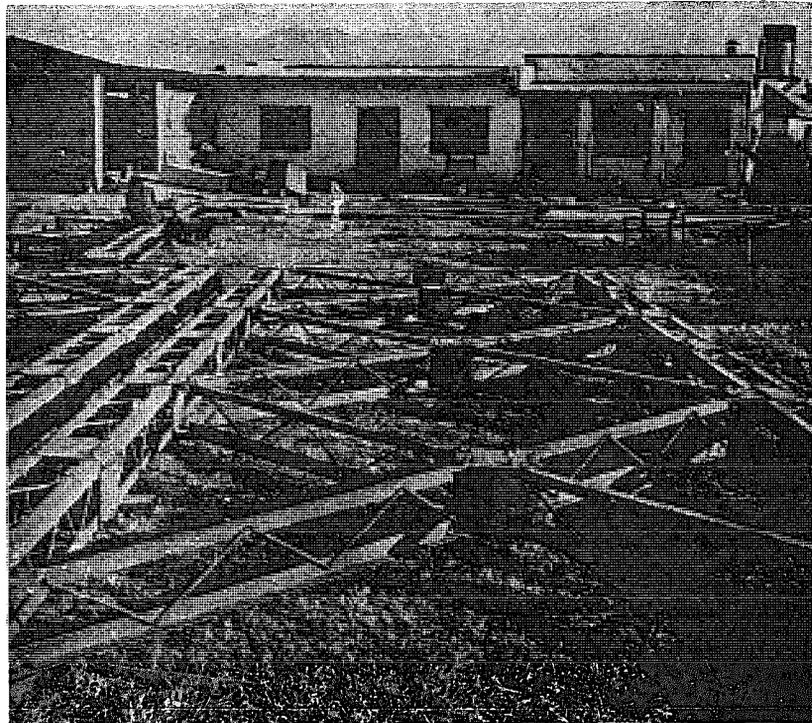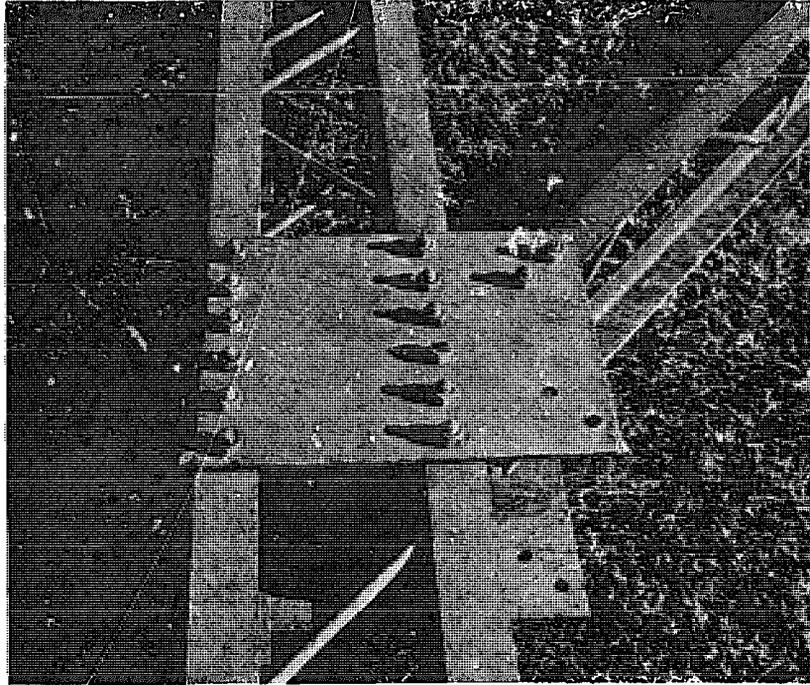

S A T A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

PHOTOS OF STANDARD STEELPARTS



No. : 13.104

Suspension Bridges

walk-way column element
J-bolt for walk-way

Date : 1st March 77

Sig : *Geo P. H.*

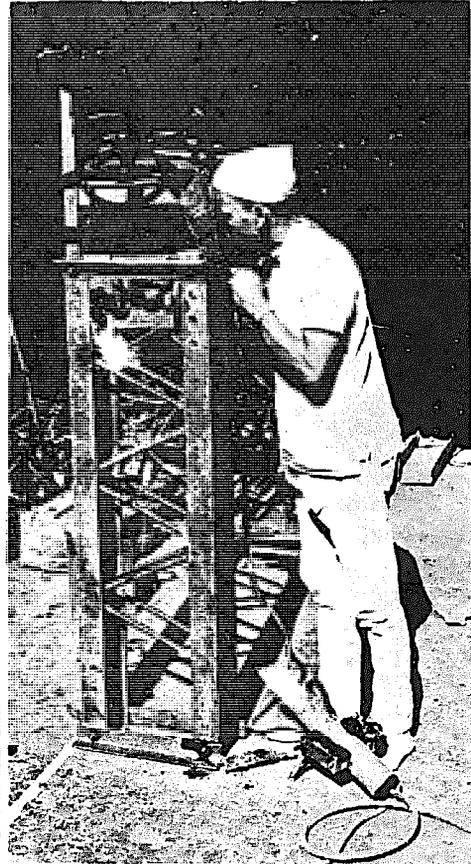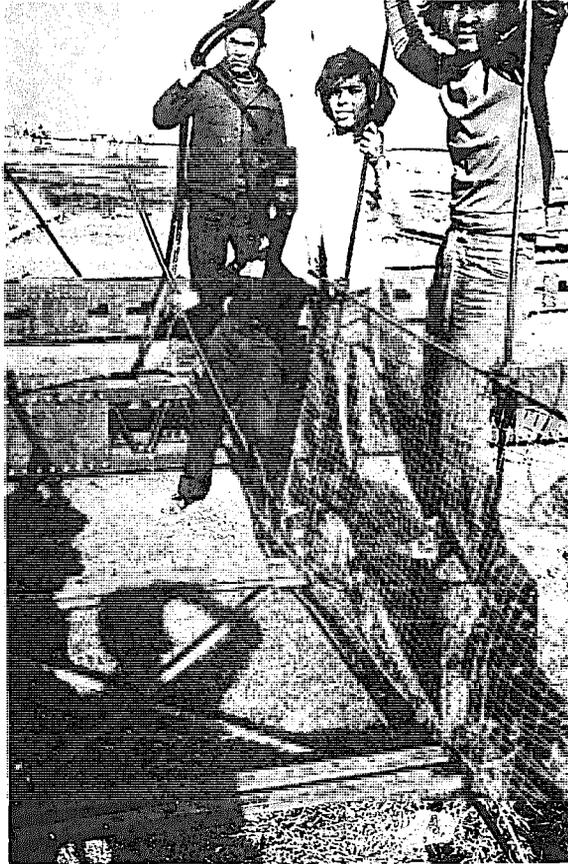

SAT A, Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge

Division

PHOTOS OF STANDARD STEELPARTS



No. : 13.201

Suspended Bridges

main cable drum anchorage
main cable-end clamp

Date : 1st March 77

Sig : *[Signature]*

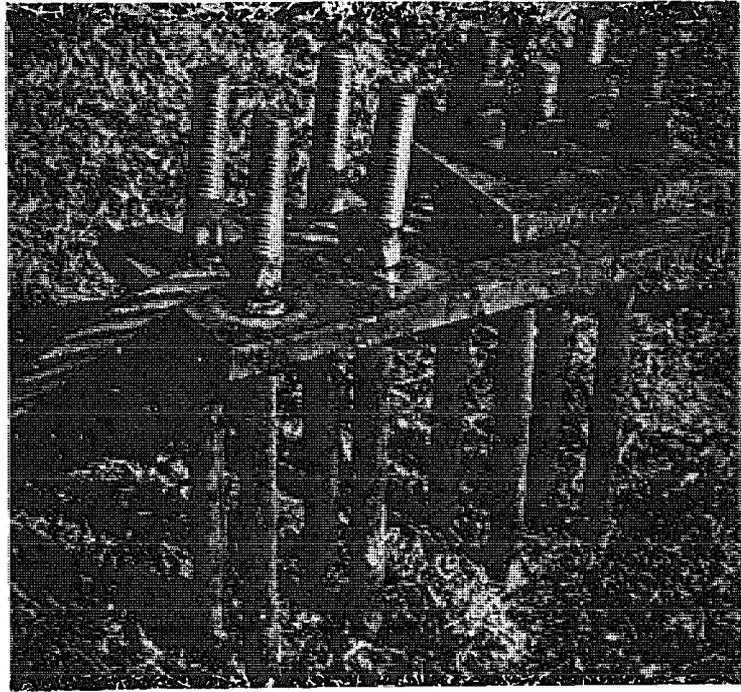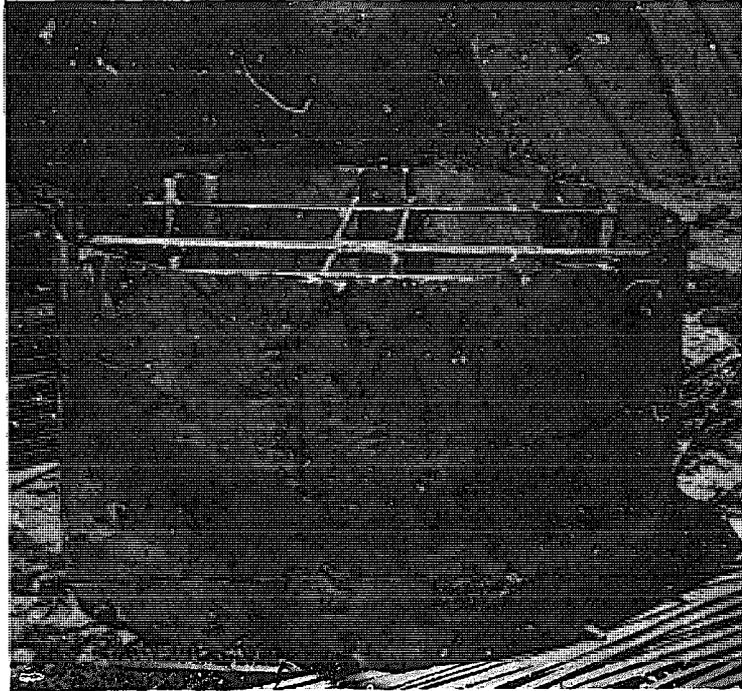

SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

PHOTOS OF STANDARD STEELPARTS




No. 13.202

Suspended Bridges

main anchorage unit (s.e.)
main anchorage unit (r.e.)
cable saddle

Date 1st March 77

Sig : *[Signature]*

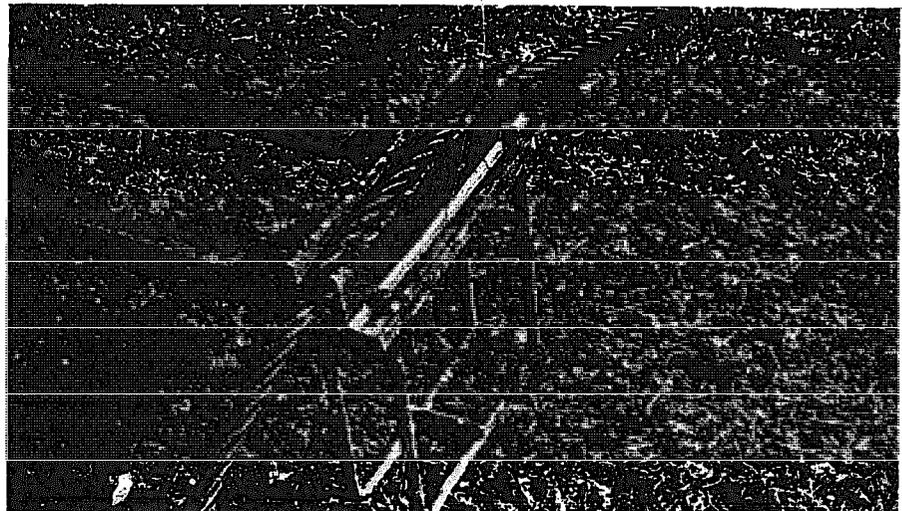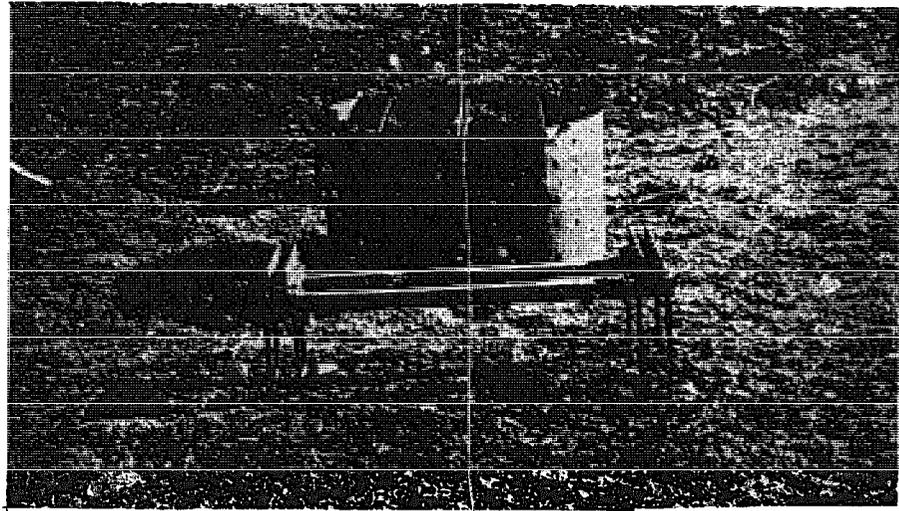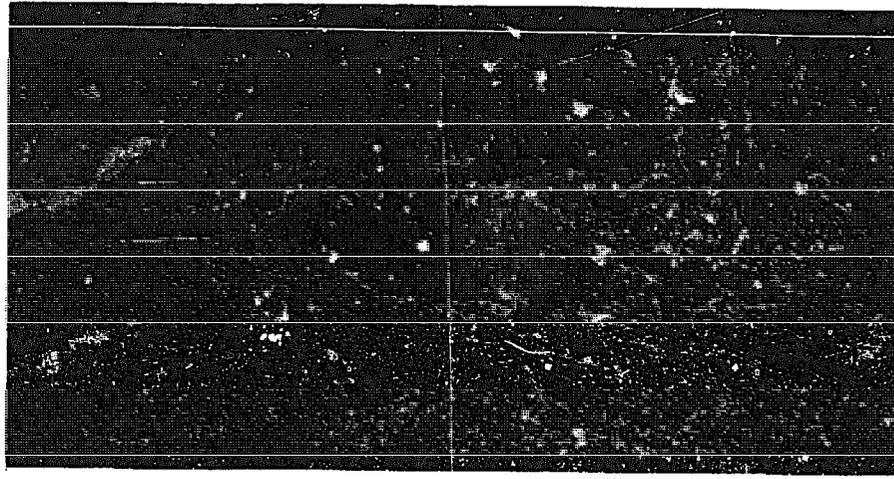

SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

PHOTOS OF STANDARD STEELPARTS



Suspended Bridge

walk-way's shop assembly
hand-rail cable anchorage

No. : 13.203

Date : 1st March 77

Sig : *[Signature]*

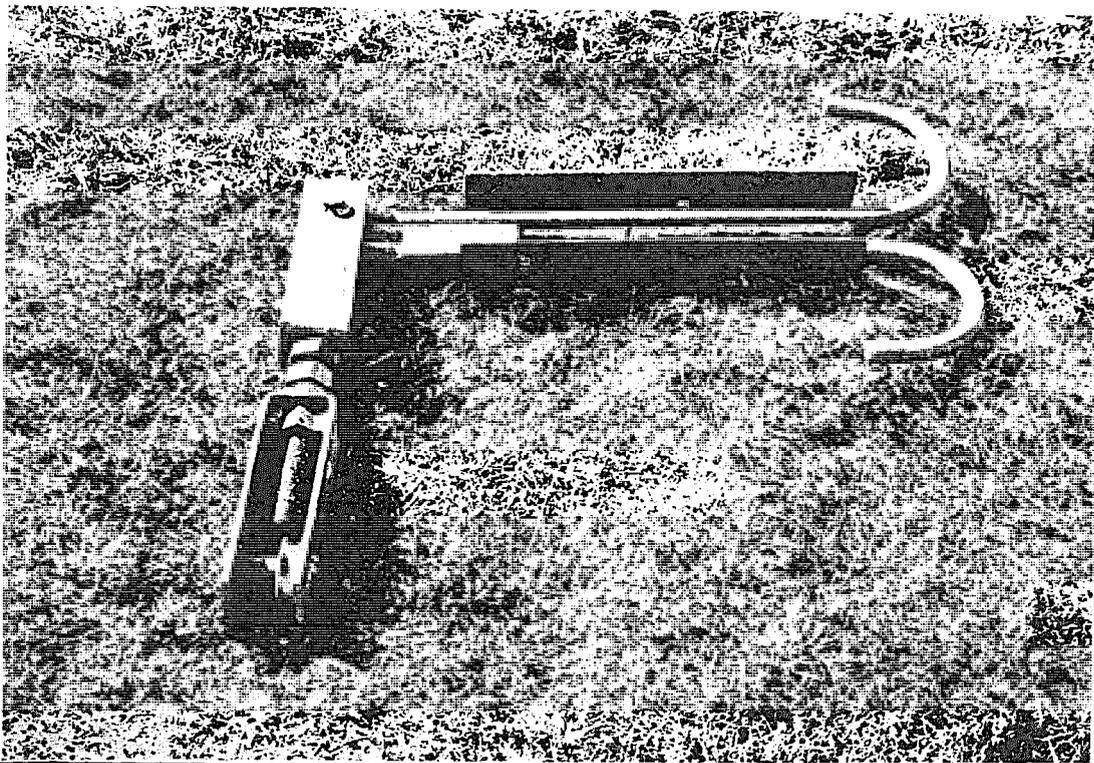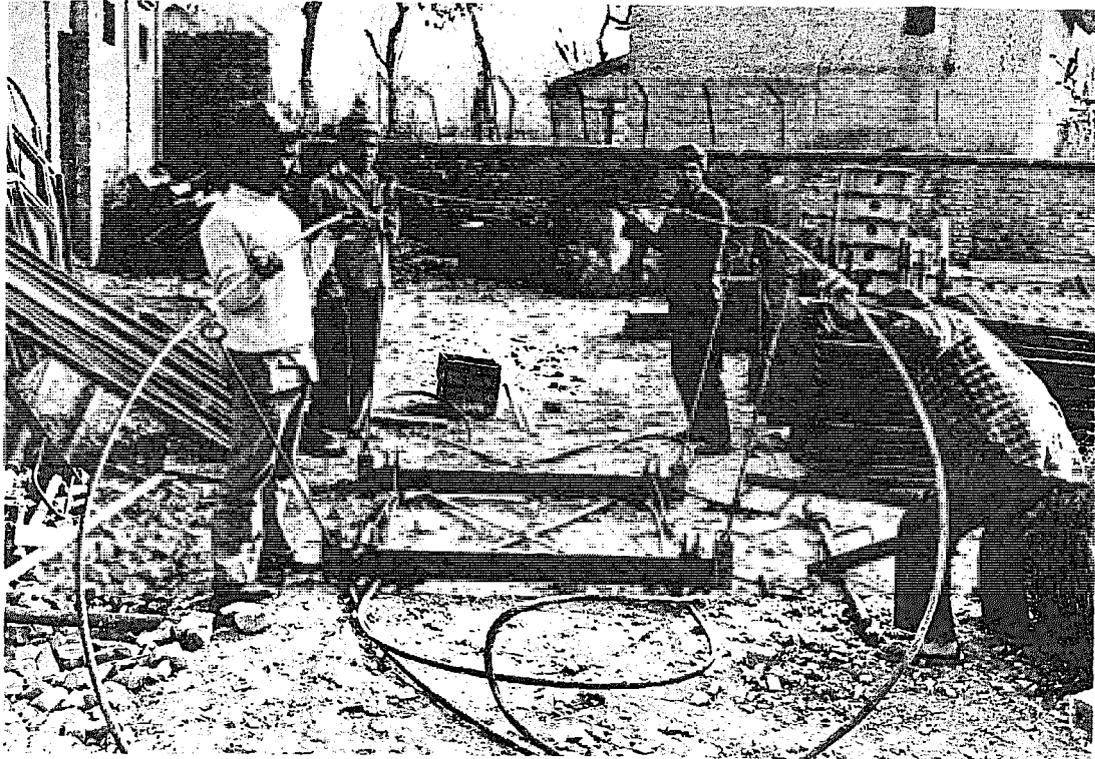

SAT A , Swiss Association for Technical Assistance

HMG Nepal

Roads Department

Suspension Bridge Division

INDEX

A

Access to the bridge, 3.801
Active earth pressure, 3.501 ff, 3.801, 3.804
Active wedge, 3.801
Adamghat 12.201 ff
Allowable bearing pressure, 3.102
Anchor bars, 3.604, 3.704 ff, 3.918
 blocks, 3.601, 3.701 ff, 8.104, 9.302 ff, 9.312, 10.704
 hook, 3.918
 parts, 9.309, 9.311 ff, 10.703, 7.214, 5.203 ff
 rods, 3.204, 9.204, 9.312
 wall, 3.801 ff
Anchorage parts, 7.214, 9.309, 9.311 ff, 10.703
Anchorage
 Typ No. 1, 3.601 ff
 Typ No. 2, 3.601, 3.603
 Typ No. 3, 3.601, 3.604
 Typ No. 4, 3.601, 3.605
Angle, 5.301
Angle
 internal friction, 3.801, 3.804
 repose, 3.501, 3.801
 trigonometry, 3.912
 wall friction, 3.502
Approach trail, 4.103
Arcus 3.912
Area, 3.915 ff
Assembly, 7.501, 7.503, 10.101 ff
Auger boring, 4.303
Available Standard Drawings, 2.305, 2.404
Axial force, 3.908 ff

B

Backfill
 Compaction, 3.401, 3.801
 Drainage, 3.401
 Filling, 3.401, 12.202
Back stay angle, 2.101, 2.302
Back stay cable, 2.302
Bars, 5.305
Base, 2.304, 7.502, 9.307
Base of the Pylon, 2.304
Batter, 3.505
Bearing
 capacity, 3.102
 reaction, 2.304
 rivet and bolt, 5.304

Bench mark, 4.210
Bending moments, 3.803, 3.911
Bi-axial compressed foundation, 3.803, 3.901 ff
Black bolts, 5.304
Blasting, 9.202
Blocks, refer to anchor blocks etc.
Bolting, 7.501
Bolts, 5.304
Bond stress, 3.605
Boring, 4.302
Boulders, 3.101, 4.305
Bracing, 2.101, 2.302, 2.501, 13.101 ff, 13.202 ff
Breaking load, strength, 2.802, 5.103 ff
Breast wall, 3.505
Bridge
 centre line, 8.105
 costs, 4.101, 7.101 ff, 7.201 ff, 7.301 ff, 7.401 ff
 design, refer to chapters 2. Bridge Design and 3. Structural Analysis
 wire, 2.605, 5.106, 10.701 ff
 position, 8.101 ff
 suspended, 2.102, 2.401 ff, 7.301 ff, 9.309, 10.601, 13.201 ff
 suspension, 2.101, 2.301 ff, 7.401 ff, 13.101 ff
Buckling, 5.501 ff
Bulldog grips, 5.202
Buttressed wall, 3.504
Butts, 7.502

C

Cable, 2.304, 2.802, 5.102 ff,
 break, 6.304
 c - clamp, 5.202
 car, 2.701 ff
 end clamp, 5.203 ff, 13.201
 length, 2.403, 2.601, 2.604
 saddle, 13.102, 13.201
 weight, 5.102 ff
Camp establishment, 7.202, 7.222
Caps, 7.502
Cat - walk, see suspended bridge
Cat - walk, 10.701 ff
Cat - walk cable bridge 2.401 ff
Centre of gravity, 3.703, 5.301 ff
Centre line, 8.105
Central suspender, 10.301
Chacklighat, 1.103
Channels, 5.302
Check up, 10.501, 10.801
Chilimay Khola, 1.112

Classification, 4.305, 4.309
Clay, 3.101 ff, 4.305
Clearance, 7.501
Cobble, 4.305
Coefficient
 active earth pressure, 3.502, 3.801, 3.804 ff
 friction, 3.501, 3.601 ff, 5.203 ff
 passive earth pressure, 3.801, 3.804 ff
Collection of material, 9.101
Colour indication, 3.917
Column base, 2.304
Column element, 2.302, 5.501, 7.502, 13.101 ff
Completed bridges, 1.301
Concentrated single load, 2.701 ff
Concrete, 5.401, 9.301, 9.306 ff, 3.908 ff, 3.803
Condition of roads, 7.601 ff
Connecting plates, 2.302, 10.103
Construction chart, 7.101
Container, 9.204
Conversation tables, 3.913 ff
Cross beam, 2.301, 2.401, 2.804
Cosine, 3.912
Cost, 4.101 and chapter 7. Cost estimate
Counterfort wall, 3.504, 3.508
Curvature, 10.801
Cutting, 5.103, 7.501

D

Damage, 5.101
Dead - Load, 2.301, 2.303, 2.401, 2.403
Dead load sags, 2.303, 2.403, 2.901
Deadman, 3.801 ff
Decreasing of sags, 2.806
Deflection, 3.911
Delivery, 7.302, 7.403
Design specification, 2.301 ff, 2.401 ff, 2.501
Devighat, 1.203
Dhaunebagar, 1.102
Diagonal system, 2.501
Dilatancy, 4.306
Dimensioning of reinforced concrete, 3.706 ff, 3.908 ff
DIN 1052 (Buckling Numbers), 5.502
Distance, 4.208, 4.213 ff, 7.601
Double eccentric loading, 3.901 ff
Drainage, 3.401
Drawing, 2.305, 2.404

Dressing, 7.211
Drill bits, 6.107
Drilling, 9.202, 6.101 ff
Drum anchorage, 5.203 ff, 13.201 ff
Drystone retaining wall, 3.505
Dry strength, 4.306
Dynamic behavior, 2.602

E

Earth pressure, 3.501, 3.506
 coefficient, 3.502, 3.801, 3.804 ff
 resistance, 3.501, 3.801
 timbering, on, 3.201
Eccentricity, 3.701
Eccentric loading, 3.901 ff
Elastic elongation, 2.601
Elongation, 2.601
Establishment of the camp, 7.202, 7.222
Erection hook, 10.101 ff, 10.206
Evaluation, 4.401 ff
Equal angles, 5.301
Excavation, 3.201, 3.201 ff
Execution, 7.101 ff, chapter 9., 12.101

F

Fabrication, 7.301 ff, 7.401 ff, 7.501 ff
Fabrication points, 7.601
Factor of friction (sliding), 3.501, 3.601 ff, 3.604 ff,
 3.701, 3.708, 5.203 ff
Factor of safety, 2.303, 2.403, 3.701, 3.705, 3.801 ff
Feed back, 12.101
Feet, 3.914
Fibre core construction, 5.105, 10.701 ff
Fibre glass planks, 7.218
Field anchors, 6.304
Field welding, 7.503
Finish off, 10.501, 10.801
Fitting, 10.601 ff
Fixation cable, 2.301, 2.401 ff, 9.307
Fixing, 8.103
Foundation, 3.301, 3.501, 3.708 (see anchor blocks)
Friction resistance, 3.503, 3.802 (see sliding, safety)
Free board line, 2.101 ff, 3.301

G

Gabion wall, 3.301, 3.504, 9.401
Gangway, see walk way
Geometry of the pylon, 2.304
Golgunj Khola, 1.113
Gravel, 3.101, 4.305, 9.101
Gravity block, 3.601 ff, 3.701
Gravity/Earth block, 3.601, 3.603
Gravity/Rock block, 3.601, 3.604, 3.704
Gravity wall, 3.504, 3.507
Gridding, 6.107
Ground surface, 3.401, 3.505, 3.603, 3.801 ff, 3.805

H

Habegger, 6.303
Handling, 7.501
Hanger, 2.401 ff, 10.602
Hand rail cable, 2.301, 2.401, 13.203
Heel, 3.508
Height of the pylon, 2.303 ff, 7.216
Hinge, 2.502, 2.807, 13.101 ff
Winged Pylon, 2.302, 2.807, 13.101 ff
Hoist block, 6.201 ff
Hoisting, 10.105, 10.201
Hook, 3.917
Holing, 7.501
Horizontal force, 2.601 ff, 2.701 ff, 2.807
Horizontal distances, 4.213 ff
Hydrology, 4.103

I

Inclination of slope, 3.201
Inclined bottom, 3.708, 3.905
Inclined span, 1.102, 1.108, 2.401, 2.604
Increase in sag, 2.303, 2.403, 2.601, 2.604
Increasing of span, 2.805
India cable, 5.103
Inspection, 7.503
Internal angle (friction), 3.501, 3.801
Interpolation, 4.401

J

Jairamghat, 12.301 ff
Japan cable, 5.103
Jauljibi, 1.107
Joint sealer, 5.203 ff

K

Key, 3.503, 3.508
Khoranga Khola, 1.117
Kinks, 5.101
Kothe bridge, 1.105

L

Laboratory test of soil, 4.304 ff
Layers, 3.401, 3.801
Lay out, 8.104, 8.201, 9.308, 9.310
Length of the cable, 2.403, 2.501, 2.604, 2.701
Levelling, 4.210
Levelling instrument, 4.216 ff
Limestone, 4.308
Load
 dead, 2.301, 2.403, 2.403
 live, 2.301, 2.303, 2.401, 2.403
 wind, 2.301, 2.401, 2.501
 full, 2.303, 2.403, 2.501
Local material, 4.103
Location, 4.102
Lodey Ghat, 1.115
Lubrication, 10.207

M

Machining, 7.502
Main anchor block, 3.804, 9.104, 9.302, 9.304, 9.311 ff,
 refer also to anchor block
Main cables, 2.303, 2.403
Maintenance, 11.101 ff, 12.101, 12.201 ff, 12.301 ff
Mangmaya Khola, 1.108
Marking, 7.503
Masonry work, 7.211, 9.306 ff
Material, 4.103, 5.101 ff, 5.201 ff, 5.301 ff, 5.401 ff,
 5.501, 9.101
Max. soil pressure, 3.102, 3.508, 3.701, 3.901 ff
Mensuration, 3.915 ff
Methods of survey, 4.201 ff
Moments, 3.803, 3.911
Mortar container, 9.204

N

Netting, 2.301, 2.401
Network (roads), 7.601
Nibu Khola, 1.111
Nomenclature
 Suspended Bridges, 2.101
 Suspension Bridges, 2.101
 Tools, 6.401

O

Overturning, 3.501, 3.503, 3.701
Operation and Maintenance, 6.102 ff

P

Packing, 7.503
Painting, 7.205; 7.218 ff, 7.225, 7.236, 7.502
Parabola, 2.201 ff, 2.204, 2.601, 2.604
Parabolic system, 2.501
Parallel wire cluster, 10.701 ff
Papapets, 2.301, 2.401
Passive earth pressure, 3.501, 3.801, 3.804 ff
Passive wedge, 3.801
Pebbles, 3.101
Pedestrian bridges, 1.301
Pikuwa Khola, 1.116, 4.205, 4.309
Pitching, 3.505
Pjionur, 6.101 ff
Placing of foundation, 3.301 ff
Placing of steel parts, 9.312
Planks, 2.402, 5.501, 7.218
Planning, 1.302, 7.101, 12.101
Plates, 5.303
Plotting work, 4.401
Plumb concrete, 5.401
Pre - stress, 2.304, 10.801
Profile, 4.202
Protection, 9.401
Pulley, 6.201 ff, 6.304
Pulling machine, 6.301 ff
Purchudi Hat, 1.110
Pylon, 2.302 ff, 7.216, 10.101 ff, 13.101 ff
Pylon
 anchorage, 9.304
 base, 2.304
 foundation, 3.903, 9.307
 geometry, 2.304
 height, 2.303, 2.304, 7.216
 reaction, 2.304

Q

Quotation
 suspended bridge, 7.301 ff
 suspension bridge, 7.401 ff
 terms of steelwork, 7.501 ff

R

Reaction, 2.304, 2.807
Recommended concrete mixes, 5.401
Reference points, 4.201
Reinforced Concrete, 3.803, 3.908 ff
Reinforcement, 3.707, 3.908 ff, 5.305, 7.301, 7.401, 3.803
Retaining walls, 3.501, 3.50 ff
 backfill compaction, 3.401
 backfill drainage, 3.401
 breast wall, 3.505
 battered wall, 3.504
 cantilever wall, 3.504, 3.508
 counterfort wall 3.504
 deadman, 3.801 ff
 design, 3.507
 drainage, 3.401
 drystone, 3.505
 earth pressure, 3.102, 3.501 ff, 3.801, 3.804
 foundation stability, 3.503
 gabion, 3.301, 3.504, 9.401
 gravity wall, 3.503, 3.507, 3.508
 overturning, 3.503
 placing 3.301 ff
 sliding, 3.501, 3.708, 3.801
 soil failure, 3.102, 3.503
 structural components, 3.503, 3.506 ff
 swedish circle methods, 3.302 ff
 types, 3.503 ff
Ribbed - Torsteel, 5.305
Riverbank, 9.401
Rivets, 5.304
Roads, 7.601 ff
Rock, 3.101, 4.203, 4.308
 anchor, 3.601, 3.605, 3.706 ff, 9.202 ff,
 bearing, 3.102, 3.605
 blasting, 9.202
 block, 3.601, 3.604, 3.704
 drilling, 9.202
 excavation, 9.201
 resistance, 3.604 ff
Rods, 3.918, 5.303
Ropeway Company, 5.105
Rounds, 5.303
Rubbels, 9.101

S

Saddle, 2.807, 13.102, 13.202
Safe bearing capacity, 3.102
Safety, refer to stability etc. , 7.501
Sags, 2.301, 2.303, 2.401, 2.403, 3.501
Sal, 5.501
Salla, 5.501
Sand, 3.101, 4.305, 9.101
Sandstone, 4.308
SATA, 1.301
Screw, 6.401
Sekhathum 1.109
Semigravity wall, 3.504, 3.508
Shearing, 3.705, 3.911, 5.304
Shear value, 5.304
Shipaghat, 1.201
Shop assembly, 7.501, 13.102 ff, 13.201 ff
Shoring, 3.201
Shuttering, 3.201, 9.301
Side stay
 anchor block, 3.906
 cable, 2.302, 2.304
 reaction, 2.304
Silt, 3.101 ff, 4.305
Sine, 3.912
Single cable, 2.601 ff, 2.701 ff
Single load, 2.701 ff
Single wire, 5.106, 10.701 ff
Site selection, 1.108, 4.101 ff
Site survey, 1.108, 4.201 ff
Slab, 7.502
Slenderness ratio, 5.501 ff
Sliding, 3.501, 3.503, 3.701, 3.708, 5.203 ff
Sliding wedge, 3.501
Slope failure, 3.301 ff
Soil bearing, 3.102, 3.508, 3.701, 3.902
Soil failure, 3.302 ff, 3.601
Soil investigation, 3.101, 4.301 ff, 4.309
Soil protection, 3.505, 9.401
Soil weight, 3.501
Soils, 3.101 ff, 4.306 ff
Solid rounds, 7.502
Spanning cables, 2.301, 2.304, 9.307, 10.208, 10.801
Spans, 2.301 ff, 2.305, 2.401, 2.403, 2.501
Specification, 2.301 ff, 2.401 ff, 7.301 ff, 7.401 ff, 7.501 ff
Spiral cable, 5.105, 5.203 ff
Stability, 3.501 ff, 3.701, 3.708
Stabilizing cables, 2.304

Standard

design, 2.301 ff, 2.401 ff, 2.501, 2.601 ff
drawing, 2.305, 2.404
spans, 2.301 ff, 2.305, 2.401, 2.403, 2.501
steelparts, 9.309, 10.604, 13.101 ff, 13.201 ff
suspended bridge, 1.101 ff, 2.102, 2.401 ff, 7.301 ff, 9.309, 13.201 ff
suspension bridge, 1.101 ff, 2.101, 2.301 ff, 7.401, 13.101 ff
Statical calculation, 2.801
Steam, 3.508
Steel, 5.501 ff, 7.501 ff
Steel construction, 7.301 ff, 7.401 ff, 7.501 ff, 13.101 ff, 13.201 ff
Steelparts, 9.309, 10.604, 13.101 ff, 13.201 ff
Steel temperature, 3.917
Step method, 4.211 ff
Stiffness, 2.401, 2.601
Stones, 9.101
Storage, 7.503
Storage points, 7.601
Straightening, 7.501
Stresses, 5.501
Stresses in gravity wall, 3.508
Structure stability, 3.503
Sukhadik Bouldik, 1.114
Survey, 1.108, 4.201 ff
Suspender, 2.203, 2.401, 2.804, 10.301 ff
Swedish circle methods, 3.302 ff, 3.601

T

Tacheometric survey, 4.204, 4.206 ff
Tangent, 3.912
Task, Purpose, 12.101
Technical Data, 2.301 ff, 2.401 ff, 2.501
Technical report, 4.101 ff
Temperature, 2.805, 3.917
Temporary erection fittings
cables, 10.101 ff
foundation, 10.101 ff
hooks, 10.101 ff
Tension, 2.303 ff, 2.403, 2.601 ff, 2.701 ff
Terms of steelwork, 7.501 ff
Test, 7.503, 9.203, 9.205, 13.203
Test assembly, 7.301, 7.401, 7.503
Thanatar, 5.205
Theodolite, 4.206, 4.219 ff
Thimbles, 5.201, 10.802
Timber, 5.501
Timbering, 3.201, 9.301
Tirfor, 6.301 ff, 10.401

Toe, 3.508
Tools, 6.401, 7.202 ff, 7.222 ff
Top soil, 3.401, 3.801 ff, 9.201
Torsteel, 5.305
Toughness, 4.306
Tower, uncorrect name, because we are dealing with
hinged systems - i.e. pylons
Transport, 7.201, 7.221, 7.601, 12.101
Transport routes, distances, 4.104, 7.601 ff
Trench, 3.201, 3.401, 9.201
Trench timbering, 3.201
Triangulation, 4.208
Trigonometry, 3.912
Tunnel excavation, 3.601
Types
trail suspension and suspension bridges, 1.101 ff, 2.301 ff, 2.401 ff
walls, 3.504

U

Uniformly loaded cable, 2.601 ff
Unreeling, 5.101 ff
Uplift capacity, 3.801
USAID, 1.301

V

Vane test, 4.304
Vertical reactions on the pylon base, 2.304, 2.807
Volume, 3.915 ff

W

Walk way, 2.101, 2.301, 2.401 ff, 7.301, 7.401, 9.305, 10.302, 10.602
Walls
anchor wall, 3.801 ff
breast wall, 3.505
butteressed wall, 3.504
cantilever wall, 3.504 3.508
counterfort wall, 3.504
deadman, 3.801 ff
design, 3.507
drainage, 3.401
drystone, 3.505
earth pressure, 3.102, 3.501 ff, 3.801, 3.804

Walls (continuation)

- gabion, 3.301, 3.504, 9.401
- gravity wall, 3.503, 3.507, 3.508
- placing, 3.301 ff
- sliding, 3.501, 3.503, 3.708, 3.801
- stability, 3.503
- structural components, 3.503, 3.506 ff
- types, 3.503 ff
- water, 3.401, 3.505
- Weep holes, 3.401, 3.505
- Weights of
 - cable, 5.103 ff
 - cable fittings, 5.201 ff
 - steel, 5.301 ff
 - soil, 3.501
- Welding, 7.502, 7.503
- Wind
 - bracing, 2.501
 - cable, 2.501
 - guy, 2.501, 2.808, 10.402
 - guy anchor block, 3.703, 3.803, 3.905 ff, 8.106 ff
 - load, 2.301, 2.401, 2.501
 - load carrying systems, 2.501
 - tie, 2.501, 2.808, 10.402, 10.403
- Wire, 5.106, 10.701 ff
- Wire mesh netting, 2.301, 2.401, 7.218, 7.235
- Wood, 5.501, 7.205, 7.225
- Wooden deck, 2.403, 2.803, 5.501, 7.218, 7.235
- World Bank, 1.301
- Work execution, 7.101, 7.220, 9.101 ff, 10.101 ff, 12.101
- Workshop, 7.301 ff, 7.401 ff, 7.501 ff, 13.101 ff, 13.201 ff

Refer to contents list for additional information

